MINMAX®

MSCEU01-HI Series
Electric Characteristic Note

MSCEU01-HI Series EC Note

DC-DC CONVERTER 1W, Ultra-High Isolation, SMD Package

Features

- **Industrial Standard SMD Package**
- **Encapsulated 1W Converter**
- **Ultra-high I/O Isolation 8000VDC with Reinforced Insulation, rate for 480Vrms Working Voltage**
- **Wide Operating Ambient Temp. Range**
- **Short Circuit Protection**
- **UL/cUL/IEC/EN 62368-1 Safety Approval**

Applications

- Distributed power architectures
- Workstations
- Computer equipment
- Communications equipment

Product Overview

The MINMAX MSCEU01-HI Series is an encapsulated 1W DC-DC converter in an industrial SMD package, designed for applications requiring exceptional isolation performance and compact PCB integration. This series includes 15 models supporting 5 VDC, 12 VDC, and 24 VDC input voltages, offering designers flexibility across a wide range of system architectures. Featuring ultra-high 8000 VDC I/O isolation with reinforced insulation rated for 480 Vrms working voltage, it provides outstanding protection for sensitive circuits in high-voltage or safety-critical environments.

With a wide operating ambient temperature range, built-in short-circuit protection, and certification to UL/cUL/IEC/EN 62368-1, the MSCEU01-HI Series ensures reliable, safe, and long-term operation in compact industrial and embedded designs. Its robust isolation, SMD form factor, and production-friendly characteristics make it an excellent choice for advanced industrial control, measurement, and high-voltage system applications.

Table of contents

Model Selection Guide P2
Input Specifications P2
Output Specifications P2
Output Voltage Tolerance P2
Isolation, Safety Standards P3
General Specifications P3
EMC Specifications P3
Environmental Specifications P3
Characteristic Curves P4
Package Specifications P19
Test Setup P20
Technical Notes P20
Packaging Information for Tube P21
Packaging Information for Tape & Reel P21
Soldering and Reflow Considerations P22
Part Number Structure P23
MTBF and Reliability P23

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Max. capacitive Load	Efficiency (typ.)
			Max.	@Max. Load	@No Load		@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	μF	%
MSCEU01-05S05HI	5 (4.5 ~ 5.5)	5	200	263	50	220	76
MSCEU01-05S12HI		12	84	252			80
MSCEU01-05S15HI		15	68	246			83
MSCEU01-05D12HI		±12	±42	252		100#	80
MSCEU01-05D15HI		±15	±33	236			84
MSCEU01-12S05HI	12 (10.8 ~ 13.2)	5	200	110	35	220	76
MSCEU01-12S12HI		12	84	106			79
MSCEU01-12S15HI		15	68	106			80
MSCEU01-12D12HI		±12	±42	106		100#	79
MSCEU01-12D15HI		±15	±33	103			80
MSCEU01-24S05HI	24 (21.6 ~ 26.4)	5	200	55	20	220	76
MSCEU01-24S12HI		12	84	53			80
MSCEU01-24S15HI		15	68	53			80
MSCEU01-24D12HI		±12	±42	53		100#	80
MSCEU01-24D15HI		±15	±33	52			80

*Please refer to the attached graph for the minimum load value. # For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Input Filter	All Models	Internal Capacitor			

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	±1.0	±3.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.1	±1.0	%
Line Regulation	For Vin Change of 1%	---	±1.2	±1.5	%
Load Regulation	Io=10% to 100%	See Model Selection Guide			
Ripple & Noise	0-20 MHz Bandwidth	---	---	100	mV P-P
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection	Continuous, Automatic Recovery				

Output Voltage Tolerance

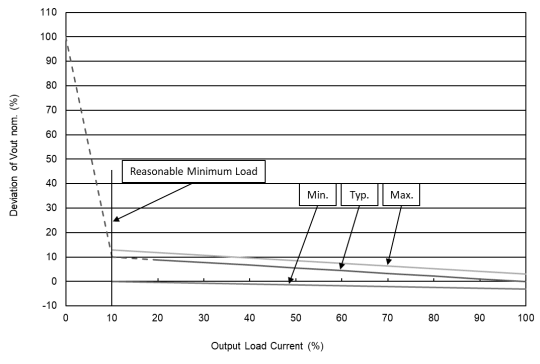

Output Voltage VS Output Load Current

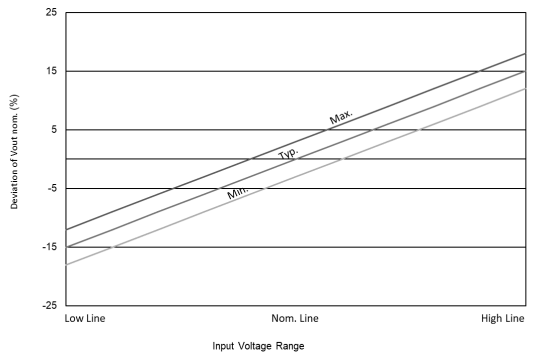

Output Voltage VS Input Voltage Range

Isolation, Safety Standards

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds Reinforced insulation, rated for 480Vrms working voltage	3000	---	---	VAC
	Tested for 1 second	8000	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	20	---	pF
Safety Approvals	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1(CB-report)				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		---	55	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25℃, Ground Benign	4,771,507	---	---	Hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 2			

EMC Specifications

Parameter	Standards & Level			Performance
$EMI_{(5)}$	Conduction	EN 55032	With external components	Class A
	Radiation		Without external components	
$EMS_{(5)}$	EN 55035			
	ESD	EN 61000-4-2 Air ± 15kV , Contact ± 8kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 ±2kV		A
	Surge	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 100A/m (1 min.), 1000A/m (1 sec.)		A

Environmental Specifications

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+95	℃
Case Temperature	---	+105	℃
Storage Temperature Range	-50	+125	℃
Humidity (non condensing)	---	95	% rel. H
Lead-free Reflow Solder Process	IPC/JEDEC J-STD-020D.1		

Notes

1 Specifications typical at Ta=+25℃, resistive load, nominal input voltage and rated output current unless otherwise noted.
2 Please do not operate the product without a minimum load condition.
3 We recommend to protect the converter by a slow blow fuse in the input supply line.
4 Other input and output voltage may be available, please contact MINMAX.
5 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
6 Specifications are subject to change without notice.
7 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-05S05HI

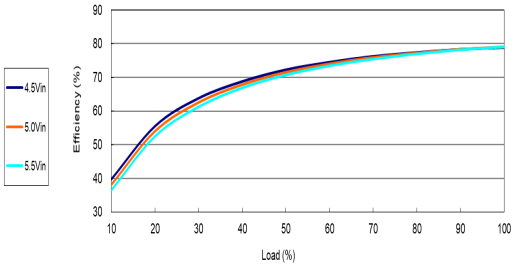

Efficiency Versus Output Current

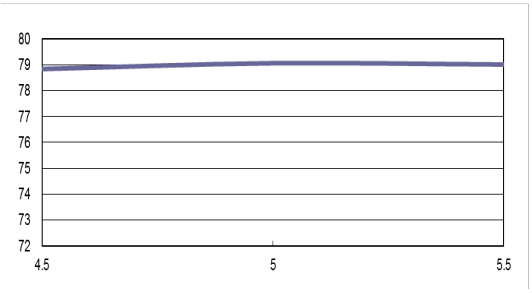

Efficiency Versus Input Voltage
Full Load

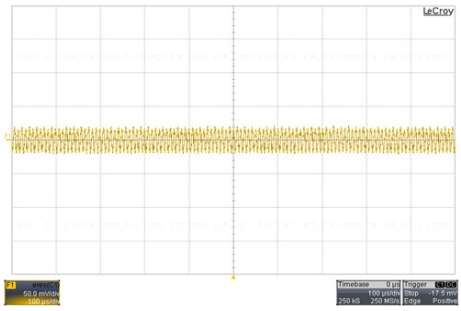

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

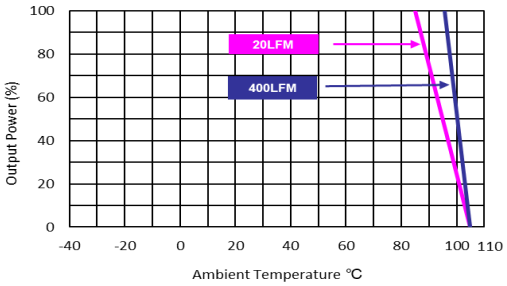

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-05S12HI

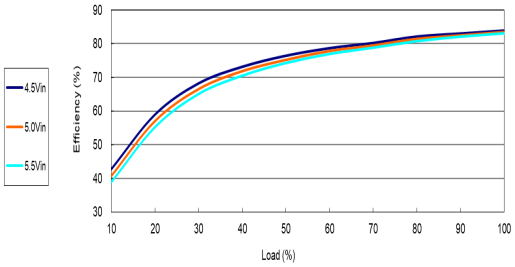

Efficiency Versus Output Current

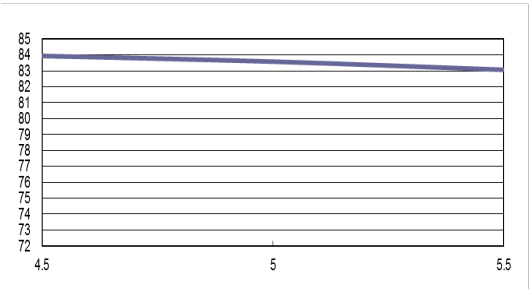

Efficiency Versus Input Voltage
Full Load

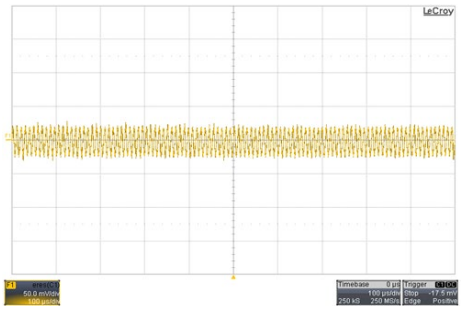

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

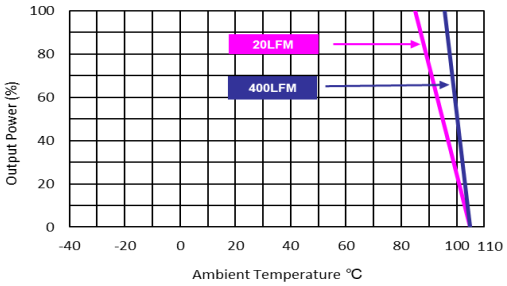

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-05S15HI

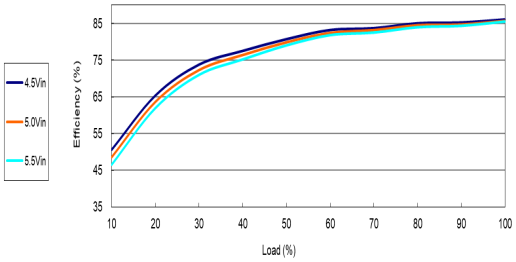

Efficiency Versus Output Current

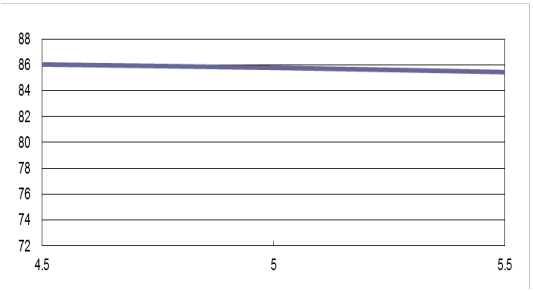

Efficiency Versus Input Voltage
Full Load

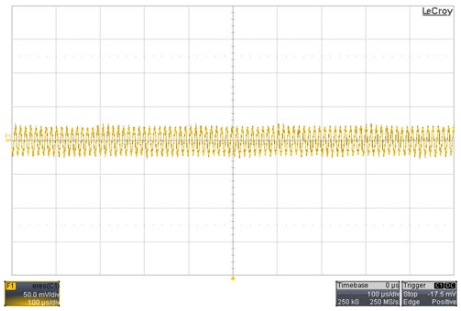

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

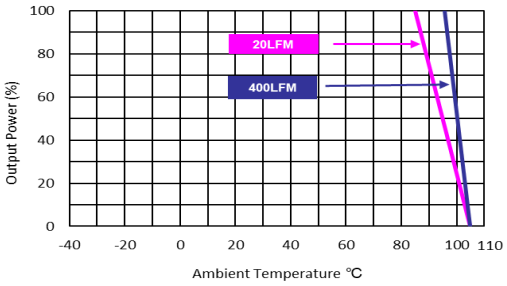

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-05D12HI

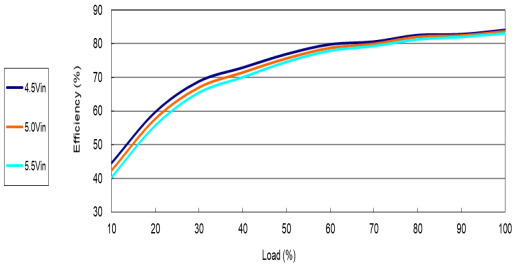

Efficiency Versus Output Current

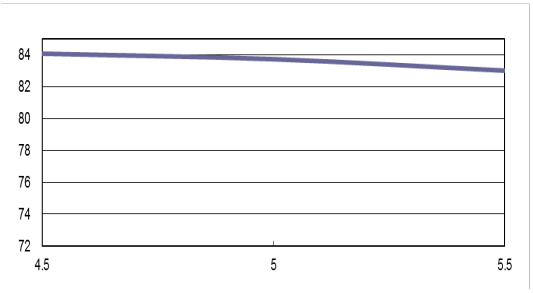

Efficiency Versus Input Voltage
Full Load

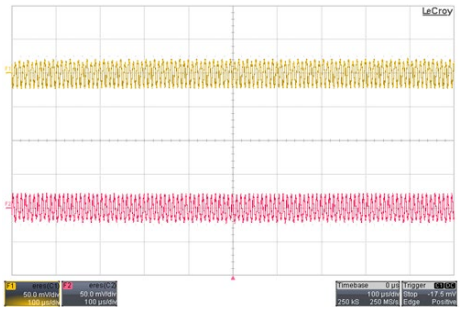

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

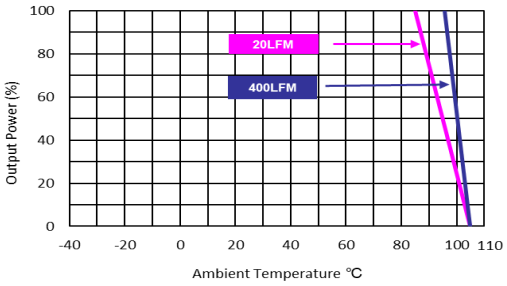

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-05D15HI

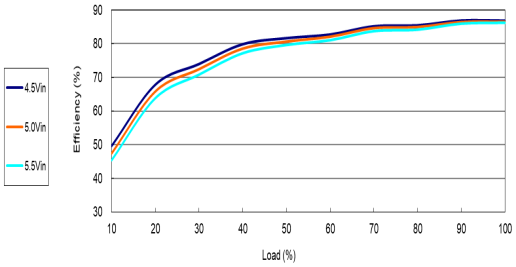

Efficiency Versus Output Current

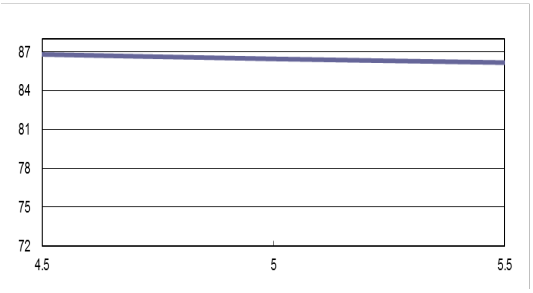

Efficiency Versus Input Voltage
Full Load

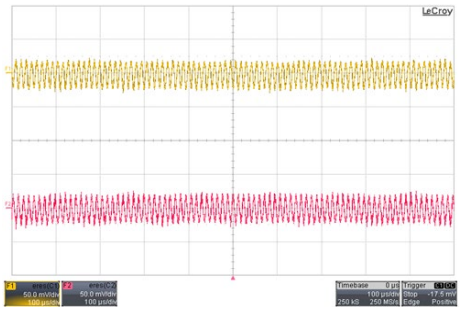

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

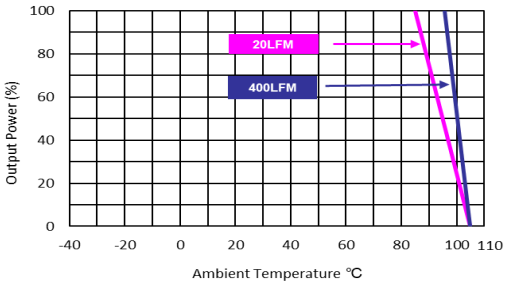

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-12S05HI

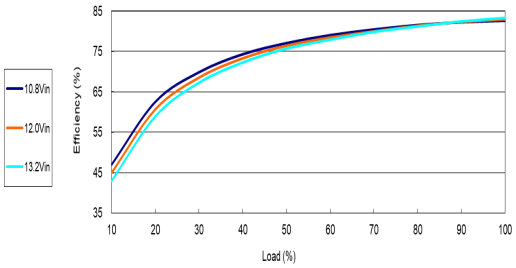

Efficiency Versus Output Current

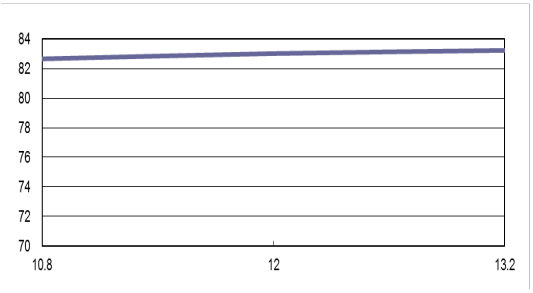

Efficiency Versus Input Voltage
Full Load

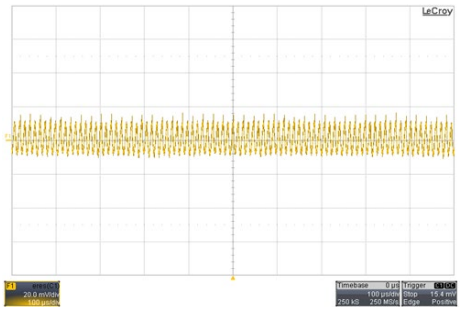

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

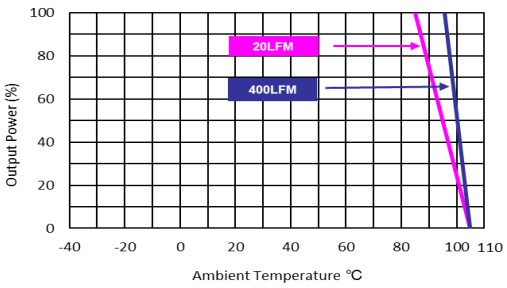

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-12S12HI

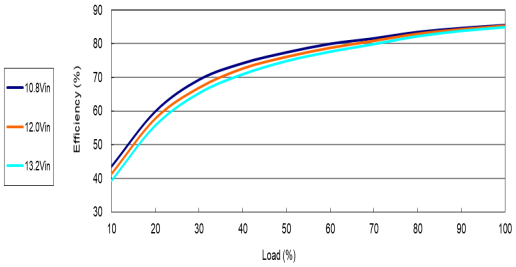

Efficiency Versus Output Current

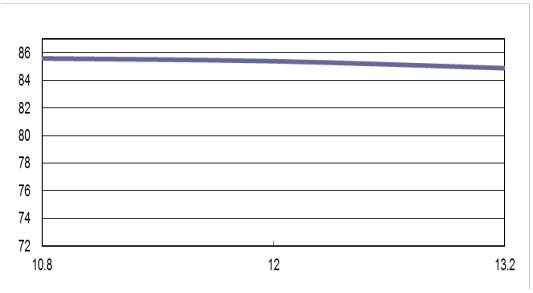

Efficiency Versus Input Voltage
Full Load

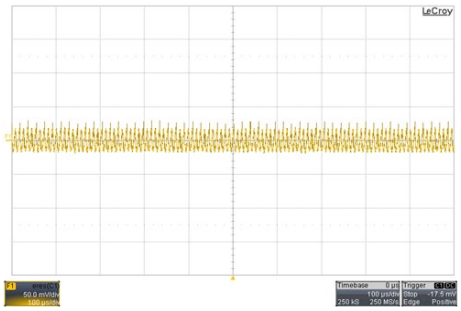

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

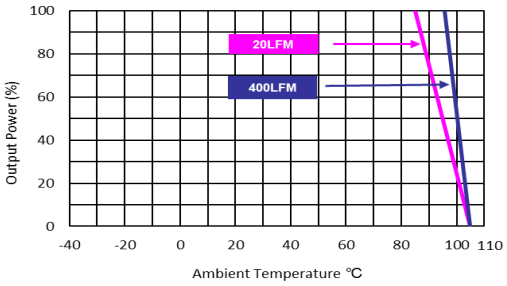

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-12S15HI

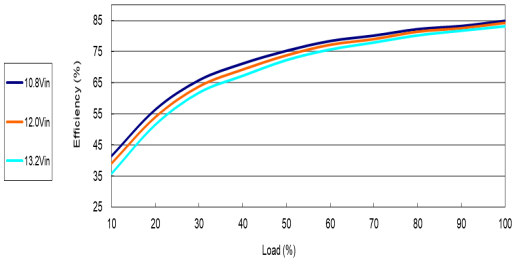

Efficiency Versus Output Current

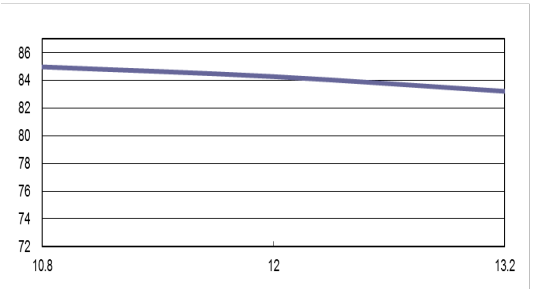

Efficiency Versus Input Voltage
Full Load

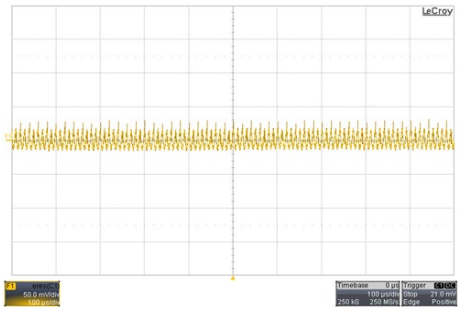

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

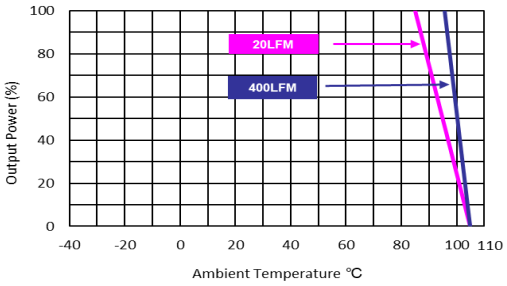

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-12D12HI

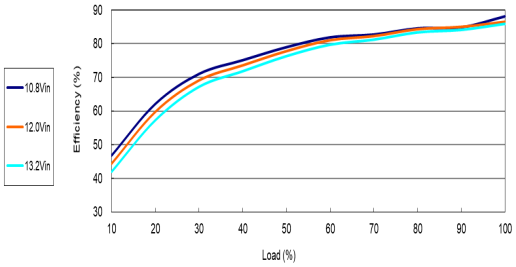

Efficiency Versus Output Current

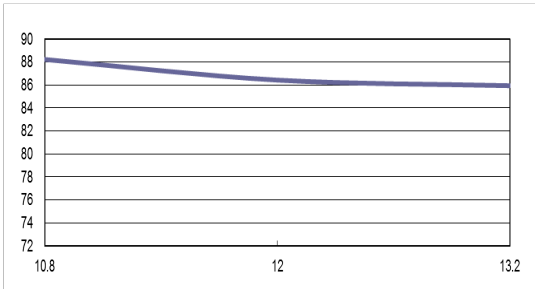

Efficiency Versus Input Voltage
Full Load

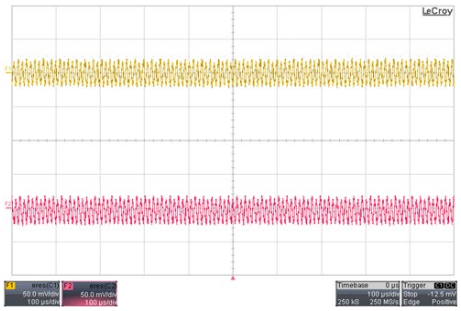

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

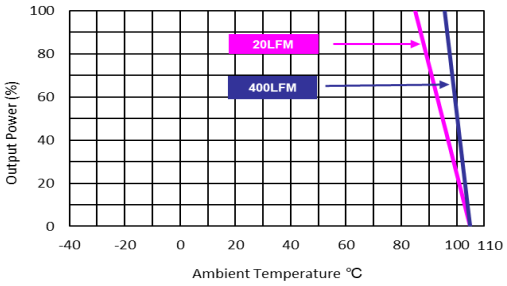

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-12D15HI

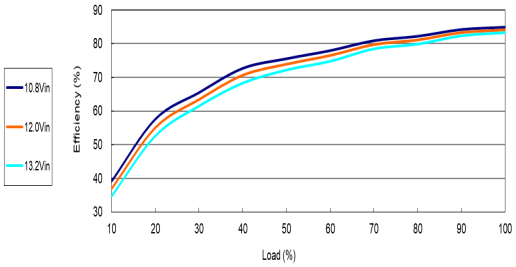

Efficiency Versus Output Current

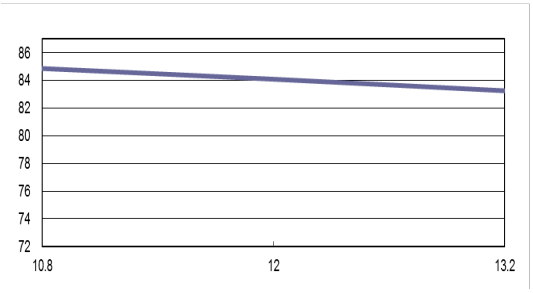

Efficiency Versus Input Voltage
Full Load

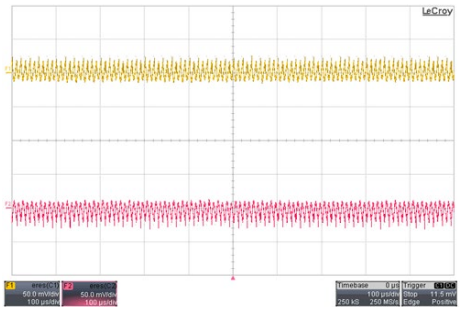

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

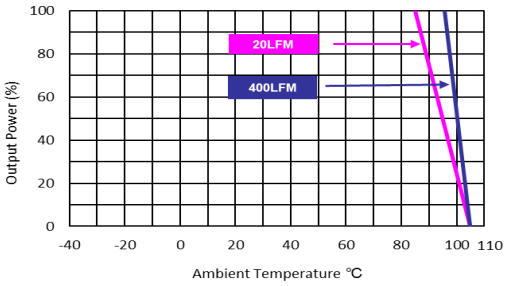

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-24S05HI

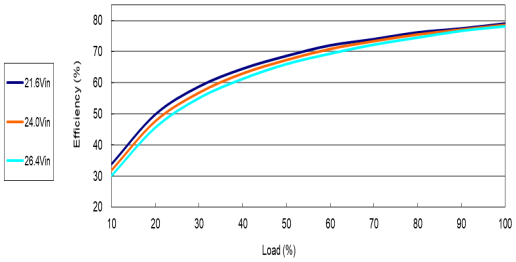

Efficiency Versus Output Current

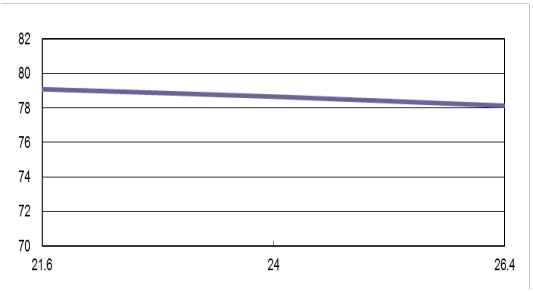

Efficiency Versus Input Voltage
Full Load

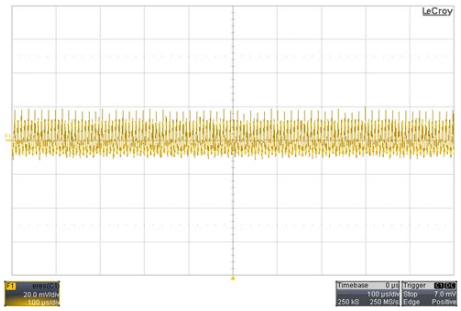

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

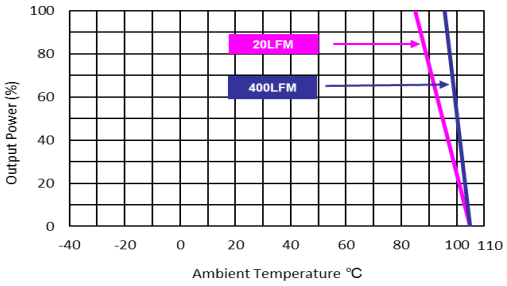

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-24S12HI

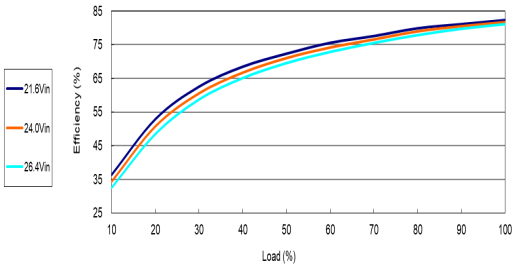

Efficiency Versus Output Current

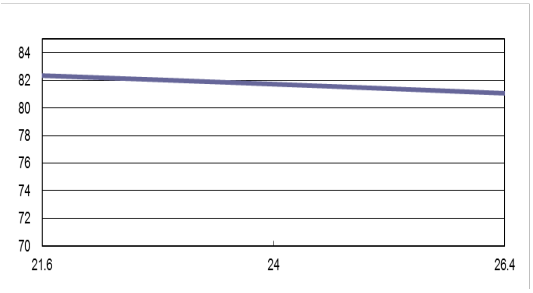

Efficiency Versus Input Voltage
Full Load

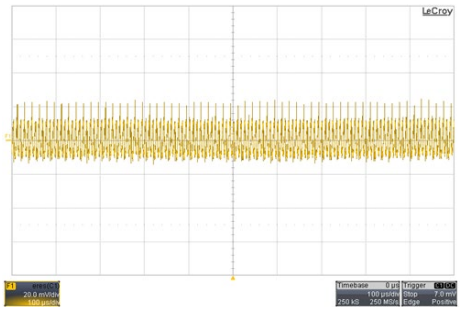

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

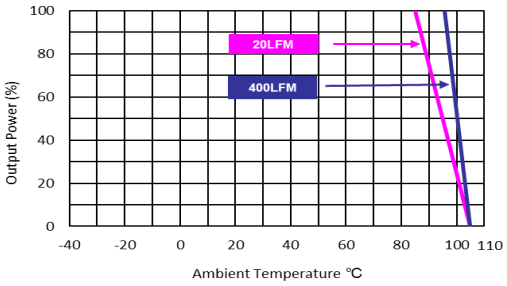

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-24S15HI

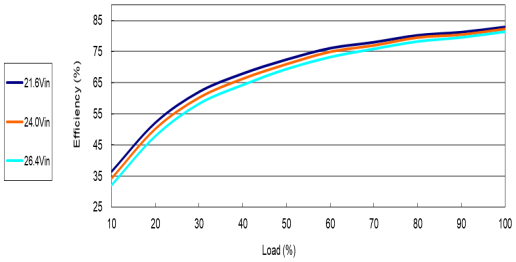

Efficiency Versus Output Current

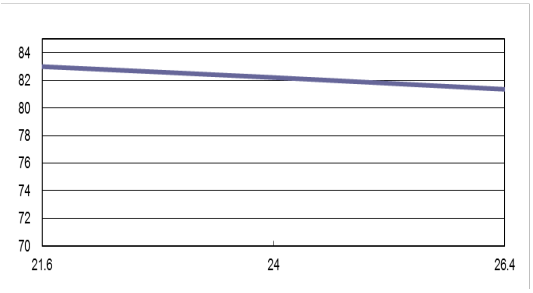

Efficiency Versus Input Voltage
Full Load

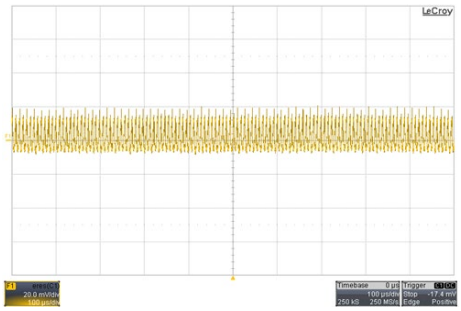

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

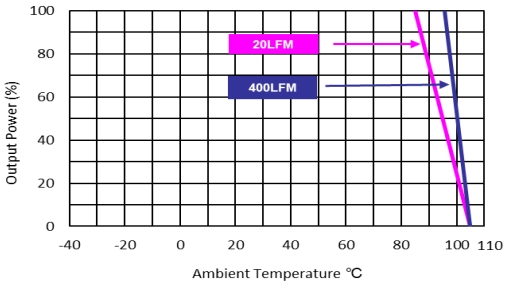

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-24D12HI

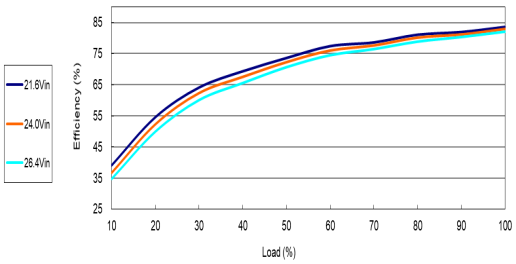

Efficiency Versus Output Current

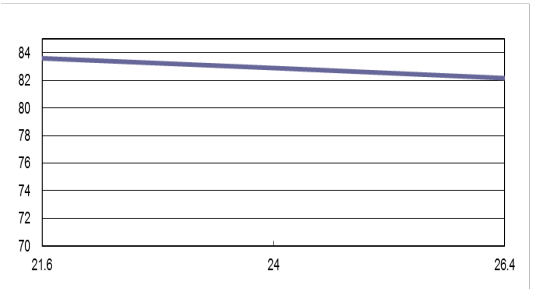

Efficiency Versus Input Voltage
Full Load

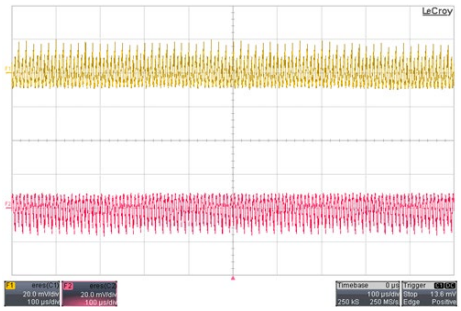

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

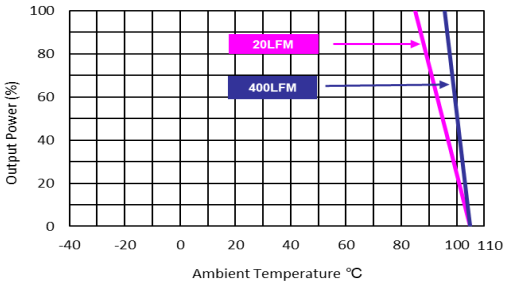

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-24D15HI

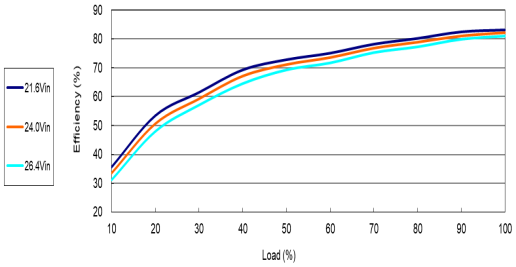

Efficiency Versus Output Current

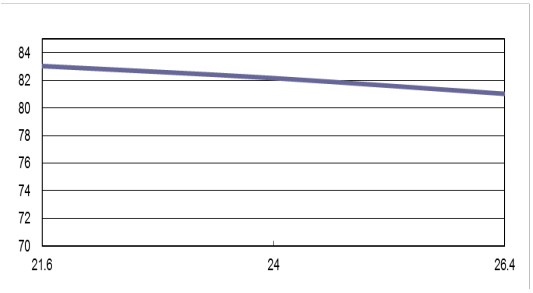

Efficiency Versus Input Voltage
Full Load

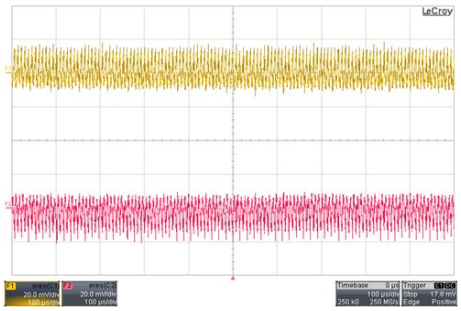

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

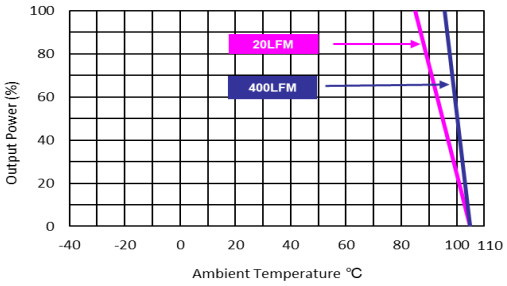

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Package Specifications

Mechanical Dimensions

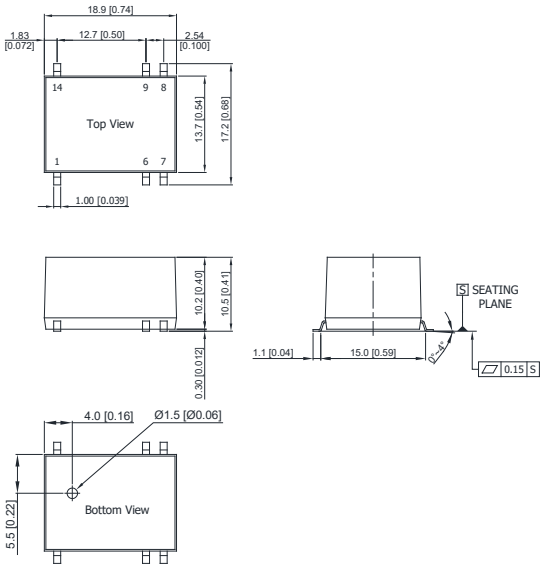

Connecting Pin Patterns

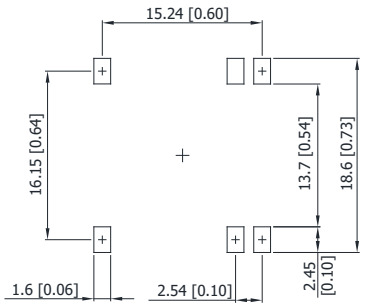

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
  X.XX±0.25 (X.XXX±0.010)
- Pins ±0.05 (±0.002)

Pin Connections

Pin	Single Output	Dual Output
1	-Vin	-Vin
6	NC	Common
7	NC	-Vout
8	+Vout	+Vout
9	-Vout	Common
14	+Vin	+Vin

NC: No Connection

Physical Characteristics

Case Size	:	18.9x13.7x10.2 mm (0.74x0.54x0.40 inches)
Case Material	:	Plastic resin (flammability to UL 94V-0 rated)
Pin Material	:	Phosphor Bronze
Weight	:	4.1g

Test Setup

Peak-to-Peak Output Noise Measurement Test

Refer to the output specifications or add 4.7µF capacitor if the output specifications undefine Cout. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

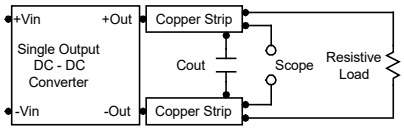

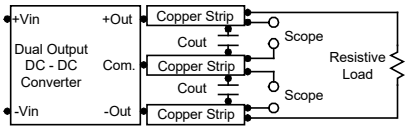

Technical Notes

Maximum Capacitive Load

The MSCEU01-HI series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 100µF maximum capacitive load for dual outputs and 220µF capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.
In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.
Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a 2.2µF for the 5V input devices, a 1.0µF for the 12V input devices and a 0.47µF for the 24V input devices.

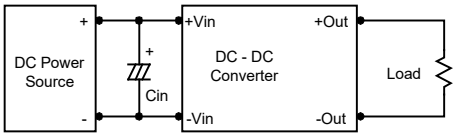

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3µF capacitors at the output.

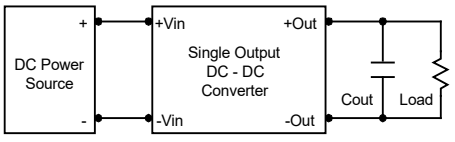

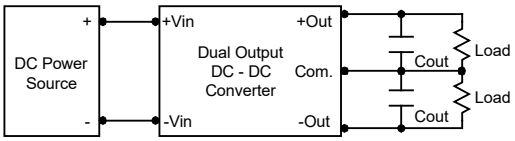

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.



Packaging Information for Tube

Tube

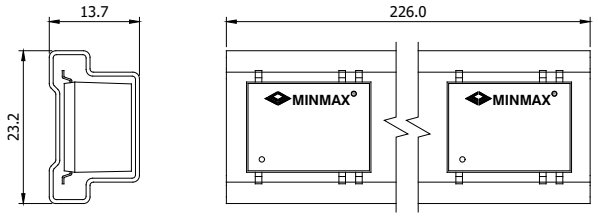

Plug



Unit: mm
10 PCS per TUBE

Packaging Information for Tape & Reel

Tape

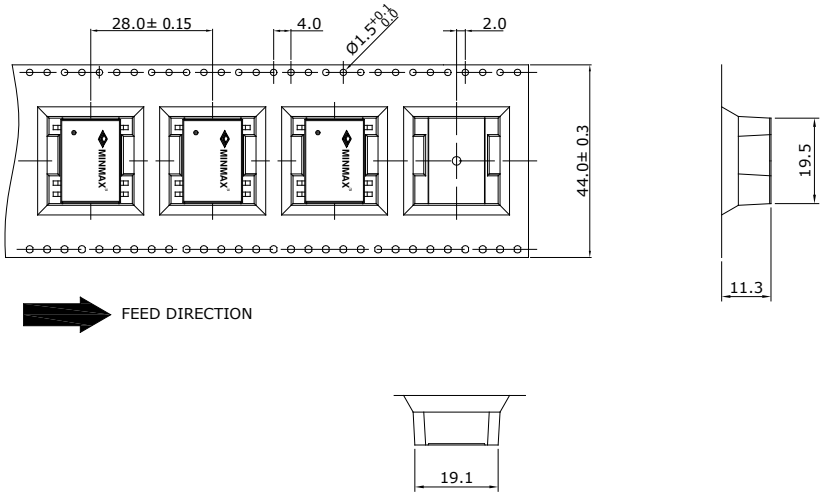

Reel

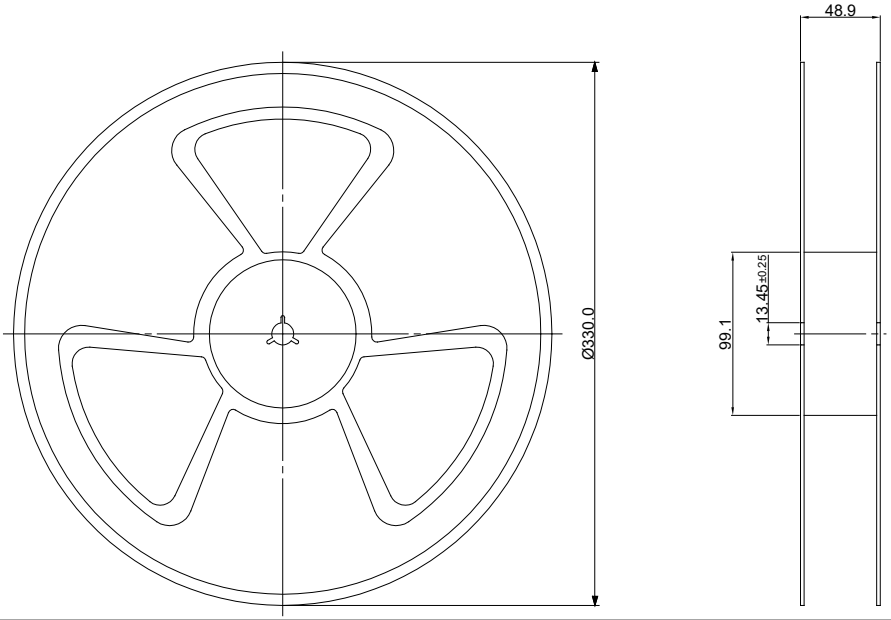

Packaging Style	Quantity
With Heatsink Tube	N/A
Tape and Reel to IEC 286-3 Specifications	200

Soldering and Reflow Considerations

Profile	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate(Ts max. To Tp)	3°C/second max.	3°C/second max.
Preheat · Temperature Min ($Ts_{min.}$) · Temperature Max ($Ts_{max.}$) · Time (Ts_{min} to Ts_{max}) (ts)	 100°C 150°C 60~120 seconds	 150°C 200°C 60~180 seconds
Time maintained above: · Temperature (T_L) · Time (t_L)	 183°C 60~150 seconds	 217°C 60~150 seconds
Peak Temperature (Tp)	See Table 4-1	See Table 4-2
Time within 5°C of actual Peak Temperature $(tp)^2$	10~30 seconds	20~40 seconds
Ramp-down Rate	6°C/second max.	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

Note 1: All temperatures refer to topside of the package, measured on the package body surface.
Note 2: Time within 5°C of actual peak temperature (tp) specified for the reflow profiles is a "supplier" minimum and "user" maximum.

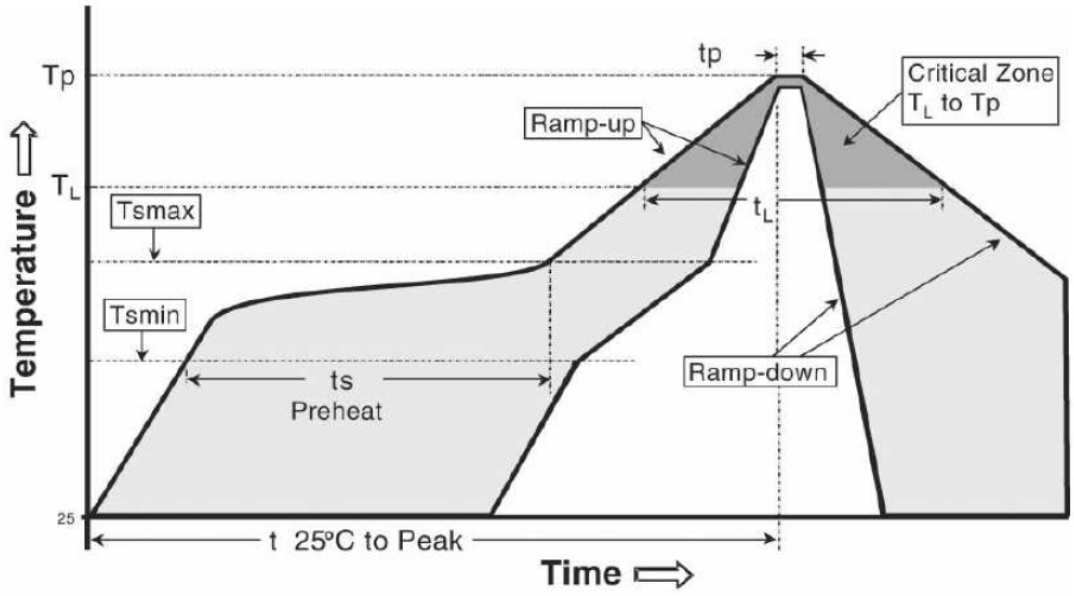

Table 4-1 SnPb Eutectic Process-Classification Temperatures (T_C)

	Volume mm^3	Volume mm^3
Package Thickness	<350	≥350
<2.5mm	235°C	220°C
≥2.5mm	220°C	220°C

Table 4-2 Pb-Free Process-Classification Temperatures (T_C)

	Volume mm^3	Volume mm^3	Volume mm^3
Package Thickness	<350	350-2000	>2000
<1.6mm	260°C	260°C	260°C
1.6mm-2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Part Number Structure

M	SC	EU	01	-	05	S	05	HI
	Package Type SMD-14	Application Ultra-High Isolation ±10% Input Range Output Regulation Unregulated	Output Power 1 Watt		Input Voltage Range 05: 4.5 ~ 5.5 VDC 12: 10.8 ~ 13.2 VDC 24: 21.6 ~ 26.4 VDC	Output Quantity S: Single D: Dual	Output Voltage 05: 5 VDC 12: 12 VDC 15: 15 VDC	I/O Isolation Voltage 8000 VDC

MTBF and Reliability

The MTBF of MSCEU01-HI series of DC-DC converters has been calculated using

MIL-HDBK 217F NOTICE2, Operating Temperature 25℃, Ground Benign.

Model	MTBF	Unit
MSCEU01-05S05HI	4,774,882	Hours
MSCEU01-05S12HI	5,042,214	
MSCEU01-05S15HI	5,239,310	
MSCEU01-05D12HI	5,042,214	
MSCEU01-05D15HI	5,303,730	
MSCEU01-12S05HI	4,771,507	
MSCEU01-12S12HI	4,974,054	
MSCEU01-12S15HI	5,039,132	
MSCEU01-12D12HI	4,974,054	
MSCEU01-12D15HI	5,039,132	
MSCEU01-24S05HI	4,774,937	
MSCEU01-24S12HI	5,042,198	
MSCEU01-24S15HI	5,040,895	
MSCEU01-24D12HI	5,042,198	
MSCEU01-24D15HI	5,040,895	