



# PRODUCT CATALOGUE

POWER FOR  
A BETTER FUTURE



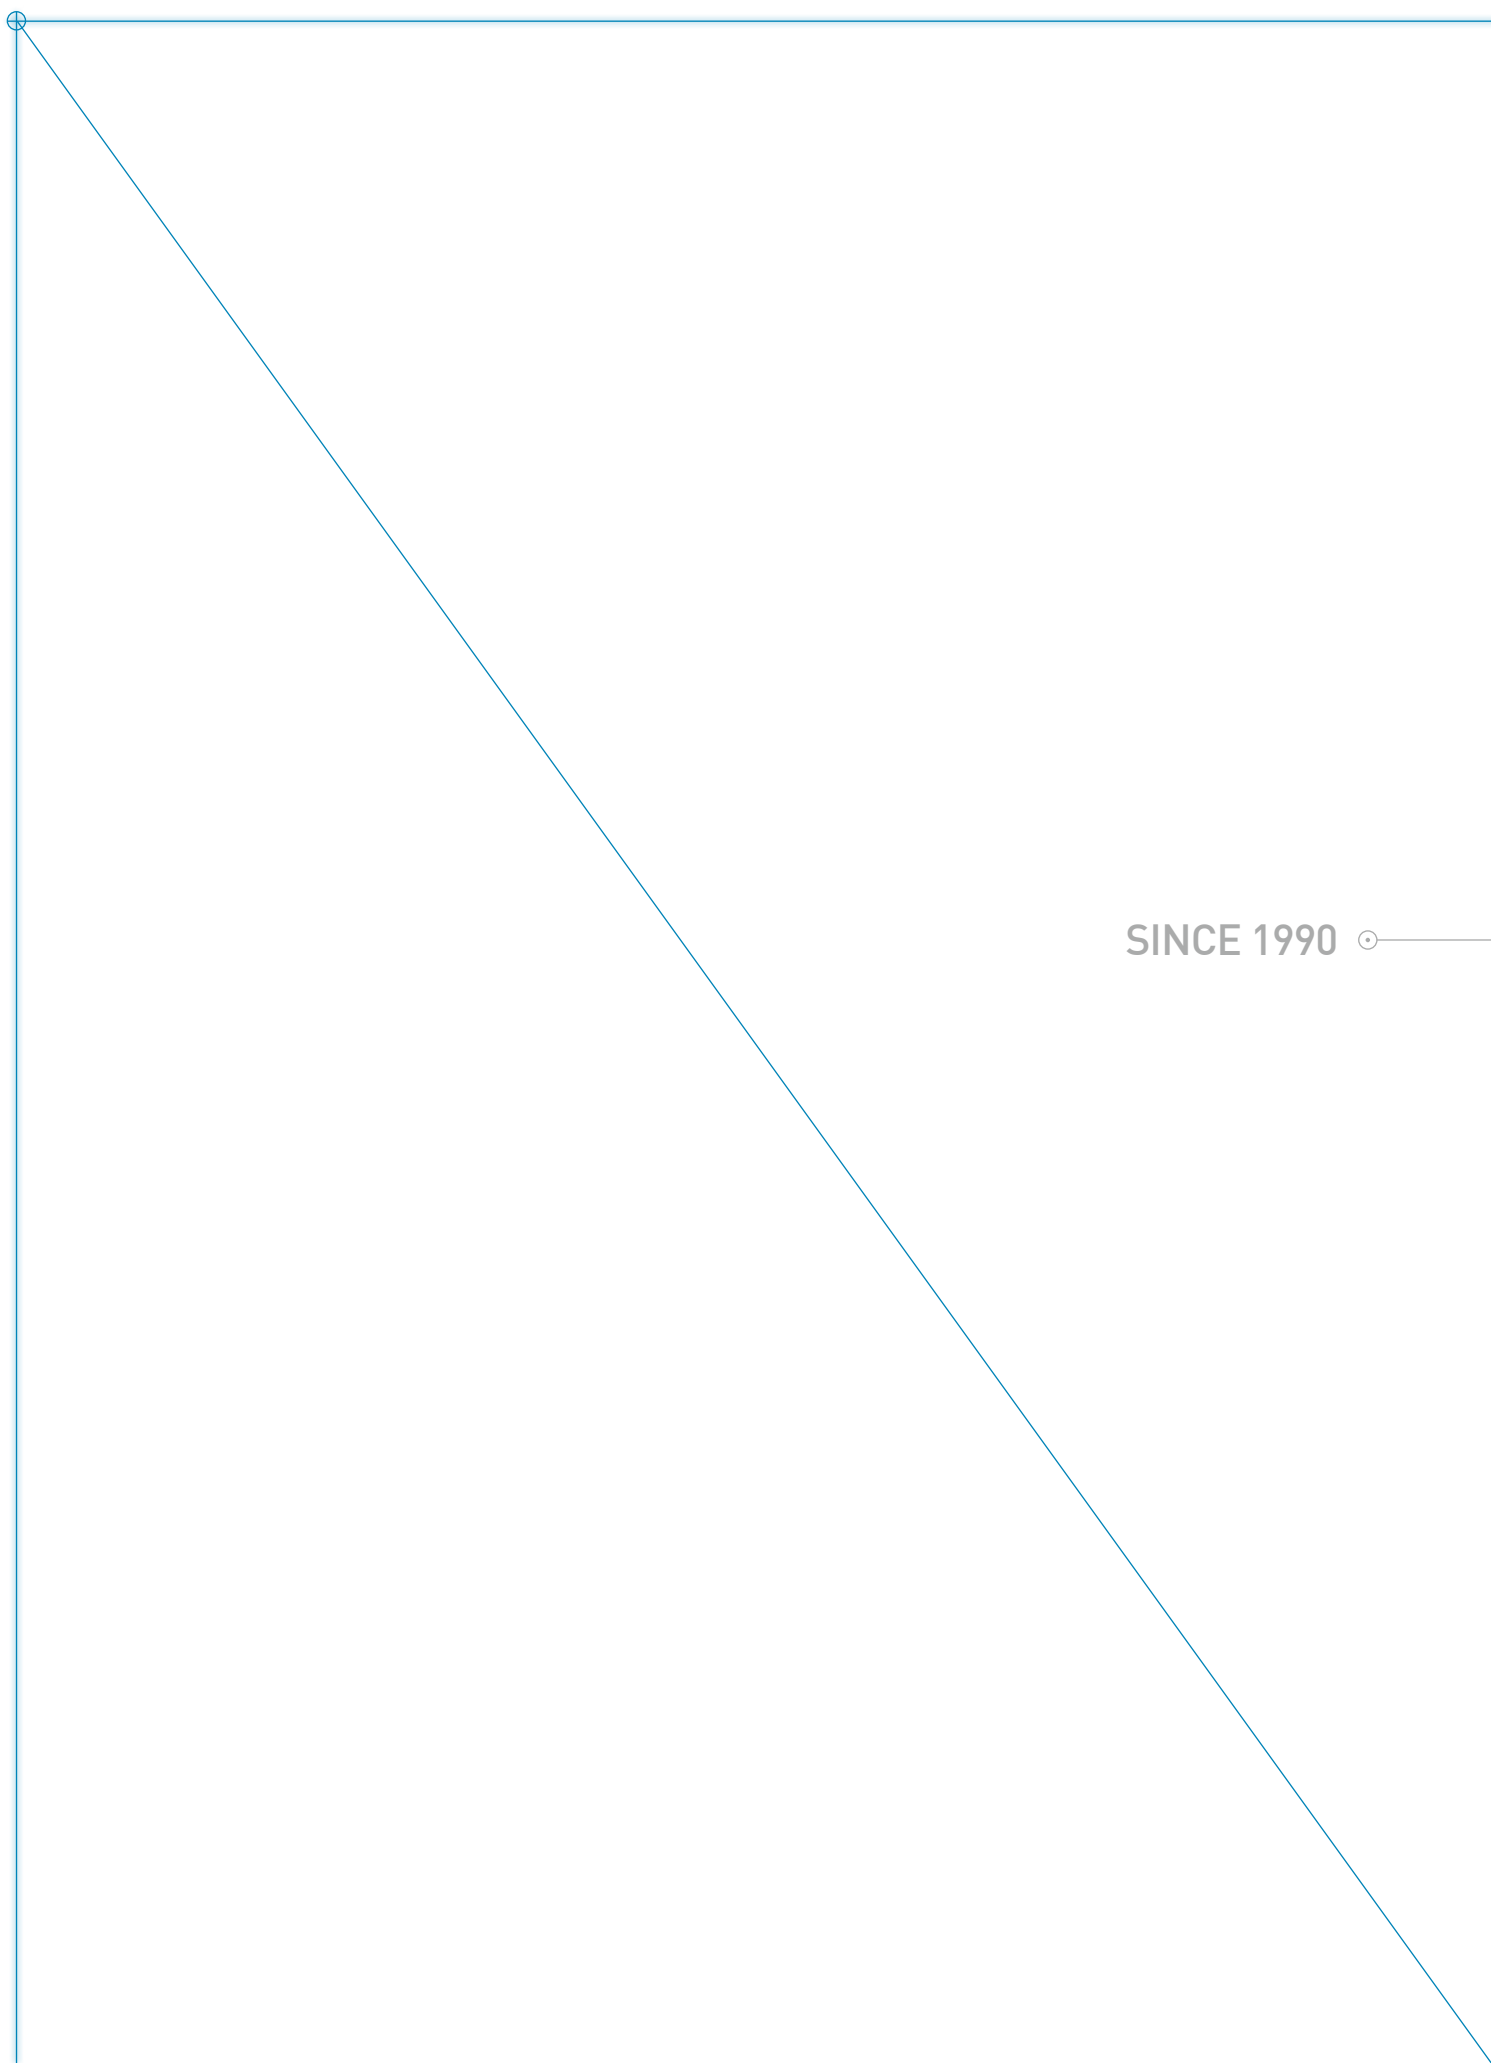

SINCE 1990 ◉

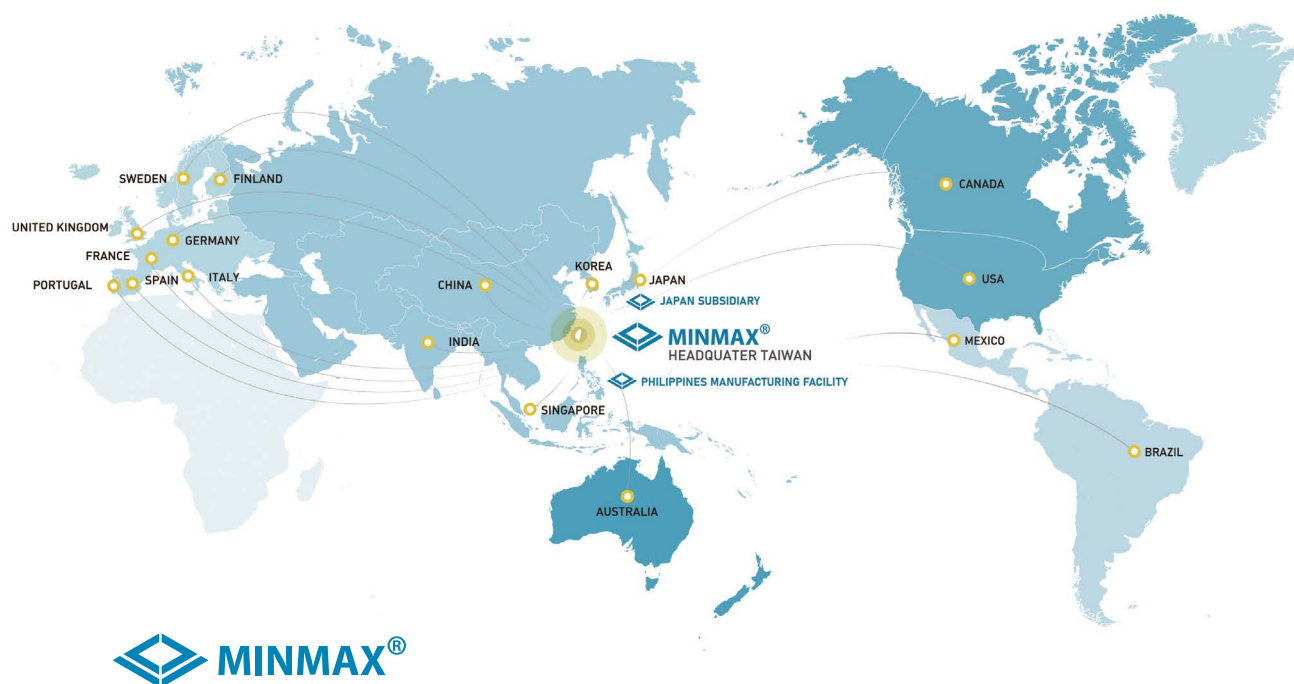

## ABOUT MINMAX

MINMAX TECHNOLOGY CO., LTD., founded in 1990, designs and manufactures miniaturized, isolated DC-DC and AC-DC power modules. We provide high-power density solutions for industrial automation, renewable energy, railway, medical, and other high-reliability applications.

We place strong emphasis on R&D, continuously investing in engineering talent, development tools, and in-house laboratory capabilities to enhance product performance and long-term reliability. To support global demand, MINMAX operates manufacturing in Taiwan and an expanded production site in the Philippines, enabling scalable capacity, stable quality, and competitive lead times.

With integrated capabilities spanning design, manufacturing, marketing, sales, and after-sales support, MINMAX serves customers worldwide with consistent quality, fast delivery, and responsive technical service. We maintain an international presence through overseas branches and sales offices across APAC, EMEA, and the Americas, including operations in the United States, Europe, China, Japan, South Korea, and India.

In Japan, MINMAX JAPAN (MMJ) serves as our dedicated local branch, providing closer sales coverage and engineering support.



**30<sup>+</sup>**  
years

In Isolated  
Power Converters

**40<sup>+</sup>**  
Countries

Distributor  
Coverage

**5.7<sup>+</sup>**  
M  
pcs/year

Annual  
Shipments

**200<sup>+</sup>**  
Series

Product  
Development

POWER FOR A  
BETTER FUTURE



## Trusted power for smarter systems worldwide.

At MINMAX, we believe better systems start with better power.

By focusing on miniaturized, isolated power solutions, we help our customers build equipment that is smaller, cleaner, and more dependable – for today and for the future.

### WHAT WE STAND FOR



Powering  
Innovation



Powering  
Reliability



Powering  
Sustainability



Powering  
Partnership

Find more MINMAX information at [www.minmaxpower.com](http://www.minmaxpower.com)

## KEY APPLICATIONS



Railway  
Applications



Industrial  
Applications



Medical  
Applications




Ultra-High  
Isolation  
Applications

## MINIATURIZED HIGH-DENSITY POWER

MINMAX power converters deliver miniaturized, high-power-density solutions with outstanding electrical performance and proven reliability.

Their compact footprints free up valuable PCB space and make system integration easier, while maintaining stable operation in demanding industrial, medical, and railway applications.

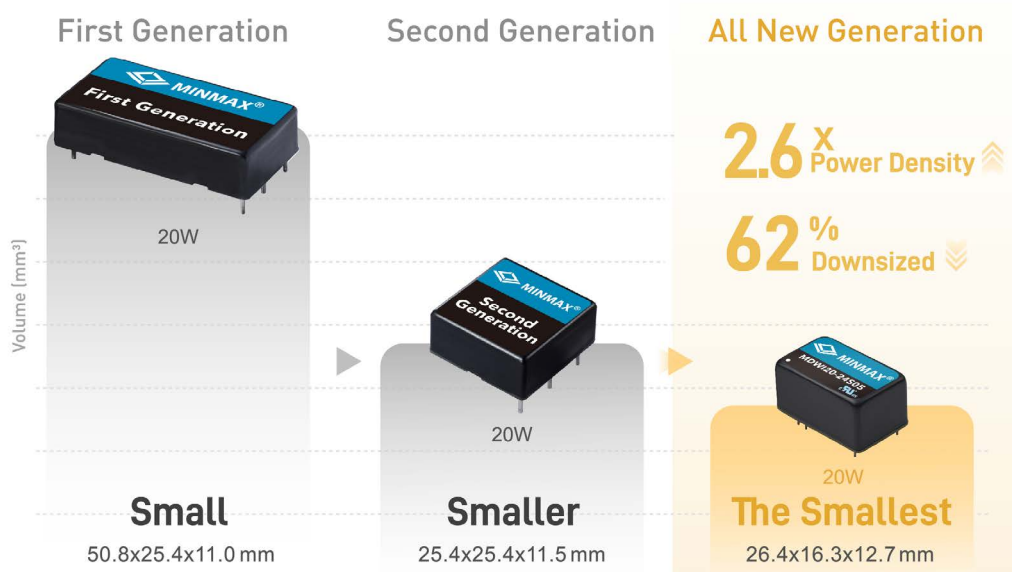


## OPTIMIZED INTERNAL DESIGN

Thermal Management  
Design Optimization

Advanced  
Production  
Procedure

PCB Layout Design  
Optimization

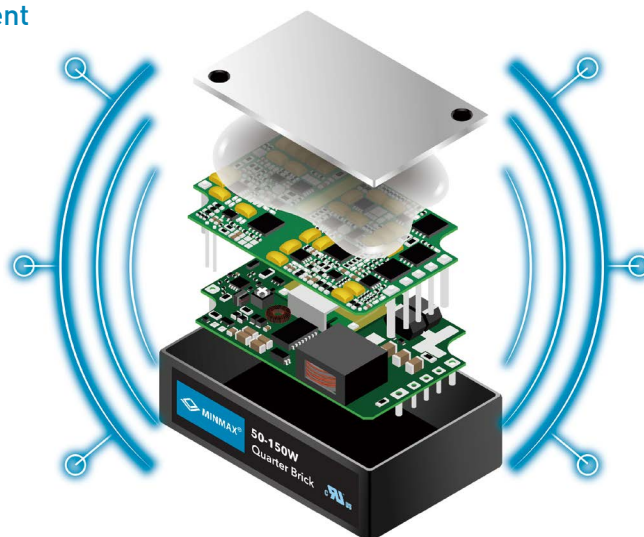

Advanced Circuit  
Design

Overall Electrical  
Performance  
Optimization

High Performance,  
Reliable and  
Micro-sized Components

# 2026 NEW PRODUCTS



POWER FOR A  
BETTER FUTURE

**Maximum Power. Minimal Space!**  
SIP-8 Isolated 10W DC-DC Converters

# MCWI10 **NEW** Series

Ultra-high Power Density

**65W/in<sup>3</sup>**

Excellent Efficiency

up to **89%**

Ultra-wide Input Range

**4:1** for 4.5-18, 9-36, 18-75 VDC

Real 10 Watt

**No Line Derating**

**81%  
Smaller**



21.8×9.6×12.0 mm



More Info.



Unleashing Power in Tiny Form.  
SIP-8 Isolated 10W DC-DC Converters

# MCWI08

## Series

**NEW**

Ultra-high Power Density

**52W/in<sup>3</sup>**

Excellent Efficiency

up to **88%**

Ultra-wide Input Range

**4:1** for 4.5-18, 9-36, 18-75 VDC

Real 8 Watt

**No Line Derating**

**81%  
Smaller**



21.8×9.6×12.0 mm



More Info.



2"×1" Industrial 80W DC-DC Converters

# MKW180 **NEW** Series

Ultra-high Power Density

**93W/in<sup>3</sup>**

Excellent Efficiency

up to **92%**

Ultra-wide Input Range

**4:1** for 9-36, 18-75 VDC

Real 80 Watt

**No Line Derating**

**100%**  
Higher Power Density



More Info.



1"×1" Industrial 40W DC-DC Converters

# MJWI40

## Series

NEW

Ultra-high Power Density

**93W/in<sup>3</sup>**

Excellent Efficiency

up to **93%**

Ultra-wide Input Range

**4:1** for 9-36, 18-75 VDC

Real 40 Watt

**No Line Derating**



**70%  
Smaller**



More Info.




Railway Certified | Quarter-Brick

# MRZI75

## Series


75W DC-DC Converters



Passed TCT  
1000+ Cycles



Excellent  
Efficiency



I/O Isolation  
2000 VAC



EN 50155  
Approved

More Info.



EN45545-2



UL 62368-1



CB  
Scheme



RoHS  
Compliant



CONFLICT FREE  
MINERALS POLICY



3  
YEAR  
WARRANTY

# ALL PRODUCTS



POWER FOR A  
BETTER FUTURE



## SIP Package DC-DC Converters, 1-10W

| Series     | Output Power | Input Voltage Range (VDC)                | Output Voltage (VDC)                                       | Output Regulation | Isolation (VDC) | Package | Safety | Page |
|------------|--------------|------------------------------------------|------------------------------------------------------------|-------------------|-----------------|---------|--------|------|
| MBU100     | 1W           | 2.97-3.63, 4.5-5.5, 10.8-13.2, 21.6-26.4 | 3.3, 5, 9, 12, 15                                          | -                 | 1000            | SIP-4   | -      | 18   |
| MAU100     | 1W           | 4.5-5.5, 10.8-13.2, 13.5-16.5, 21.6-26.4 | 3.3, 5, 9, 12, 15, $\pm 5$ , $\pm 9$ , $\pm 12$ , $\pm 15$ | -                 | 1000            | SIP-7   | •      | 19   |
| MA01       | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 5, 9, 12, 15, $\pm 5$ , $\pm 9$ , $\pm 12$ , $\pm 15$      | -                 | 1000            | SIP-7   | •      | 20   |
| MA01H      | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 5, 9, 12, 15                                               | -                 | 3000            | SIP-7   | •      | 21   |
| MAU200     | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 3.3, 5, 9, 12, 15, $\pm 5$ , $\pm 9$ , $\pm 12$ , $\pm 15$ | -                 | 3000            | SIP-7   | •      | 22   |
| MAPU01H    | 1W           | 2.97-3.63, 4.5-5.5, 10.8-13.2, 21.6-26.4 | 3.3, 5, 9, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$           | -                 | 3000            | SIP-7   | •      | 23   |
| MAW01      | 1W           | 4.5-9, 9-18, 18-36, 36-75                | 5, 12, 15, 24, $\pm 12$ , $\pm 15$                         | •                 | 1500            | SIP-6   | •      | 24   |
| MAU300     | 2W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$              | -                 | 1000            | SIP-7   | -      | 25   |
| MAPU02H    | 2W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 3.3, 5, 9, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$           | -                 | 3000            | SIP-7   | -      | 26   |
| MCW1000    | 2W           | 4.5-9, 9-18, 18-36, 36-75                | 3.3, 5, 12                                                 | •                 | 1000            | SIP-8   | •      | 27   |
| MCWI02     | 2W           | 4.5-18, 9-36, 18-75                      | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$              | •                 | 1500            | SIP-8   | •      | 28   |
| MEW1000    | 2W           | 9-36, 18-75                              | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$              | •                 | 1500            | SIP-9   | •      | 29   |
| MBSU03     | 3W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 5, 12, 15                                                  | -                 | 1500            | SIP-4   | •      | 30   |
| MA03       | 3W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 5, 9, 12, 15                                               | -                 | 1000            | SIP-7   | •      | 31   |
| MCW03      | 3W           | 4.5-9, 9-18, 18-36, 36-75                | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$              | •                 | 1600            | SIP-8   | •      | 32   |
| MCWI03     | 3W           | 4.5-18, 9-36, 18-75                      | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$              | •                 | 1600            | SIP-8   | •      | 33   |
| MCW04      | 4W           | 9-18, 18-36, 36-75                       | 5, 12, 15, 24, $\pm 12$ , $\pm 15$                         | •                 | 1600            | SIP-8   | •      | 34   |
| MCWI04     | 4W           | 9-36, 18-75                              | 5, 12, 15, 24, $\pm 12$ , $\pm 15$                         | •                 | 1600            | SIP-8   | •      | 35   |
| MCWI05     | 5W           | 4.5-18, 9-36, 18-75                      | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$                    | •                 | 1500            | SIP-8   | •      | 36   |
| NEW MCWI08 | 8W           | 4.5-18, 9-36, 18-75                      | 5, 12, 15, 24, $\pm 12$ , $\pm 15$                         | •                 | 1500            | SIP-8   | •      | 37   |
| NEW MCWI10 | 10W          | 4.5-18, 9-36, 18-75                      | 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$                       | •                 | 1500            | SIP-8   | •      | 38   |

## SMD Package DC-DC Converters, 1-6W

|           |    |                                          |                                                   |   |      |     |   |    |
|-----------|----|------------------------------------------|---------------------------------------------------|---|------|-----|---|----|
| MSLU100   | 1W | 4.5-5.5, 10.8-13.2, 13.5-16.5, 21.6-26.4 | 3.3, 5, 9, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$  | - | 1500 | SMD | • | 39 |
| MSLU300   | 1W | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | - | 3000 | SMD | - | 40 |
| MSPU01H   | 1W | 2.97-3.63, 4.5-5.5, 10.8-13.2            | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | - | 3000 | SMD | • | 41 |
| MSCW01    | 1W | 4.5-9, 9-18, 18-36, 36-75                | 5, 12, 15, $\pm 12$ , $\pm 15$                    | • | 1500 | SMD | • | 42 |
| NEW MSU01 | 1W | 2.97-3.63, 4.5-5.5, 10.8-13.2, 21.6-26.4 | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | - | 1500 | SMD | • | 43 |
| MSLU400   | 2W | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 3.3, 5, 12, $\pm 5$ , $\pm 12$ , $\pm 15$         | - | 1500 | SMD | - | 44 |
| MSDW1000  | 2W | 4.5-9, 9-18, 18-36, 36-75                | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | • | 1500 | SMD | • | 45 |
| MSCWI02   | 2W | 4.5-12, 9-36, 18-75                      | 5, 12, 15, 24, $\pm 12$ , $\pm 15$                | • | 1500 | SMD | • | 46 |
| NEW MSU02 | 2W | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | - | 1500 | SMD | • | 47 |
| MSDWI03   | 3W | 9-36, 18-75                              | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | • | 1500 | SMD | • | 48 |
| MSCWI03   | 3W | 4.5-12, 9-36, 18-75                      | 5, 12, 15, 24, $\pm 12$ , $\pm 15$                | • | 1500 | SMD | • | 49 |
| MSGWI06   | 6W | 9-36, 18-75                              | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | • | 1500 | SMD | • | 50 |

## DIP Package DC-DC Converters, 1-20W

| Series                                                                                     | Output Power | Input Voltage Range (VDC)        | Output Voltage (VDC)                              | Output Regulation | Isolation (VDC) | Package | Safety | Page |
|--------------------------------------------------------------------------------------------|--------------|----------------------------------|---------------------------------------------------|-------------------|-----------------|---------|--------|------|
| MFSU01                                                                                     | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4    | 5, 12, 15                                         | -                 | 1500            | DIP-8   | -      | 51   |
| MFU100                                                                                     | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4    | 5, 9, 12, 15                                      | -                 | 3000            | DIP-8   | •      | 52   |
| MFPU01H                                                                                    | 1W           | 2.97-3.63, 4.5-5.5, 10.8-13.2    | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | -                 | 3000            | DIP-8   | •      | 53   |
| MFW02                                                                                      | 2W           | 4.5-10, 9-18, 18-36, 36-75       | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | •                 | 1500            | DIP-8   | •      | 54   |
| MDW1000                                                                                    | 2W           | 4.5-9, 9-18, 18-36, 36-75        | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | •                 | 1500            | DIP-16  | •      | 55   |
| MFW03                                                                                      | 3W           | 4.5-10, 9-18, 18-36, 36-75       | 3.3, 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | •                 | 1500            | DIP-8   | •      | 56   |
| MDWI03                                                                                     | 3W           | 9-36, 18-75                      | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | •                 | 1500            | DIP-16  | •      | 57   |
| MIAR03                                                                                     | 3W           | 4.5-5.5, 10.8-13.2, 21.6-26.4    | 5, 12, 15, $\pm 12$ , $\pm 15$                    | •                 | 1500            | DIP-24  | •      | 58   |
| MIW1100                                                                                    | 3W           | 4.5-9, 9-18, 18-36, 36-75, 10-30 | 5, 12, 15, $\pm 12$ , $\pm 15$                    | •                 | 1500            | DIP-24  | •      | 59   |
| MIW03                                                                                      | 3W           | 4.5-9, 9-18, 18-36, 36-75        | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | •                 | 1500<br>3000    | DIP-24  | •      | 60   |
| MIWI03                                                                                     | 3W           | 9-36, 18-75                      | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | •                 | 1500<br>3000    | DIP-24  | •      | 61   |
| MIW06                                                                                      | 6W           | 9-18, 18-36, 36-75               | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | •                 | 1500<br>3000    | DIP-24  | •      | 62   |
| MIWI06                                                                                     | 6W           | 9-36, 18-75                      | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | •                 | 1500<br>3000    | DIP-24  | •      | 63   |
| MDWI06                                                                                     | 6W           | 9-36, 18-75                      | 3.3, 5, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | •                 | 1500            | DIP-16  | •      | 64   |
| MDW08                                                                                      | 8W           | 9-18, 18-36, 36-75               | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$           | •                 | 1500            | DIP-16  | •      | 65   |
| MDWI08                                                                                     | 8W           | 9-36, 18-75                      | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$           | •                 | 1500            | DIP-16  | •      | 66   |
| MDW10                                                                                      | 10W          | 9-18, 18-36, 36-75               | 3.3, 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$      | •                 | 1500            | DIP-16  | •      | 67   |
| MDWI10                                                                                     | 10W          | 9-36, 18-75                      | 3.3, 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$      | •                 | 1500            | DIP-16  | •      | 68   |
| MIW10                                                                                      | 10W          | 9-18, 18-36, 36-75               | 3.3, 5, 5.1, 12, 15, $\pm 12$ , $\pm 15$          | •                 | 1500            | DIP-24  | •      | 69   |
| MIWI10                                                                                     | 10W          | 9-36, 18-75                      | 3.3, 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$      | •                 | 1500            | DIP-24  | •      | 70   |
| MDW12                                                                                      | 12W          | 9-18, 18-36, 36-75               | 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$           | •                 | 1500            | DIP-16  | •      | 71   |
| MDWI12                                                                                     | 12W          | 9-36, 18-75                      | 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$           | •                 | 1500            | DIP-16  | •      | 72   |
|  MDW15  | 15W          | 9-18, 18-36, 36-75               | 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$              | •                 | 1500            | DIP-16  | •      | 73   |
|  MDWI15 | 15W          | 9-36, 18-75                      | 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$              | •                 | 1500            | DIP-16  | •      | 74   |
|  MDWI20 | 20W          | 4.5-18, 9-36, 18-75              | 5, 12, 15, 24, $\pm 12$ , $\pm 15$                | •                 | 1500            | DIP-16  | •      | 75   |

## 1" x1" Package DC-DC Converters, 10-40W

| Series                    | Output Power | Input Voltage Range (VDC) | Output Voltage (VDC)                                   | Output Regulation | Isolation (VDC) | Package | Safety | Page |
|---------------------------|--------------|---------------------------|--------------------------------------------------------|-------------------|-----------------|---------|--------|------|
| MJW10                     | 10W          | 9-18, 18-36, 36-75        | 3.3, 5, 5.1, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | •                 | 1500            | 1" x1"  | •      | 76   |
| MJWI10                    | 10W          | 9-36, 18-75               | 3.3, 5, 5.1, 12, 15, 24, $\pm 5$ , $\pm 12$ , $\pm 15$ | •                 | 1500            | 1" x1"  | •      | 77   |
| MJW15                     | 15W          | 9-18, 18-36, 36-75        | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$                | •                 | 1500            | 1" x1"  | •      | 78   |
| MJWI15                    | 15W          | 9-36, 18-75               | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$                | •                 | 1500            | 1" x1"  | •      | 79   |
| MJWI20                    | 20W          | 9-36, 18-75               | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$                | •                 | 1500            | 1" x1"  | •      | 80   |
| MJW25                     | 25W          | 9-18, 18-36, 36-75        | 3.3, 5, 12, 15, $\pm 12$ , $\pm 15$                    | •                 | 1500            | 1" x1"  | •      | 81   |
| MJWI25                    | 25W          | 9-36, 18-75               | 3.3, 5, 12, 15, $\pm 12$ , $\pm 15$                    | •                 | 1500            | 1" x1"  | •      | 82   |
| MJWI30                    | 30W          | 9-36, 18-75               | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$                | •                 | 1500            | 1" x1"  | •      | 83   |
| <small>NEW</small> MJWI40 | 40W          | 9-36, 18-75               | 5, 12, 15, 24, 48, 54, $\pm 12$ , $\pm 15$             | •                 | 1500            | 1"x1"   | •      | 84   |

## 2" x1" Package DC-DC Converters, 40-80W

|                           |     |                    |                                            |   |      |        |   |    |
|---------------------------|-----|--------------------|--------------------------------------------|---|------|--------|---|----|
| MKW40                     | 40W | 9-18, 18-36, 36-75 | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$    | • | 1500 | 2" x1" | • | 85 |
| MKWI40                    | 40W | 9-36, 18-75        | 3.3, 5, 12, 15, 24, $\pm 12$ , $\pm 15$    | • | 1500 | 2" x1" | • | 86 |
| MKW50                     | 50W | 9-18, 18-36, 36-75 | 3.3, 5, 12, 15, 24                         | • | 1500 | 2" x1" | • | 87 |
| MKWI50                    | 50W | 9-36, 18-75        | 3.3, 5, 12, 15, 24                         | • | 1500 | 2" x1" | • | 88 |
| <small>NEW</small> MKWI80 | 80W | 9-36, 18-75        | 5, 12, 15, 24, 48, 54, $\pm 12$ , $\pm 15$ | • | 1500 | 2"x1"  | • | 89 |

## Chassis &amp; Din-Rail Mounting Package DC-DC Converters, 6-60W

|         |     |             |                                                        |   |         |                     |   |    |
|---------|-----|-------------|--------------------------------------------------------|---|---------|---------------------|---|----|
| MJWI06C | 6W  | 9-36, 18-75 | 5, 5.1, 12, 15, 24, 48, $\pm 12$ , $\pm 15$ , $\pm 24$ | • | 3000VDC | Chassis<br>Din-Rail | • | 90 |
| MKW10C  | 10W | 9-36, 18-75 | 5, 5.1, 12, 15, 24, 48, $\pm 12$ , $\pm 15$ , $\pm 24$ | • | 3000VDC | Chassis<br>Din-Rail | • | 91 |
| MOWI20C | 20W | 9-36, 18-75 | 5.1, 12, 24, 48                                        | • | 2500VDC | Chassis<br>Din-Rail | • | 92 |
| MQWI40C | 40W | 9-36, 18-75 | 5.1, 12, 24, 48                                        | • | 2500VDC | Chassis<br>Din-Rail | • | 93 |
| MRWI60C | 60W | 9-36, 18-75 | 5.1, 12, 24, 48                                        | • | 2500VDC | Chassis<br>Din-Rail | • | 94 |

## Switching Regulators, 0.5-1A

|            |      |                          |                                       |   |   |       |   |    |
|------------|------|--------------------------|---------------------------------------|---|---|-------|---|----|
| M78AR-0.5  | 0.5A | [4.75/6.5/8/11/15/18]-32 | 1.5, 1.8, 2.5, 3.3, 5, 6.5, 9, 12, 15 | • | - | SIP-3 | • | 95 |
| M78SAR-0.5 | 0.5A | [4.75/6.5/8/11/15/18]-32 | 1.5, 1.8, 2.5, 3.3, 5, 6.5, 9, 12, 15 | • | - | SMD   | • | 96 |
| M78AR-1    | 1A   | [6.5/15]-32              | 3.3, 5, 12,                           | • | - | SIP-3 | • | 97 |

## GENERAL INDUSTRIAL POWER SOLUTIONS

## AC-DC Power Supplies, 3-60W

| Series | Output Power | Input Voltage Range (VDC) | Output Voltage (VDC)                            | Output Regulation | Isolation (VAC)     | Package              | Safety | Page |
|--------|--------------|---------------------------|-------------------------------------------------|-------------------|---------------------|----------------------|--------|------|
| AAF-03 | 3W           | 85 - 264VAC<br>120-370VDC | 3.3, 5, 9, 12, 15, 24                           | •                 | 3000 VAC Reinforced | PCB                  | •      | 98   |
| ABF-04 | 4W           | 85 - 264VAC<br>120-370VDC | 3.3, 5, 9, 12, 15, 24,<br>5/3.3, 12/5, ±12, ±15 | •                 | 3000 VAC Reinforced | PCB                  | •      | 99   |
| AAF-05 | 5W           | 85 - 264VAC<br>120-370VDC | 3.3, 5, 9, 12, 15, 24, 48                       | •                 | 3000 VAC Reinforced | PCB Chassis          | •      | 100  |
| AMF-07 | 7W           | 85 - 264VAC<br>90-370VDC  | 5, 12, 15, 24, 48                               | •                 | 3000 VAC Reinforced | PCB Chassis          | •      | 101  |
| ACF-10 | 10W          | 85 - 264VAC<br>120-370VDC | 3.3, 5, 12, 15, 24, 48                          | •                 | 4000 VAC Reinforced | PCB                  | •      | 102  |
| AMF-15 | 15W          | 85 - 264VAC<br>90-370VDC  | 5.1, 12, 15, 24, 48                             | •                 | 3000 VAC Reinforced | PCB Chassis DIN-Rail | •      | 103  |
| AGF-15 | 15W          | 85 - 264VAC<br>120-370VDC | 3.3, 5, 9, 12, 15, 24, 48                       | •                 | 3000 VAC Reinforced | PCB                  | •      | 104  |
| AMF-30 | 30W          | 85 - 264VAC<br>90-370VDC  | 5.1, 12, 15, 24, 48                             | •                 | 3000 VAC Reinforced | PCB Chassis DIN-Rail | •      | 105  |
| AMF-60 | 60W          | 85 - 264VAC<br>90-370VDC  | 5.1, 12, 15, 24, 48                             | •                 | 3000 VAC Reinforced | PCB Chassis DIN-Rail | •      | 106  |

## RAILWAY CERTIFIED POWER SOLUTIONS

## Railway Certified DC-DC Converters, 3-150W

| Series      | Output Power | Input Voltage Range (VDC) | Output Voltage (VDC)        | Output Regulation | Isolation          | Package       | Safety | Page |
|-------------|--------------|---------------------------|-----------------------------|-------------------|--------------------|---------------|--------|------|
| MIZI03      | 3W           | 9-36, 18-75<br>40-160     | 5, 12, 15, ±12, ±15         | •                 | 3000VAC Reinforced | DIP           | •      | 110  |
| MKZI10      | 10W          | 9-36, 18-75<br>40-160     | 5, 12, 15, 24, ±12, ±15     | •                 | 3000VAC Reinforced | 2" x 1"       | •      | 111  |
| MKZI20      | 20W          | 9-36, 18-75<br>40-160     | 5, 12, 15, 24, ±12, ±15     | •                 | 3000VAC Reinforced | 2" x 1"       | •      | 112  |
| MKZI40      | 40W          | 36-160                    | 5, 12, 15, 24, 54, ±12, ±15 | •                 | 3000VAC Reinforced | 2" x 1"       | •      | 113  |
| MTQZ50      | 50W          | 43-101<br>66-160          | 5, 12, 15, 24               | •                 | 3000VAC Reinforced | Quarter Brick | •      | 114  |
| NEW MRZI75  | 75W          | 36-160                    | 5, 12, 15, 24, 54           | •                 | 2000VAC Reinforced | Quarter Brick | •      | 115  |
| MRZI100     | 100W         | 36-160                    | 5, 12, 15, 24, 54           | •                 | 2000VAC Reinforced | Quarter Brick | •      | 116  |
| MRZI150     | 150W         | 36-160                    | 5, 12, 15, 24, 54           | •                 | 2000VAC Reinforced | Quarter Brick | •      | 117  |
| NEW MRHI150 | 150W         | 9-36                      | 5, 12, 15, 24, 54           | •                 | 1680VAC Reinforced | Half Brick    | •      | 118  |

## Ultra-high Isolation DC-DC Converters, 1-60W

| Series     | Output Power | Input Voltage Range (VDC)                | Output Voltage (VDC)                                                     | Output Regulation | Isolation          | Package          | Safety | Page |
|------------|--------------|------------------------------------------|--------------------------------------------------------------------------|-------------------|--------------------|------------------|--------|------|
| MA01-HI    | 1W           | 4.5-5.5, 10.8-13.2, 13.5-16.5, 21.6-26.4 | 3.3, 5, 9, 12, 15, $\pm 5$ , $\pm 9$ , $\pm 12$ , $\pm 15$ , $\pm 15/-9$ | -                 | 5200VDC            | SIP              | •      | 122  |
| MAEU01-HI  | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 5, 12, 15                                                                | -                 | 3000VAC Reinforced | SIP              | •      | 124  |
| MAEU02-HI  | 2W           | 4.5-5.5, 10.8-13.2, 13.5-16.5, 21.6-26.4 | 3.3, 5, 9, 12, 15, $\pm 5$ , $\pm 9$ , $\pm 12$ , $\pm 15$ , $\pm 15/-9$ | -                 | 5200VDC            | SIP              | •      | 126  |
| MSCEU01-HI | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 5, 12, 15, $\pm 12$ , $\pm 15$                                           | -                 | 3000VAC Reinforced | SMD              | •      | 128  |
| MDEU02-HI  | 2W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 5, 12, 15, $\pm 12$ , $\pm 15$                                           | -                 | 4000VAC Reinforced | DIP              | •      | 129  |
| MIR500     | 2W           | 4.5-5.5, 10.8-13.2, 21.6-26.4            | 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$                                 | •                 | 6000VDC            | DIP              | •      | 130  |
| MIE03-HI   | 3.5W         | 4.5-9, 9-18, 18-36, 36-75                | 5, 5.8, 12, 15, 24, $\pm 12$ , $\pm 15$                                  | •                 | 5000VAC Reinforced | DIP              | •      | 131  |
| MIEI03-HI  | 3W           | 9-40, 18-80                              | 5, 12, $\pm 12$ , $\pm 15$                                               | •                 | 8000VDC Reinforced | DIP              | •      | 132  |
| MIE06-HI   | 6W           | 9-18, 18-36, 36-75                       | 5, 12, 15, 24, $\pm 12$ , $\pm 15$                                       | •                 | 5000VAC Reinforced | DIP              | •      | 133  |
| MIE10-HI   | 10W          | 9-18, 18-36, 36-75                       | 3.3, 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$                             | •                 | 5000VAC Reinforced | DIP              | •      | 134  |
| MKE15-HI   | 15W          | 9-18, 18-36, 36-75                       | 5, 5.1, 12, 15, 24 $\pm 12$ , $\pm 15$                                   | •                 | 4200VAC Reinforced | 2" x 1"          | •      | 135  |
| MKE20-HI   | 20W          | 9-18, 18-36, 36-75                       | 5, 5.1, 12, 15, 24 $\pm 12$ , $\pm 15$                                   | •                 | 4200VAC Reinforced | 2" x 1"          | •      | 136  |
| MJA06C     | 6W           | 80-160                                   | 5, 5.1, 12, 15, 24, 48, $\pm 12$ , $\pm 15$ , $\pm 24$                   | •                 | 3000VAC Reinforced | Chassis Din-Rail | •      | 137  |
| MKA10C     | 10W          | 80-160                                   | 5, 5.1, 12, 15, 24, 48, $\pm 12$ , $\pm 15$ , $\pm 24$                   | •                 | 3000VAC Reinforced | Chassis Din-Rail | •      | 138  |
| MOA20C     | 20W          | 80-160                                   | 5, 5.1, 12, 15, 24, 48, $\pm 12$ , $\pm 15$ , $\pm 24$                   | •                 | 3000VAC Reinforced | Chassis Din-Rail | •      | 139  |
| MQA40C     | 40W          | 80-160                                   | 5, 5.1, 12, 15, 24, 48, $\pm 12$ , $\pm 15$ , $\pm 24$                   | •                 | 3000VAC Reinforced | Chassis Din-Rail | •      | 140  |
| MRA60C     | 60W          | 80-160                                   | 5, 5.1, 12, 15, 24, 48, $\pm 12$ , $\pm 15$ , $\pm 24$                   | •                 | 3000VAC Reinforced | Chassis Din-Rail | •      | 141  |

## Medicial Safety DC-DC Converters, 1-20W

| Series   | Output Power | Input Voltage Range (VDC)     | Output Voltage (VDC)                         | Output Regulation | Isolation (VAC)    | Package | Safety | Page |
|----------|--------------|-------------------------------|----------------------------------------------|-------------------|--------------------|---------|--------|------|
| MAU400   | 1W           | 4.5-5.5, 10.8-13.2            | 5, 12, 15, $\pm 5$ , $\pm 12$ , $\pm 15$     | -                 | 3000VAC Reinforced | SIP     | •      | 144  |
| MAU01M   | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4 | 5, 12, 15                                    | -                 | 4000VAC Reinforced | SIP     | •      | 145  |
| MSCU01M  | 1W           | 4.5-5.5, 10.8-13.2, 21.6-26.4 | 5, 12, 15, $\pm 12$ , $\pm 15$               | -                 | 4000VAC Reinforced | SMD     | •      | 146  |
| MSHU100  | 2W           | 4.5-5.5, 10.8-13.2, 21.6-26.4 | 5, 12, 15, $\pm 12$ , $\pm 15$               | -                 | 4000VAC Reinforced | SMD     | •      | 147  |
| MDHU100  | 2W           | 4.5-5.5, 10.8-13.2, 21.6-26.4 | 5, 12, 15, $\pm 12$ , $\pm 15$               | -                 | 4000VAC Reinforced | DIP     | •      | 148  |
| MIHW2000 | 3W           | 9-40, 18-80, 36-160           | 5, 12, 15, $\pm 12$ , $\pm 15$               | •                 | 4000VAC Reinforced | DIP     | •      | 149  |
| MIW03M   | 3.5W         | 4.5-9, 9-18, 18-36, 36-75     | 5, 5.8, 12, 15, $\pm 12$ , $\pm 15$          | •                 | 5000VAC Reinforced | DIP     | •      | 150  |
| MIW06M   | 6W           | 9-18, 18-36, 36-75            | 5, 12, 15, $\pm 12$ , $\pm 15$               | •                 | 5000VAC Reinforced | DIP     | •      | 151  |
| MIW10M   | 10W          | 9-18, 18-36, 36-75            | 3.3, 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$ | •                 | 5000VAC Reinforced | DIP     | •      | 152  |
| MKW15M   | 15W          | 9-18, 18-36, 36-75            | 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$      | •                 | 4200VAC Reinforced | 2" x 1" | •      | 153  |
| MKW20M   | 20W          | 9-18, 18-36, 36-75            | 5, 5.1, 12, 15, 24, $\pm 12$ , $\pm 15$      | •                 | 4200VAC Reinforced | 2" x 1" | •      | 154  |

## Medicial Safety AC-DC Power Supplies, 24-60W

| Series | Output Power | Input Voltage Range (VAC) | Output Voltage (VDC)                  | Output Regulation | Isolation (VAC)    | Package              | Safety | Page |
|--------|--------------|---------------------------|---------------------------------------|-------------------|--------------------|----------------------|--------|------|
| AJM-24 | 24W          | 85-264                    | 5, 9, 12, 15, 24, $\pm 12$ , $\pm 15$ | •                 | 4000VAC Reinforced | PCB Chassis DIN-Rail | •      | 155  |
| APM-40 | 40W          | 85-264                    | 5, 12, 15, 24, $\pm 12$ , $\pm 15$    | •                 | 4000VAC Reinforced | PCB Chassis DIN-Rail | •      | 156  |
| AYM-60 | 60W          | 85-264                    | 5.1, 12, 15, 24, 48                   | •                 | 4000VAC Reinforced | PCB Chassis DIN-Rail | •      | 157  |



POWER FOR  
A BETTER FUTURE


# GENERAL INDUSTRIAL POWER SOLUTIONS



Power Density  
**4 x UP**

**75%**  
Board Space

**79%**  
Weight

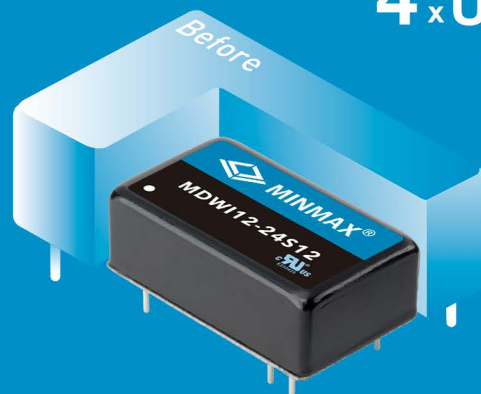


# MBU100 Series | 1W



- Industrial Standard SIP-4 Package
- Unregulated Output Voltage
- I/O Isolation 1000 VDC
- Wide Operating Temperature Range

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MBU135       | 3.3                 | 3.3                  | 260                 | 74%        |
| MBU131       | (2.97 - 3.63)       | 5                    | 200                 | 77%        |
| MBU105       | 5<br>(4.5 - 5.5)    | 3.3                  | 260                 | 72%        |
| MBU101       |                     | 5                    | 200                 | 69%        |
| MBU102       |                     | 9                    | 110                 | 76%        |
| MBU103       |                     | 12                   | 84                  | 77%        |
| MBU104       |                     | 15                   | 67                  | 78%        |
| MBU111       | 12<br>(10.8 - 13.2) | 5                    | 200                 | 71%        |
| MBU112       |                     | 9                    | 110                 | 77%        |
| MBU113       |                     | 12                   | 84                  | 79%        |
| MBU114       |                     | 15                   | 67                  | 80%        |
| MBU121       | 24<br>(21.6 - 26.4) | 5                    | 200                 | 70%        |
| MBU122       |                     | 9                    | 110                 | 76%        |
| MBU123       |                     | 12                   | 84                  | 79%        |
| MBU124       |                     | 15                   | 67                  | 79%        |

## Mechanical Dimensions

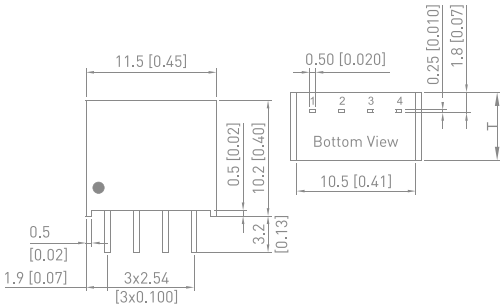

## Pin Connections

| Pin | Function |
|-----|----------|
| 1   | -Vin     |
| 2   | +Vin     |
| 3   | -Vout    |
| 4   | +Vout    |

T: 6.1[0.24] for 3.3V & 5V & 12V Input Models  
T: 7.1[0.28]for 24V Input Models


# MAU100 Series | 1W



- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- I/O Isolation 1000 VDC
- Wide Operating Temperature Range
- UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MAU101       | 5<br>(4.5 - 5.5)    | 3.3                  | 260                 | 73%        |
| MAU102       |                     | 5                    | 200                 | 71%        |
| MAU103       |                     | 9                    | 110                 | 76%        |
| MAU104       |                     | 12                   | 84                  | 78%        |
| MAU105       |                     | 15                   | 67                  | 78%        |
| MAU106       |                     | ±5                   | ±100                | 72%        |
| MAU107       |                     | ±9                   | ±56                 | 77%        |
| MAU108       |                     | ±12                  | ±42                 | 78%        |
| MAU109       |                     | ±15                  | ±34                 | 79%        |
| MAU111       | 12<br>(10.8 - 13.2) | 3.3                  | 260                 | 74%        |
| MAU112       |                     | 5                    | 200                 | 73%        |
| MAU113       |                     | 9                    | 110                 | 78%        |
| MAU114       |                     | 12                   | 84                  | 80%        |
| MAU115       |                     | 15                   | 67                  | 80%        |
| MAU116       |                     | ±5                   | ±100                | 74%        |
| MAU117       |                     | ±9                   | ±56                 | 79%        |
| MAU118       |                     | ±12                  | ±42                 | 81%        |
| MAU119       |                     | ±15                  | ±34                 | 81%        |
| MAU151       | 15<br>(13.5 - 16.5) | 5                    | 200                 | 72%        |
| MAU152       |                     | 12                   | 84                  | 79%        |
| MAU153       |                     | 15                   | 67                  | 79%        |
| MAU154       |                     | ±5                   | ±100                | 72%        |
| MAU155       |                     | ±12                  | ±42                 | 80%        |
| MAU156       |                     | ±15                  | ±34                 | 80%        |
| MAU121       | 24<br>(21.6 - 26.4) | 3.3                  | 260                 | 73%        |
| MAU122       |                     | 5                    | 200                 | 71%        |
| MAU123       |                     | 9                    | 110                 | 76%        |
| MAU124       |                     | 12                   | 84                  | 78%        |
| MAU125       |                     | 15                   | 67                  | 79%        |
| MAU126       |                     | ±5                   | ±100                | 72%        |
| MAU127       |                     | ±9                   | ±56                 | 76%        |
| MAU128       |                     | ±12                  | ±42                 | 79%        |
| MAU129       |                     | ±15                  | ±34                 | 80%        |

## Mechanical Dimensions

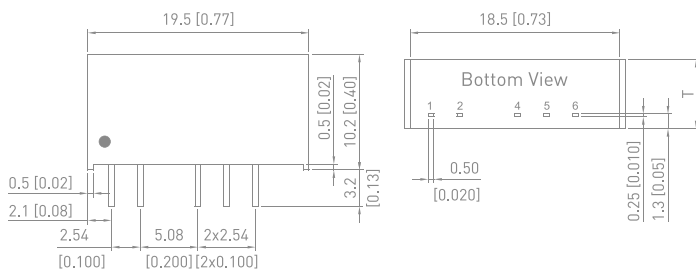

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 4   | -Vout  | -Vout  |
| 5   | No Pin | Common |
| 6   | +Vout  | +Vout  |

T: 6.1[0.24] for 5V & 12V Input Models  
T: 7.1[0.28] for 24V Input Models


MA01 Series | 1W



- Industrial Standard SIP-7 Package
- Semi-regulated Output Voltage
- Very High Efficiency up to 88.5%
- I/O Isolation 1000 VDC
- Wide Operating Temperature Range
- UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MA01-05S05   | 5<br>(4.5 ~ 5.5)    | 5                    | 200                 | 84%        |
| MA01-05S09   |                     | 9                    | 110                 | 87%        |
| MA01-05S12   |                     | 12                   | 84                  | 87%        |
| MA01-05S15   |                     | 15                   | 67                  | 87.5%      |
| MA01-05D05   |                     | ±5                   | ±100                | 84.5%      |
| MA01-05D09   |                     | ±9                   | ±56                 | 86%        |
| MA01-05D12   |                     | ±12                  | ±42                 | 86.5%      |
| MA01-05D15   |                     | ±15                  | ±34                 | 86.5%      |
| MA01-12S05   | 12<br>(10.8 ~ 13.2) | 5                    | 200                 | 84%        |
| MA01-12S09   |                     | 9                    | 110                 | 86.5%      |
| MA01-12S12   |                     | 12                   | 84                  | 86.5%      |
| MA01-12S15   |                     | 15                   | 67                  | 88%        |
| MA01-12D05   |                     | ±5                   | ±100                | 84.5%      |
| MA01-12D09   |                     | ±9                   | ±56                 | 86%        |
| MA01-12D12   |                     | ±12                  | ±42                 | 88.6%      |
| MA01-12D15   |                     | ±15                  | ±34                 | 87.5%      |
| MA01-24S05   | 24<br>(21.6 ~ 26.4) | 5                    | 200                 | 84%        |
| MA01-24S09   |                     | 9                    | 110                 | 86.5%      |
| MA01-24S12   |                     | 12                   | 84                  | 87.5%      |
| MA01-24S15   |                     | 15                   | 67                  | 87.5%      |
| MA01-24D05   |                     | ±5                   | ±100                | 83.5%      |
| MA01-24D09   |                     | ±9                   | ±56                 | 86%        |
| MA01-24D12   |                     | ±12                  | ±42                 | 87%        |
| MA01-24D15   |                     | ±15                  | ±34                 | 87%        |

Mechanical Dimensions

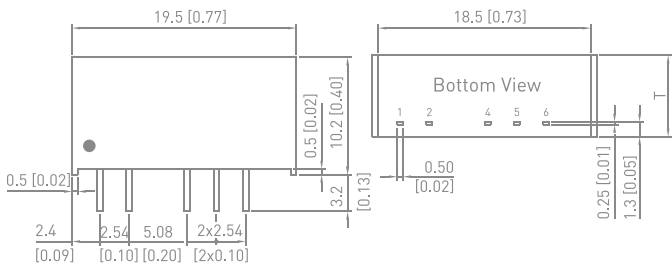

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 4   | -Vout  | -Vout  |
| 5   | No Pin | Common |
| 6   | +Vout  | +Vout  |

T: 6.1[0.24] for 5V & 12V Input Models  
T: 7.1[0.28]for 24V Input Models


# MA01H Series | 1W



- Industrial Standard SIP-7 Package
- Semi-regulated Output Voltage
- Very High Efficiency up to 88%
- I/O Isolation 3000VDC
- Wide Operating Temperature Range
- UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MA01-05S05H  | 5<br>(4.5 ~ 5.5)    | 5                    | 200                 | 84%        |
| MA01-05S09H  |                     | 9                    | 110                 | 86.5%      |
| MA01-05S12H  |                     | 12                   | 84                  | 87%        |
| MA01-05S15H  |                     | 15                   | 67                  | 87.5%      |
| MA01-12S05H  | 12<br>(10.8 ~ 13.2) | 5                    | 200                 | 84%        |
| MA01-12S09H  |                     | 9                    | 110                 | 86%        |
| MA01-12S12H  |                     | 12                   | 84                  | 88%        |
| MA01-12S15H  |                     | 15                   | 67                  | 88%        |
| MA01-24S05H  | 24<br>(21.6 ~ 26.4) | 5                    | 200                 | 84%        |
| MA01-24S09H  |                     | 9                    | 110                 | 86.5%      |
| MA01-24S12H  |                     | 12                   | 84                  | 87.5%      |
| MA01-24S15H  |                     | 15                   | 67                  | 87.5%      |

## Mechanical Dimensions

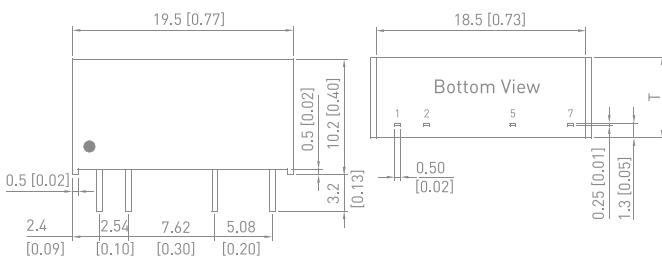

## Pin Connections

| Pin | Function |
|-----|----------|
| 1   | +Vin     |
| 2   | -Vin     |
| 5   | -Vout    |
| 7   | +Vout    |

T: 6.1[0.24] for 5V & 12V Input Models  
T: 7.1[0.28] for 24V Input Models


MAU200 Series | 1W



- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- I/O Isolation 3000 VDC
- Wide Operating Temperature Range
- UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MAU201       | 5<br>(4.5 - 5.5)    | 3.3                  | 260                 | 73%        |
| MAU202       |                     | 5                    | 200                 | 71%        |
| MAU203       |                     | 9                    | 110                 | 76%        |
| MAU204       |                     | 12                   | 84                  | 78%        |
| MAU205       |                     | 15                   | 67                  | 78%        |
| MAU206       |                     | ±5                   | ±100                | 72%        |
| MAU207       |                     | ±9                   | ±56                 | 77%        |
| MAU208       |                     | ±12                  | ±42                 | 78%        |
| MAU209       |                     | ±15                  | ±34                 | 79%        |
| MAU211       | 12<br>(10.8 - 13.2) | 3.3                  | 260                 | 74%        |
| MAU212       |                     | 5                    | 200                 | 73%        |
| MAU213       |                     | 9                    | 110                 | 78%        |
| MAU214       |                     | 12                   | 84                  | 80%        |
| MAU215       |                     | 15                   | 67                  | 80%        |
| MAU216       |                     | ±5                   | ±100                | 74%        |
| MAU217       |                     | ±9                   | ±56                 | 79%        |
| MAU218       |                     | ±12                  | ±42                 | 81%        |
| MAU219       |                     | ±15                  | ±34                 | 81%        |
| MAU221       | 15<br>(13.5 - 16.5) | 3.3                  | 260                 | 73%        |
| MAU222       |                     | 5                    | 200                 | 71%        |
| MAU223       |                     | 9                    | 110                 | 76%        |
| MAU224       |                     | 12                   | 84                  | 78%        |
| MAU225       |                     | 15                   | 67                  | 79%        |
| MAU226       |                     | ±5                   | ±100                | 72%        |
| MAU227       |                     | ±9                   | ±56                 | 76%        |
| MAU228       |                     | ±12                  | ±42                 | 79%        |
| MAU229       |                     | ±15                  | ±34                 | 80%        |

Mechanical Dimensions

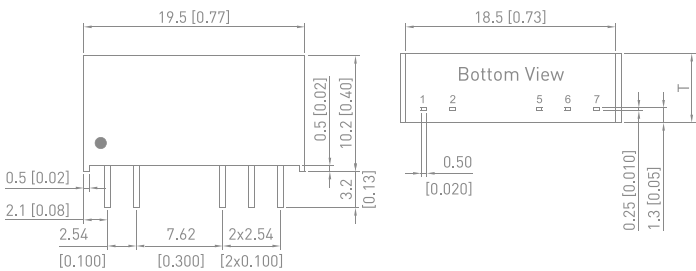


Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 5   | -Vout  | -Vout  |
| 6   | No Pin | Common |
| 7   | +Vout  | +Vout  |

T: 6.1[0.24] for 5V & 12V Input Models  
T: 7.1[0.28]for 24V Input Models


# MAPU01H Series | 1W



- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- I/O Isolation 3000VDC
- Wide Operating Temperature Range
- Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number    | Input Voltage (VDC)  | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|-----------------|----------------------|----------------------|---------------------|------------|
| MAPU01-033S033H | 3.3<br>(2.97 - 3.63) | 3.3                  | 300                 | 77%        |
| MAPU01-033S05H  |                      | 5                    | 200                 | 77%        |
| MAPU01-033S09H  |                      | 9                    | 110                 | 78%        |
| MAPU01-033S12H  |                      | 12                   | 84                  | 80%        |
| MAPU01-033S15H  |                      | 15                   | 68                  | 79%        |
| MAPU01-033D05H  |                      | ±5                   | ±100                | 77%        |
| MAPU01-033D12H  |                      | ±12                  | ±42                 | 79%        |
| MAPU01-033D15H  |                      | ±15                  | ±34                 | 79%        |
| MAPU01-05S033H  | 5<br>(4.5 - 5.5)     | 3.3                  | 300                 | 76%        |
| MAPU01-05S05H   |                      | 5                    | 200                 | 78%        |
| MAPU01-05S09H   |                      | 9                    | 110                 | 81%        |
| MAPU01-05S12H   |                      | 12                   | 84                  | 82%        |
| MAPU01-05S15H   |                      | 15                   | 68                  | 83%        |
| MAPU01-05D05H   |                      | ±5                   | ±100                | 81%        |
| MAPU01-05D12H   |                      | ±12                  | ±42                 | 81%        |
| MAPU01-05D15H   |                      | ±15                  | ±34                 | 81%        |
| MAPU01-12S033H  | 12<br>(10.8 - 13.2)  | 3.3                  | 300                 | 79%        |
| MAPU01-12S05H   |                      | 5                    | 200                 | 80%        |
| MAPU01-12S09H   |                      | 9                    | 110                 | 82%        |
| MAPU01-12S12H   |                      | 12                   | 84                  | 84%        |
| MAPU01-12S15H   |                      | 15                   | 68                  | 83%        |
| MAPU01-12D05H   |                      | ±5                   | ±100                | 81%        |
| MAPU01-12D12H   |                      | ±12                  | ±42                 | 82%        |
| MAPU01-12D15H   |                      | ±15                  | ±34                 | 82%        |
| MAPU01-24S033H  | 24<br>(21.6 - 26.4)  | 3.3                  | 300                 | 76%        |
| MAPU01-24S05H   |                      | 5                    | 200                 | 81%        |
| MAPU01-24S09H   |                      | 9                    | 110                 | 79%        |
| MAPU01-24S12H   |                      | 12                   | 84                  | 82%        |
| MAPU01-24S15H   |                      | 15                   | 68                  | 82%        |
| MAPU01-24D05H   |                      | ±5                   | ±100                | 80%        |
| MAPU01-24D12H   |                      | ±12                  | ±42                 | 81%        |
| MAPU01-24D15H   |                      | ±15                  | ±34                 | 80%        |

## Mechanical Dimensions

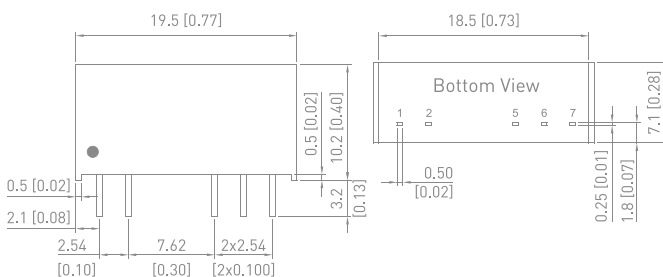

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 5   | -Vout  | -Vout  |
| 6   | No Pin | Common |
| 7   | +Vout  | +Vout  |

To order the converter for another type pin, please refer to the datasheet.


MAW01 Series | 1W



- Industrial Standard SIP-6 Package
- Wide 2 : 1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload and Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MAW01-05S05  | 5<br>(4.5 ~ 9)      | 5                    | 200                 | 76%        |
| MAW01-05S12  |                     | 12                   | 83                  | 77%        |
| MAW01-05S15  |                     | 15                   | 67                  | 79%        |
| MAW01-05S24  |                     | 24                   | 42                  | 76%        |
| MAW01-05D12  |                     | ±12                  | ±42                 | 77%        |
| MAW01-05D15  |                     | ±15                  | ±33                 | 78%        |
| MAW01-12S05  | 12<br>(9 ~ 18)      | 5                    | 200                 | 77%        |
| MAW01-12S12  |                     | 12                   | 83                  | 77%        |
| MAW01-12S15  |                     | 15                   | 67                  | 80%        |
| MAW01-12S24  |                     | 24                   | 42                  | 77%        |
| MAW01-12D12  |                     | ±12                  | ±42                 | 79%        |
| MAW01-12D15  |                     | ±15                  | ±33                 | 78%        |
| MAW01-24S05  | 24<br>(18 ~ 36)     | 5                    | 200                 | 77%        |
| MAW01-24S12  |                     | 12                   | 83                  | 80%        |
| MAW01-24S15  |                     | 15                   | 67                  | 80%        |
| MAW01-24S24  |                     | 24                   | 42                  | 77%        |
| MAW01-24D12  |                     | ±12                  | ±42                 | 80%        |
| MAW01-24D15  |                     | ±15                  | ±33                 | 80%        |
| MAW01-48S05  | 48<br>(36 ~ 75)     | 5                    | 200                 | 77%        |
| MAW01-48S12  |                     | 12                   | 83                  | 78%        |
| MAW01-48S15  |                     | 15                   | 67                  | 78%        |
| MAW01-48S24  |                     | 24                   | 42                  | 76%        |
| MAW01-48D12  |                     | ±12                  | ±42                 | 79%        |
| MAW01-48D15  |                     | ±15                  | ±33                 | 79%        |

Mechanical Dimensions

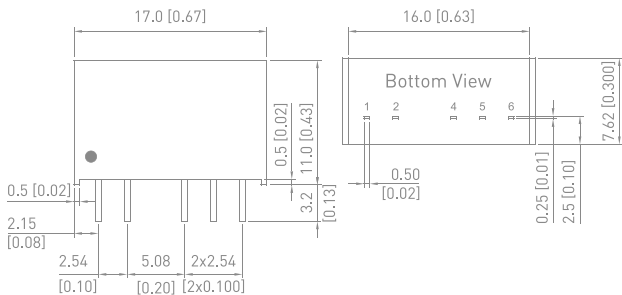

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 4   | +Vout  | +Vout  |
| 5   | No Pin | Common |
| 6   | -Vout  | -Vout  |


# MAU300 Series 2W



- Industrial Standard SIP-7 Package
- I/O Isolation 1000 VDC
- Wide Operating Temperature Range

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MAU301       | 5<br>(4.5 ~ 5.5)    | 3.3                  | 500                 | 73%        |
| MAU303       |                     | 5                    | 400                 | 76%        |
| MAU303       |                     | 12                   | 165                 | 80%        |
| MAU304       |                     | 15                   | 133                 | 80%        |
| MAU305       |                     | ±5                   | ±200                | 77%        |
| MAU306       |                     | ±12                  | ±83                 | 79%        |
| MAU307       |                     | ±15                  | ±66                 | 79%        |
| MAU311       | 12<br>(10.8 ~ 13.2) | 3.3                  | 500                 | 74%        |
| MAU312       |                     | 5                    | 400                 | 78%        |
| MAU313       |                     | 12                   | 165                 | 82%        |
| MAU314       |                     | 15                   | 133                 | 83%        |
| MAU315       |                     | ±5                   | ±200                | 79%        |
| MAU316       |                     | ±12                  | ±83                 | 82%        |
| MAU317       |                     | ±15                  | ±66                 | 82%        |
| MAU321       | 24<br>(21.6 ~ 26.4) | 3.3                  | 500                 | 74%        |
| MAU322       |                     | 5                    | 400                 | 77%        |
| MAU323       |                     | 12                   | 165                 | 81%        |
| MAU324       |                     | 15                   | 133                 | 82%        |
| MAU325       |                     | ±5                   | ±200                | 79%        |
| MAU326       |                     | ±12                  | ±83                 | 81%        |
| MAU327       |                     | ±15                  | ±66                 | 82%        |

## Mechanical Dimensions

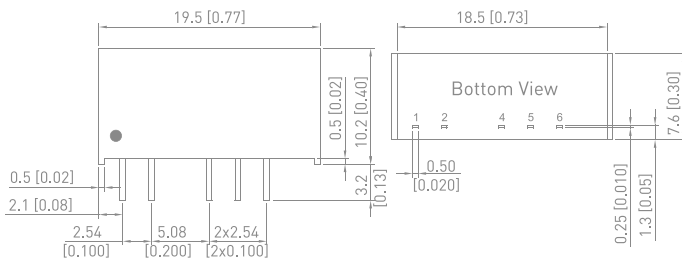

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 4   | -Vout  | -Vout  |
| 5   | No Pin | Common |
| 6   | +Vout  | +Vout  |


MAPU02H Series | 2W



- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- I/O Isolation 3000VDC
- Wide Operating Temperature Range
- Short Circuit Protection

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MAPU02-05S033H | 5<br>(4.5 - 5.5)    | 3.3                  | 500                 | 74%        |
| MAPU02-05S05H  |                     | 5                    | 400                 | 78%        |
| MAPU02-05S09H  |                     | 9                    | 222                 | 79%        |
| MAPU02-05S12H  |                     | 12                   | 168                 | 81%        |
| MAPU02-05S15H  |                     | 15                   | 132                 | 80%        |
| MAPU02-05D05H  |                     | ±5                   | ±200                | 77%        |
| MAPU02-05D12H  |                     | ±12                  | ±84                 | 79%        |
| MAPU02-05D15H  |                     | ±15                  | ±66                 | 78%        |
| MAPU02-12S033H | 12<br>(10.8 - 13.2) | 3.3                  | 500                 | 76%        |
| MAPU02-12S05H  |                     | 5                    | 400                 | 78%        |
| MAPU02-12S09H  |                     | 9                    | 222                 | 80%        |
| MAPU02-12S12H  |                     | 12                   | 168                 | 82%        |
| MAPU02-12S15H  |                     | 15                   | 132                 | 81%        |
| MAPU02-12D05H  |                     | ±5                   | ±200                | 78%        |
| MAPU02-12D12H  |                     | ±12                  | ±84                 | 81%        |
| MAPU02-12D15H  |                     | ±15                  | ±66                 | 81%        |
| MAPU02-24S033H | 24<br>(21.6 - 26.4) | 3.3                  | 500                 | 76%        |
| MAPU02-24S05H  |                     | 5                    | 400                 | 78%        |
| MAPU02-24S09H  |                     | 9                    | 222                 | 79%        |
| MAPU02-24S12H  |                     | 12                   | 168                 | 81%        |
| MAPU02-24S15H  |                     | 15                   | 132                 | 79%        |
| MAPU02-24D05H  |                     | ±5                   | ±200                | 76%        |
| MAPU02-24D12H  |                     | ±12                  | ±84                 | 80%        |
| MAPU02-24D15H  |                     | ±15                  | ±66                 | 79%        |

Mechanical Dimensions

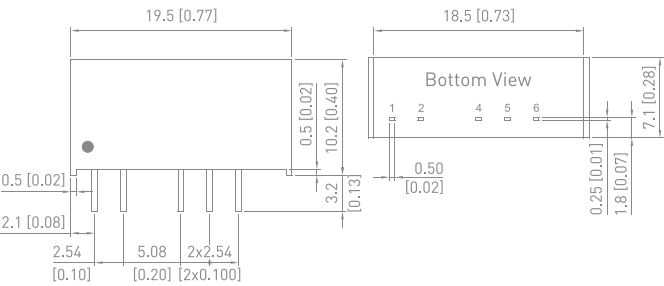

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 4   | -Vout  | -Vout  |
| 5   | No Pin | Common |
| 6   | +Vout  | +Vout  |


# MCW1000 Series | 2W



- Industry Standard SIP-8 Package
- Wide 2 : 1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1000 VDC
- Wide Operating Temperature Range
- Under-Voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MCW1011      | 5<br>(4.5 - 9)      | 3.3                  | 500                 | 70%        |
| MCW1012      |                     | 5                    | 400                 | 73%        |
| MCW1013      |                     | 12                   | 167                 | 75%        |
| MCW1021      | 12<br>(9 - 18)      | 3.3                  | 500                 | 73%        |
| MCW1022      |                     | 5                    | 400                 | 77%        |
| MCW1023      |                     | 12                   | 167                 | 80%        |
| MCW1031      | 24<br>(18 - 36)     | 3.3                  | 500                 | 72%        |
| MCW1032      |                     | 5                    | 400                 | 77%        |
| MCW1033      |                     | 12                   | 167                 | 81%        |
| MCW1041      | 48<br>(36 - 75)     | 3.3                  | 500                 | 71%        |
| MCW1042      |                     | 5                    | 400                 | 73%        |
| MCW1043      |                     | 12                   | 167                 | 79%        |

## Mechanical Dimensions

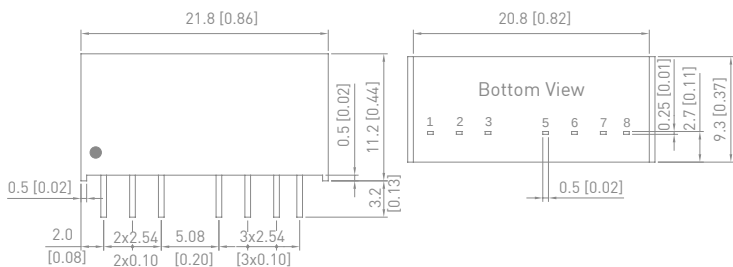

## Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | -Vin          |
| 2   | +Vin          |
| 3   | Remote On/Off |
| 5   | NC            |
| 6   | +Vout         |
| 7   | -Vout         |
| 8   | NC            |

NC= No Connection


MCWI02 Series | 2W



- Industrial Standard SIP-8 Package
- Ultra-wide 4 : 1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MCWI02-12S033 | 12<br>(4.5 - 18)    | 3.3                  | 500                 | 75%        |
| MCWI02-12S05  |                     | 5                    | 400                 | 80%        |
| MCWI02-12S12  |                     | 12                   | 167                 | 82%        |
| MCWI02-12S15  |                     | 15                   | 134                 | 82%        |
| MCWI02-12D05  |                     | ±5                   | ±200                | 80%        |
| MCWI02-12D12  |                     | ±12                  | ±83                 | 82%        |
| MCWI02-12D15  |                     | ±15                  | ±67                 | 82%        |
| MCWI02-24S033 | 24<br>(9 - 36)      | 3.3                  | 500                 | 75%        |
| MCWI02-24S05  |                     | 5                    | 400                 | 80%        |
| MCWI02-24S12  |                     | 12                   | 167                 | 82%        |
| MCWI02-24S15  |                     | 15                   | 134                 | 82%        |
| MCWI02-24D05  |                     | ±5                   | ±200                | 80%        |
| MCWI02-24D12  |                     | ±12                  | ±83                 | 82%        |
| MCWI02-24D15  |                     | ±15                  | ±67                 | 82%        |
| MCWI02-48S033 | 48<br>(18 - 75)     | 3.3                  | 500                 | 74%        |
| MCWI02-48S05  |                     | 5                    | 400                 | 80%        |
| MCWI02-48S12  |                     | 12                   | 167                 | 82%        |
| MCWI02-48S15  |                     | 15                   | 134                 | 82%        |
| MCWI02-48D05  |                     | ±5                   | ±200                | 80%        |
| MCWI02-48D12  |                     | ±12                  | ±83                 | 82%        |
| MCWI02-48D15  |                     | ±15                  | ±67                 | 82%        |

Mechanical Dimensions

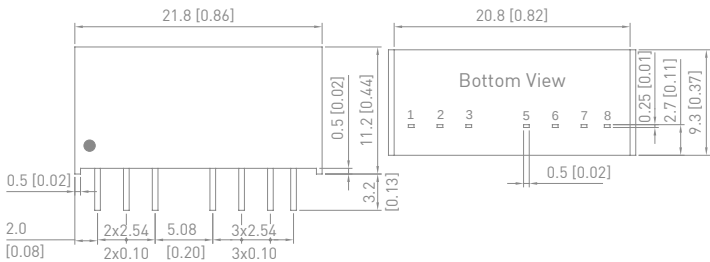

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 5   | NC            | NC            |
| 6   | +Vout         | +Vout         |
| 7   | -Vout         | Common        |
| 8   | NC            | -Vout         |

NC= No Connection


# MEW1000 Series 2W



- High Power Density in SIP-9 Package
- Small Footprint: 26 x 9.2 mm (1.02"x 0.36")
- Ultra-wide 4:1 Input Range
- Fully Regulated Output
- Wide Operating Temperature Range
- Under-Voltage, Overload and Short Circuit Protection
- I/O-Isolation Voltage 1500 VDC
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MEW1021      | 24<br>(9 ~ 36)      | 3.3                  | 500                 | 71%        |
| MEW1022      |                     | 5                    | 400                 | 76%        |
| MEW1023      |                     | 12                   | 165                 | 79%        |
| MEW1024      |                     | 15                   | 133                 | 80%        |
| MEW1025      |                     | ±5                   | ±200                | 73%        |
| MEW1026      |                     | ±12                  | ±83                 | 77%        |
| MEW1027      |                     | ±15                  | ±67                 | 79%        |
| MEW1031      | 48<br>(18 ~ 75)     | 3.3                  | 500                 | 70%        |
| MEW1032      |                     | 5                    | 400                 | 72%        |
| MEW1033      |                     | 12                   | 165                 | 78%        |
| MEW1034      |                     | 15                   | 133                 | 78%        |
| MEW1035      |                     | ±5                   | ±200                | 70%        |
| MEW1036      |                     | ±12                  | ±83                 | 76%        |
| MEW1037      |                     | ±15                  | ±67                 | 76%        |

## Mechanical Dimensions

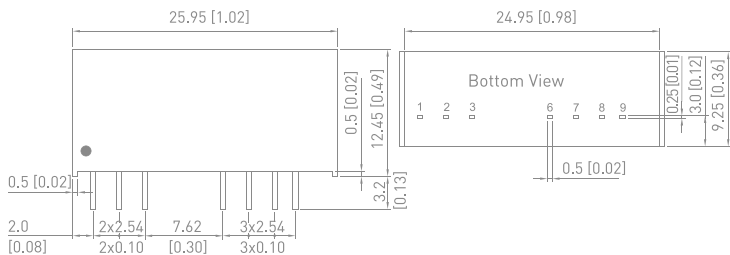

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | +Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 6   | +Vout         | +Vout         |
| 7   | NC            | Common        |
| 8   | NC            | NC            |
| 9   | -Vout         | -Vout         |

NC= No Connection


MBSU03 Series | 3W



- Industrial Standard SIP-4 Package
- Unregulated Output Voltage
- I/O Isolation 1500VDC
- Wide Operating Temperature Range
- Short Circuit Protection

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MBSU03-05S05 | 5<br>(4.5 - 5.5)    | 5                    | 600                 | 79%        |
| MBSU03-05S12 |                     | 12                   | 250                 | 83%        |
| MBSU03-05S15 |                     | 15                   | 200                 | 84%        |
| MBSU03-12S05 | 12<br>(10.8 - 13.2) | 5                    | 600                 | 81%        |
| MBSU03-12S12 |                     | 12                   | 250                 | 85%        |
| MBSU03-12S15 |                     | 15                   | 200                 | 85%        |
| MBSU03-24S05 | 24<br>(21.6 - 26.4) | 5                    | 600                 | 82%        |
| MBSU03-24S12 |                     | 12                   | 250                 | 86%        |
| MBSU03-24S15 |                     | 15                   | 200                 | 86%        |

Mechanical Dimensions

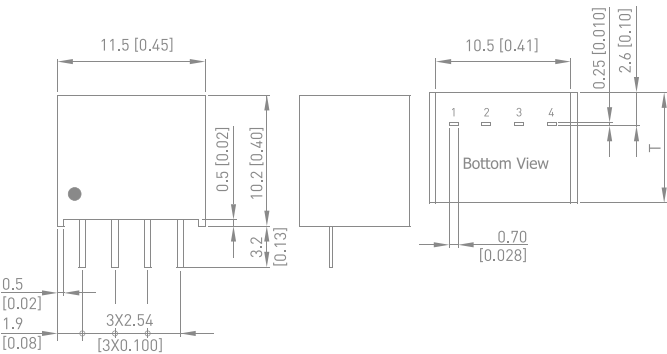

Pin Connections

| Pin | Function |
|-----|----------|
| 1   | -Vin     |
| 2   | +Vin     |
| 3   | -Vout    |
| 4   | +Vout    |

T: 8.6 [0.34] for 5V & 12V Input Models  
T: 9.6[0.38] for 24V Input Models


# MA03 Series 3W



- Industrial Standard SIP-7 Package
- Semi-regulated Output Voltage
- Very High Efficiency up to 89%
- High I/O Isolation 1000VDC
- Wide Operating Temperature Range
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MA03-05S05   | 5<br>(4.5 ~ 5.5)    | 5                    | 600                 | 83%        |
| MA03-05S09   |                     | 9                    | 333                 | 87%        |
| MA03-05S12   |                     | 12                   | 250                 | 85.5%      |
| MA03-05S15   |                     | 15                   | 200                 | 87.5%      |
| MA03-12S05   | 12<br>(10.8 ~ 13.2) | 5                    | 600                 | 84%        |
| MA03-12S09   |                     | 9                    | 333                 | 87.5%      |
| MA03-12S12   |                     | 12                   | 250                 | 88%        |
| MA03-12S15   |                     | 15                   | 200                 | 89%        |
| MA03-24S05   | 24<br>(21.6 ~ 26.4) | 5                    | 600                 | 82%        |
| MA03-24S09   |                     | 9                    | 333                 | 85%        |
| MA03-24S12   |                     | 12                   | 250                 | 85.5%      |
| MA03-24S15   |                     | 15                   | 200                 | 85%        |

## Mechanical Dimensions

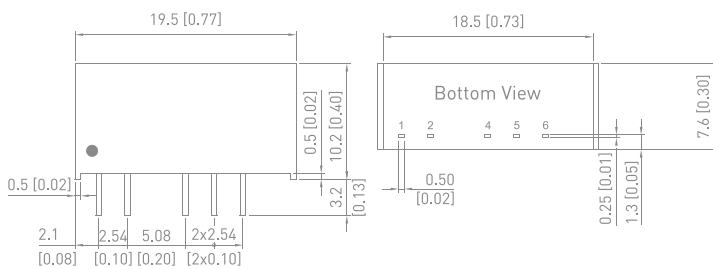

## Pin Connections

| Pin | Function |
|-----|----------|
| 1   | +Vin     |
| 2   | -Vin     |
| 3   | -Vout    |
| 5   | No Pin   |
| 6   | +Vout    |

NC= No Connection


MCW03 Series | 3W



- Compact SIP-8 Package
- Wide 2 : 1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1600 VDC
- Wide Operating Temperature Range
- Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MCW03-05S033 | 5<br>(4.5 - 9)      | 3.3                  | 700                 | 71%        |
| MCW03-05S05  |                     | 5                    | 600                 | 73%        |
| MCW03-05S12  |                     | 12                   | 250                 | 79%        |
| MCW03-05S15  |                     | 15                   | 200                 | 79%        |
| MCW03-05D05  |                     | ±5                   | ±300                | 74%        |
| MCW03-05D12  |                     | ±12                  | ±125                | 79%        |
| MCW03-05D15  |                     | ±15                  | ±100                | 79%        |
| MCW03-12S033 | 12<br>(9 - 18)      | 3.3                  | 700                 | 75%        |
| MCW03-12S05  |                     | 5                    | 600                 | 78%        |
| MCW03-12S12  |                     | 12                   | 250                 | 83%        |
| MCW03-12S15  |                     | 15                   | 200                 | 83%        |
| MCW03-12D05  |                     | ±5                   | ±300                | 79%        |
| MCW03-12D12  |                     | ±12                  | ±125                | 83%        |
| MCW03-12D15  |                     | ±15                  | ±100                | 83%        |
| MCW03-24S033 | 24<br>(18 - 36)     | 3.3                  | 700                 | 75%        |
| MCW03-24S05  |                     | 5                    | 600                 | 78%        |
| MCW03-24S12  |                     | 12                   | 250                 | 83%        |
| MCW03-24S15  |                     | 15                   | 200                 | 83%        |
| MCW03-24D05  |                     | ±5                   | ±300                | 80%        |
| MCW03-24D12  |                     | ±12                  | ±125                | 83%        |
| MCW03-24D15  |                     | ±15                  | ±100                | 83%        |
| MCW03-48S033 | 48<br>(36 - 75)     | 3.3                  | 700                 | 75%        |
| MCW03-48S05  |                     | 5                    | 600                 | 78%        |
| MCW03-48S12  |                     | 12                   | 250                 | 83%        |
| MCW03-48S15  |                     | 15                   | 200                 | 83%        |
| MCW03-48D05  |                     | ±5                   | ±300                | 80%        |
| MCW03-48D12  |                     | ±12                  | ±125                | 83%        |
| MCW03-48D15  |                     | ±15                  | ±100                | 83%        |

Mechanical Dimensions

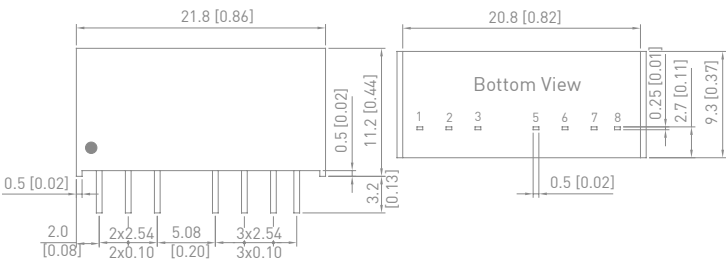

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 5   | NC            | NC            |
| 6   | +Vout         | +Vout         |
| 7   | -Vout         | Common        |
| 8   | NC            | -Vout         |

NC= No Connection


# MCWI03 Series | 3W



- Compact SIP-8 Package
- Ultra-wide 4 : 1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1600 VDC
- Wide Operating Temperature Range
- Overload and Short Circuit Protection
- Remote On/Off Control

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MCWI03-12S033 | 12<br>(4.5 - 18)    | 3.3                  | 700                 | 74%        |
| MCWI03-12S05  |                     | 5                    | 600                 | 78%        |
| MCWI03-12S12  |                     | 12                   | 250                 | 80%        |
| MCWI03-12S15  |                     | 15                   | 200                 | 80%        |
| MCWI03-12D05  |                     | ±5                   | ±300                | 80%        |
| MCWI03-12D12  |                     | ±12                  | ±125                | 80%        |
| MCWI03-12D15  |                     | ±15                  | ±100                | 80%        |
| MCWI03-24S033 | 24<br>(9 - 36)      | 3.3                  | 700                 | 75%        |
| MCWI03-24S05  |                     | 5                    | 600                 | 80%        |
| MCWI03-24S12  |                     | 12                   | 250                 | 81%        |
| MCWI03-24S15  |                     | 15                   | 200                 | 81%        |
| MCWI03-24D05  |                     | ±5                   | ±300                | 79%        |
| MCWI03-24D12  |                     | ±12                  | ±125                | 80%        |
| MCWI03-24D15  |                     | ±15                  | ±100                | 81%        |
| MCWI03-48S033 | 48<br>(18 - 75)     | 3.3                  | 700                 | 74%        |
| MCWI03-48S05  |                     | 5                    | 600                 | 79%        |
| MCWI03-48S12  |                     | 12                   | 250                 | 79%        |
| MCWI03-48S15  |                     | 15                   | 200                 | 79%        |
| MCWI03-48D05  |                     | ±5                   | ±300                | 79%        |
| MCWI03-48D12  |                     | ±12                  | ±125                | 79%        |
| MCWI03-48D15  |                     | ±15                  | ±100                | 80%        |

## Mechanical Dimensions

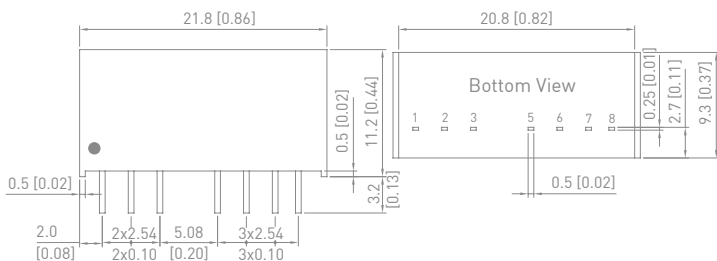

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 5   | NC            | NC            |
| 6   | +Vout         | +Vout         |
| 7   | -Vout         | Common        |
| 8   | NC            | -Vout         |

NC= No Connection


MCW04 Series | 4W



- Compact SIP-8 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1600 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1 Safety Approval, CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MCW04-12S05  | 12<br>(9 - 18)      | 5                    | 800                 | 82%        |
| MCW04-12S12  |                     | 12                   | 333                 | 87%        |
| MCW04-12S15  |                     | 15                   | 266                 | 86%        |
| MCW04-12S24  |                     | 24                   | 166                 | 86%        |
| MCW04-12D12  |                     | ±12                  | ±166                | 85%        |
| MCW04-12D15  |                     | ±15                  | ±133                | 86%        |
| MCW04-24S05  | 24<br>(18 - 36)     | 5                    | 800                 | 81%        |
| MCW04-24S12  |                     | 12                   | 333                 | 86%        |
| MCW04-24S15  |                     | 15                   | 266                 | 86%        |
| MCW04-24S24  |                     | 24                   | 166                 | 86%        |
| MCW04-24D12  |                     | ±12                  | ±166                | 86%        |
| MCW04-24D15  |                     | ±15                  | ±133                | 85%        |
| MCW04-48S05  | 48<br>(36 - 75)     | 5                    | 800                 | 80%        |
| MCW04-48S12  |                     | 12                   | 333                 | 85%        |
| MCW04-48S15  |                     | 15                   | 266                 | 83%        |
| MCW04-48S24  |                     | 24                   | 166                 | 86%        |
| MCW04-48D12  |                     | ±12                  | ±166                | 84%        |
| MCW04-48D15  |                     | ±15                  | ±133                | 85%        |

Mechanical Dimensions

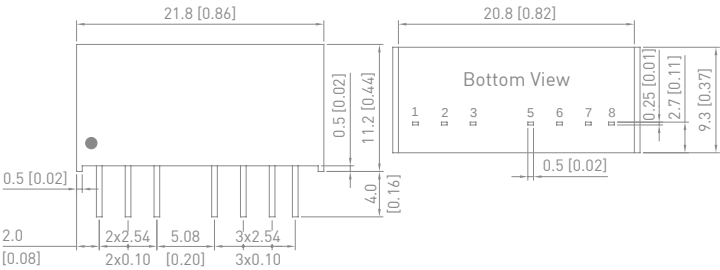

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 5   | NC            | NC            |
| 6   | +Vout         | +Vout         |
| 7   | -Vout         | Common        |
| 8   | NC            | -Vout         |

NC= No Connection


# MCWI04 Series | 4W



- Compact SIP-8 Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1600 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1 Safety Approval, CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MCWI04-24S05 | 24<br>(9 - 36)      | 5                    | 800                 | 79         |
| MCWI04-24S12 |                     | 12                   | 333                 | 83         |
| MCWI04-24S15 |                     | 15                   | 266                 | 83         |
| MCWI04-24S24 |                     | 24                   | 166                 | 83         |
| MCWI04-24D12 |                     | ±12                  | ±166                | 83         |
| MCWI04-24D15 |                     | ±15                  | ±133                | 83         |
| MCWI04-48S05 | 48<br>(18 - 75)     | 5                    | 800                 | 78         |
| MCWI04-48S12 |                     | 12                   | 333                 | 82         |
| MCWI04-48S15 |                     | 15                   | 266                 | 82         |
| MCWI04-48S24 |                     | 24                   | 166                 | 82         |
| MCWI04-48D12 |                     | ±12                  | ±166                | 82         |
| MCWI04-48D15 |                     | ±15                  | ±133                | 82         |

## Mechanical Dimensions

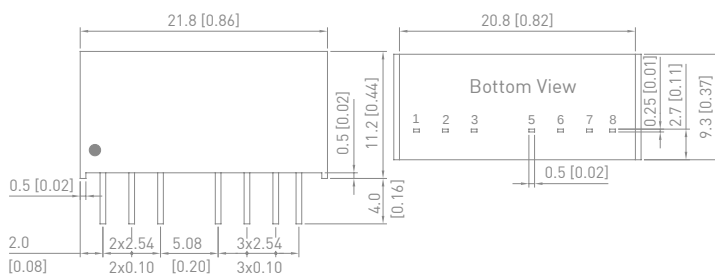

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 5   | NC            | NC            |
| 6   | +Vout         | +Vout         |
| 7   | -Vout         | Common        |
| 8   | NC            | -Vout         |

NC= No Connection


MCWI05 Series | 5W



- Smallest Encapsulated 5W Converter
- Ultra-compact SIP-8 Package
- Ultra-wide 4 : 1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-Voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MCWI05-12S033 | 12<br>(4.5 - 18)    | 3.3                  | 1,075               | 76%        |
| MCWI05-12S05  |                     | 5                    | 1,000               | 81%        |
| MCWI05-12S12  |                     | 12                   | 417                 | 83%        |
| MCWI05-12S15  |                     | 15                   | 334                 | 83%        |
| MCWI05-12S24  |                     | 24                   | 209                 | 82%        |
| MCWI05-12D12  |                     | ±12                  | ±209                | 81%        |
| MCWI05-12D15  |                     | ±15                  | ±167                | 82%        |
| MCWI05-24S033 | 24<br>(9 - 36)      | 3.3                  | 1,075               | 76%        |
| MCWI05-24S05  |                     | 5                    | 1,000               | 81%        |
| MCWI05-24S12  |                     | 12                   | 417                 | 83%        |
| MCWI05-24S15  |                     | 15                   | 334                 | 84%        |
| MCWI05-24S24  |                     | 24                   | 209                 | 83%        |
| MCWI05-24D12  |                     | ±12                  | ±209                | 82%        |
| MCWI05-24D15  |                     | ±15                  | ±167                | 82%        |
| MCWI05-48S033 | 48<br>(18 - 75)     | 3.3                  | 1,075               | 76%        |
| MCWI05-48S05  |                     | 5                    | 1,000               | 80%        |
| MCWI05-48S12  |                     | 12                   | 417                 | 83%        |
| MCWI05-48S15  |                     | 15                   | 334                 | 84%        |
| MCWI05-48S24  |                     | 24                   | 209                 | 82%        |
| MCWI05-48D12  |                     | ±12                  | ±209                | 82%        |
| MCWI05-48D15  |                     | ±15                  | ±167                | 83%        |

Mechanical Dimensions

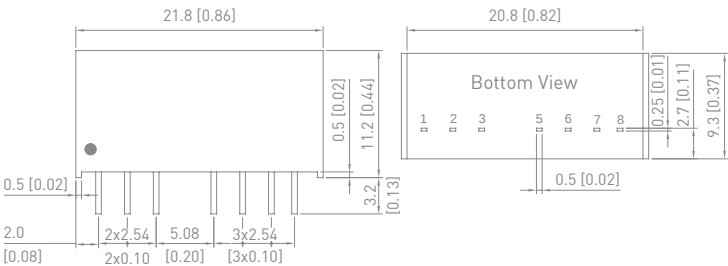

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 5   | NC            | NC            |
| 6   | +Vout         | +Vout         |
| 7   | -Vout         | Common        |
| 8   | NC            | -Vout         |

NC= No Connection

NEW


# MCWI08 Series | 8W



- Smallest Encapsulated 8W Converter
- Industrial Standard SIP-8 Package
- Ultra-wide 4 : 1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Very Low No Load Power Consumption
- Under-voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MCWI08-12S05 | 12<br>(4.5 - 18)    | 5                    | 1600                | 84%        |
| MCWI08-12S12 |                     | 12                   | 665                 | 86%        |
| MCWI08-12S15 |                     | 15                   | 535                 | 86%        |
| MCWI08-12S24 |                     | 24                   | 335                 | 86%        |
| MCWI08-12D12 |                     | ±12                  | ±335                | 86%        |
| MCWI08-12D15 | 24<br>(9 - 36)      | ±15                  | ±265                | 86%        |
| MCWI08-24S05 |                     | 5                    | 1600                | 84%        |
| MCWI08-24S12 |                     | 12                   | 665                 | 86%        |
| MCWI08-24S15 |                     | 15                   | 535                 | 86%        |
| MCWI08-24S24 |                     | 24                   | 335                 | 86%        |
| MCWI08-24D12 | 48<br>(18 - 75)     | ±12                  | ±335                | 86%        |
| MCWI08-24D15 |                     | ±15                  | ±265                | 86%        |
| MCWI08-48S05 |                     | 5                    | 1600                | 84%        |
| MCWI08-48S12 |                     | 12                   | 665                 | 86%        |
| MCWI08-48S15 |                     | 15                   | 535                 | 86%        |
| MCWI08-48S24 |                     | 24                   | 335                 | 86%        |
| MCWI08-48D12 |                     | ±12                  | ±335                | 86%        |
| MCWI08-48D15 |                     | ±15                  | ±265                | 86%        |

## Mechanical Dimensions

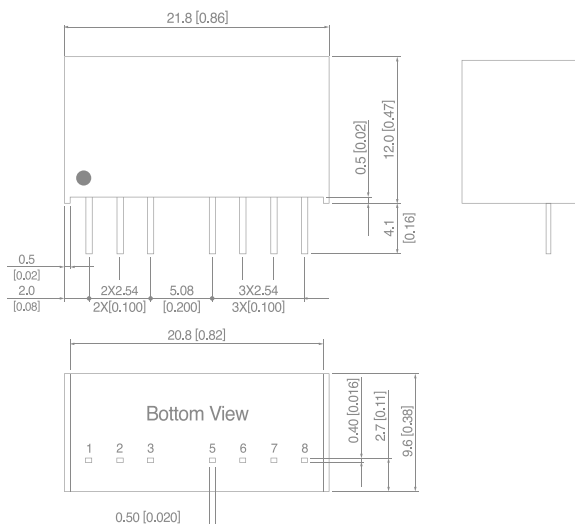

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 5   | NC            | NC            |
| 6   | +Vout         | +Vout         |
| 7   | -Vout         | Common        |
| 8   | NC            | -Vout         |

NC : No Connection

NEW


## MCWI10 Series | 10W



- Smallest Encapsulated 10W Converter
- Industrial Standard SIP-8 Package
- Ultra-high Power Density 65W/in<sup>3</sup>
- Ultra-wide 4 : 1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Very Low No Load Power Consumption
- Under-voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1 Safety Approval

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MCWI10-12S051 | 12<br>(4.5 - 18)    | 5.1                  | 2000                | 89%        |
| MCWI10-12S12  |                     | 12                   | 833                 | 89%        |
| MCWI10-12S15  |                     | 15                   | 666                 | 89%        |
| MCWI10-12S24  |                     | 24                   | 416                 | 89%        |
| MCWI10-12D12  |                     | ±12                  | ±416                | 88%        |
| MCWI10-12D15  |                     | ±15                  | ±333                | 89%        |
| MCWI10-24S051 | 24<br>(9 - 36)      | 5.1                  | 2000                | 88%        |
| MCWI10-24S12  |                     | 12                   | 833                 | 89%        |
| MCWI10-24S15  |                     | 15                   | 666                 | 89%        |
| MCWI10-24S24  |                     | 24                   | 416                 | 88%        |
| MCWI10-24D12  |                     | ±12                  | ±416                | 88%        |
| MCWI10-24D15  |                     | ±15                  | ±333                | 88%        |
| MCWI10-48S051 | 48<br>(18 - 75)     | 5.1                  | 2000                | 88%        |
| MCWI10-48S12  |                     | 12                   | 833                 | 89%        |
| MCWI10-48S15  |                     | 15                   | 666                 | 89%        |
| MCWI10-48S24  |                     | 24                   | 416                 | 89%        |
| MCWI10-48D12  |                     | ±12                  | ±416                | 89%        |
| MCWI10-48D15  |                     | ±15                  | ±333                | 89%        |

## Mechanical Dimensions

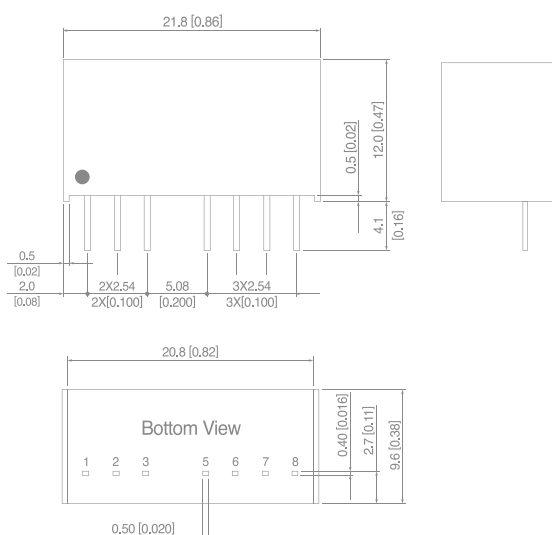

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | +Vin          | +Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 5   | NC            | NC            |
| 6   | +Vout         | +Vout         |
| 7   | -Vout         | Common        |
| 8   | NC            | -Vout         |

NC : No Connection


## MSLU100 Series | 1W



- Industrial SMD Package
- Unregulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Cleaning-washable Process Available(option)
- Qualified for Lead-free Reflow Solder Process According to IPC/JEDEC J-STD-020D.1
- Tape & Reel Package Available
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MSLU101      | 5<br>(4.5 - 5.5)    | 3.3                  | 300                 | 73%        |
| MSLU102      |                     | 5                    | 200                 | 78%        |
| MSLU103      |                     | 9                    | 110                 | 78%        |
| MSLU104      |                     | 12                   | 84                  | 78%        |
| MSLU105      |                     | 15                   | 67                  | 79%        |
| MSLU106      |                     | ±5                   | ±100                | 74%        |
| MSLU108      |                     | ±12                  | ±42                 | 78%        |
| MSLU109      |                     | ±15                  | ±33                 | 78%        |
| MSLU111      |                     | 3.3                  | 300                 | 74%        |
| MSLU112      | 12<br>(10.8 - 13.2) | 5                    | 200                 | 76%        |
| MSLU113      |                     | 9                    | 110                 | 78%        |
| MSLU114      |                     | 12                   | 84                  | 79%        |
| MSLU115      |                     | 15                   | 67                  | 80%        |
| MSLU116      |                     | ±5                   | ±100                | 74%        |
| MSLU118      |                     | ±12                  | ±42                 | 78%        |
| MSLU119      |                     | ±15                  | ±33                 | 79%        |
| MSLU154      | 15                  | 12                   | 84                  | 78%        |
| MSLU155      | (13.5 - 16.5)       | 15                   | 67                  | 78%        |
| MSLU121      | 24<br>(21.6 - 26.4) | 3.3                  | 300                 | 72%        |
| MSLU122      |                     | 5                    | 200                 | 78%        |
| MSLU123      |                     | 9                    | 110                 | 77%        |
| MSLU124      |                     | 12                   | 84                  | 77%        |
| MSLU125      |                     | 15                   | 67                  | 79%        |
| MSLU126      |                     | ±5                   | ±100                | 73%        |
| MSLU128      |                     | ±12                  | ±42                 | 78%        |
| MSLU129      |                     | ±15                  | ±33                 | 78%        |

### Mechanical Dimensions

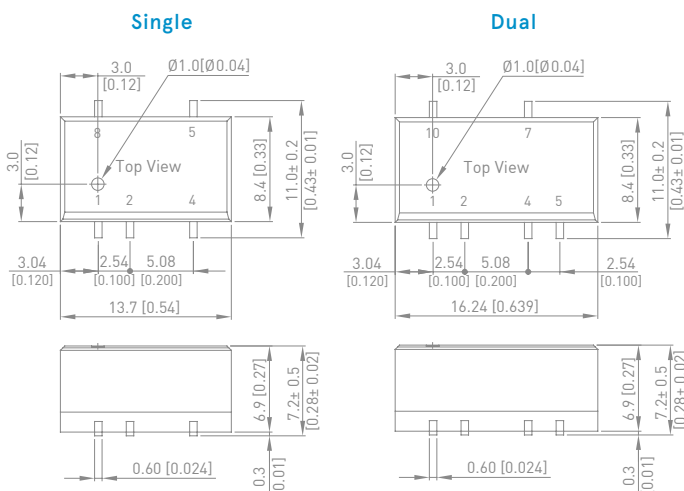

### Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 3   | No Pin | No Pin |
| 4   | -Vout  | Common |
| 5   | +Vout  | -Vout  |
| 6   | No Pin | No Pin |
| 7   | No Pin | +Vout  |
| 8   | NA     | No Pin |
| 9   | ---    | No Pin |
| 10  | ---    | NA     |

NA : Not Available for Electrical Connection


MSLU300 Series | 1W



- Industrial SMD Package
  - Unregulated Output Voltage
  - I/O Isolation 3000 VDC
  - Wide Operating Temperature Range
  - Cleaning-washable Process
- Available(option)
- Qualified for Lead-free Reflow Solder Process According to IPC/JEDEC J-STD-020D.1
  - Tape & Reel Package Available

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MSLU301      | 5<br>(4.5 - 5.5)    | 3.3                  | 260                 | 72%        |
| MSLU302      |                     | 5                    | 200                 | 75%        |
| MSLU304      |                     | 12                   | 84                  | 79%        |
| MSLU305      |                     | 15                   | 67                  | 80%        |
| MSLU306      |                     | ±5                   | ±100                | 75%        |
| MSLU308      |                     | ±12                  | ±42                 | 79%        |
| MSLU309      |                     | ±15                  | ±34                 | 80%        |
| MSLU311      |                     | 3.3                  | 260                 | 73%        |
| MSLU312      |                     | 5                    | 200                 | 76%        |
| MSLU314      | 12<br>(10.8 - 13.2) | 12                   | 84                  | 80%        |
| MSLU315      |                     | 15                   | 67                  | 81%        |
| MSLU316      |                     | ±5                   | ±100                | 76%        |
| MSLU318      |                     | ±12                  | ±42                 | 80%        |
| MSLU319      |                     | ±15                  | ±34                 | 80%        |
| MSLU321      | 24<br>(21.6 - 26.4) | 3.3                  | 260                 | 70%        |
| MSLU322      |                     | 5                    | 200                 | 73%        |
| MSLU324      |                     | 12                   | 84                  | 79%        |
| MSLU325      |                     | 15                   | 67                  | 79%        |
| MSLU326      |                     | ±5                   | ±100                | 73%        |
| MSLU328      |                     | ±12                  | ±42                 | 79%        |
| MSLU329      |                     | ±15                  | ±34                 | 79%        |

Mechanical Dimensions

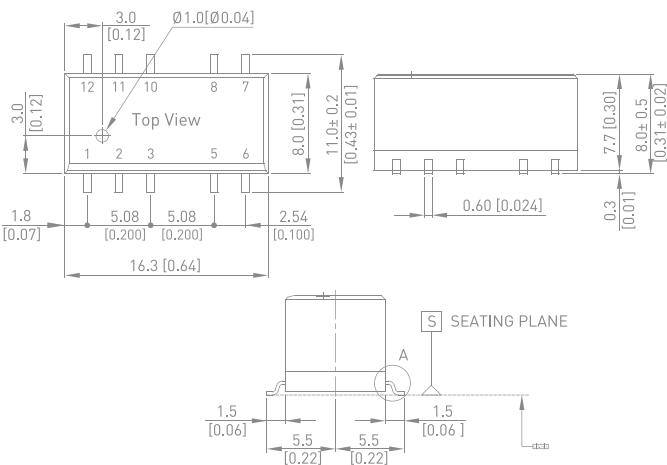

Pin Connections

| Pin      | Single | Dual   |
|----------|--------|--------|
| 1        | -Vin   | -Vin   |
| 2        | +Vin   | +Vin   |
| 3        | NA     | NA     |
| 5        | -Vout  | Common |
| 6        | NA     | -Vout  |
| 7        | NA     | NA     |
| 8        | +Vout  | +Vout  |
| 10,11,12 | NA     | NA     |

NA : Not Available for Electrical Connection

# MSPU01H Series | 1W




- Industrial SMD Package
- Unregulated Output Voltage
- I/O Isolation 3000 VDC
- Wide Operating Temperature Range
- Overload and Short Circuit Protection
- Cleaning-washable Process

Available(option)

- Qualified for Lead-free Reflow Solder Process According to IPC/JEDEC J-STD-020D.1
- Tape & Reel Package Available
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number    | Input Voltage (VDC)  | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|-----------------|----------------------|----------------------|---------------------|------------|
| MSPU01-033S033H | 3.3<br>(2.97 - 3.63) | 3.3                  | 300                 | 77%        |
| MSPU01-033S05H  |                      | 5                    | 200                 | 79%        |
| MSPU01-033S12H  |                      | 12                   | 84                  | 81%        |
| MSPU01-033S15H  |                      | 15                   | 67                  | 80%        |
| MSPU01-033D05H  |                      | ±5                   | ±100                | 79%        |
| MSPU01-033D12H  |                      | ±12                  | ±42                 | 81%        |
| MSPU01-033D15H  |                      | ±15                  | ±33                 | 80%        |
| MSPU01-05S033H  | 5<br>(4.5 - 5.5)     | 3.3                  | 300                 | 79%        |
| MSPU01-05S05H   |                      | 5                    | 200                 | 82%        |
| MSPU01-05S12H   |                      | 12                   | 84                  | 84%        |
| MSPU01-05S15H   |                      | 15                   | 67                  | 85%        |
| MSPU01-05D05H   |                      | ±5                   | ±100                | 82%        |
| MSPU01-05D12H   |                      | ±12                  | ±42                 | 84%        |
| MSPU01-05D15H   |                      | ±15                  | ±33                 | 84%        |
| MSPU01-12S033H  | 12<br>(10.8 - 13.2)  | 3.3                  | 300                 | 78%        |
| MSPU01-12S05H   |                      | 5                    | 200                 | 81%        |
| MSPU01-12S12H   |                      | 12                   | 84                  | 83%        |
| MSPU01-12S15H   |                      | 15                   | 67                  | 83%        |
| MSPU01-12D05H   |                      | ±5                   | ±100                | 82%        |
| MSPU01-12D12H   |                      | ±12                  | ±42                 | 83%        |
| MSPU01-12D15H   |                      | ±15                  | ±33                 | 83%        |

## Mechanical Dimensions

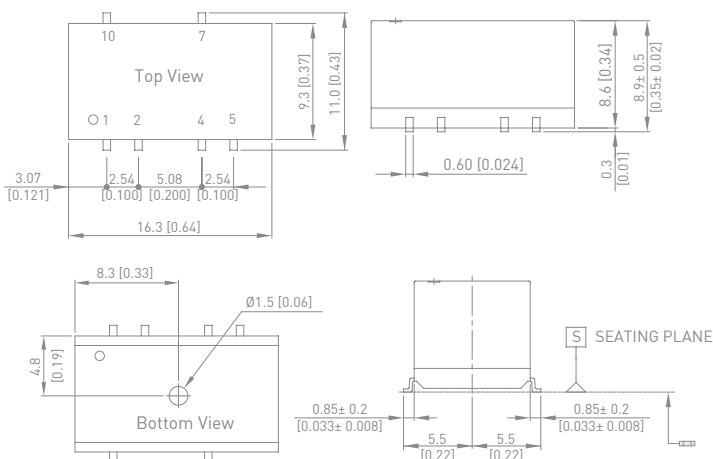

## Pin Connections


| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 3   | No Pin | No Pin |
| 4   | -Vout  | Common |
| 5   | NC     | -Vout  |
| 6   | No Pin | No Pin |
| 7   | +Vout  | +Vout  |
| 8   | No Pin | No Pin |
| 9   | No Pin | No Pin |
| 10  | NC     | NC     |

NC: No Connection



- | Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MSCW01-05S05 | 5<br>(4.5 - 9)      | 5                    | 200                 | 78%        |
| MSCW01-05S12 |                     | 12                   | 83                  | 79%        |
| MSCW01-05S15 |                     | 15                   | 67                  | 81%        |
| MSCW01-05D12 |                     | ±12                  | ±42                 | 79%        |
| MSCW01-05D15 |                     | ±15                  | ±33                 | 80%        |
| MSCW01-12S05 | 12<br>(9 - 18)      | 5                    | 200                 | 79%        |
| MSCW01-12S12 |                     | 12                   | 83                  | 79%        |
| MSCW01-12S15 |                     | 15                   | 67                  | 82%        |
| MSCW01-12D12 |                     | ±12                  | ±42                 | 81%        |
| MSCW01-12D15 |                     | ±15                  | ±33                 | 80%        |
| MSCW01-24S05 | 24<br>(18 - 36)     | 5                    | 200                 | 79%        |
| MSCW01-24S12 |                     | 12                   | 83                  | 82%        |
| MSCW01-24S15 |                     | 15                   | 67                  | 82%        |
| MSCW01-24D12 |                     | ±12                  | ±42                 | 82%        |
| MSCW01-24D15 |                     | ±15                  | ±33                 | 82%        |
| MSCW01-48S05 | 48<br>(36 - 75)     | 5                    | 200                 | 79%        |
| MSCW01-48S12 |                     | 12                   | 83                  | 80%        |
| MSCW01-48S15 |                     | 15                   | 67                  | 80%        |
| MSCW01-48D12 |                     | ±12                  | ±42                 | 81%        |
| MSCW01-48D15 |                     | ±15                  | ±33                 | 81%        |

## Pin Connections

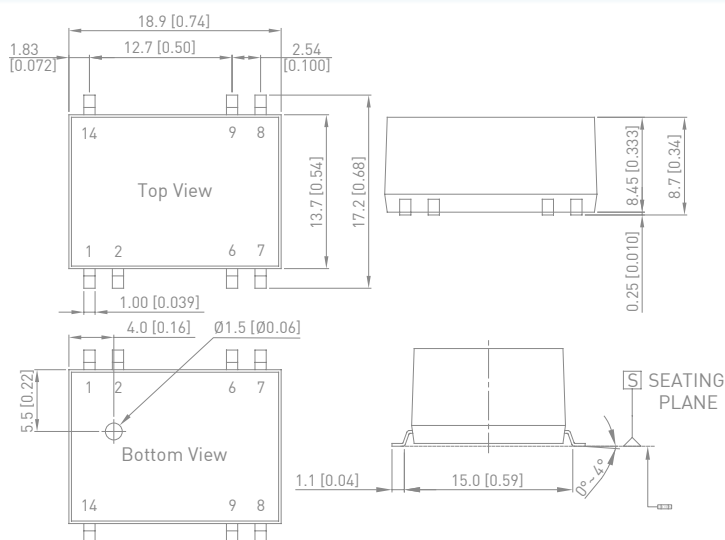

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | Remote On/Off | Remote On/Off |
| 6   | NC            | Common        |
| 7   | NC            | -Vout         |
| 8   | +Vout         | +Vout         |
| 9   | -Vout         | Common        |
| 14  | +Vin          | +Vin          |

NC= No Connection

NEW

# MSU01 Series | 1W




- Compact Industrial SMD Package
- Unregulated Output Voltage
- I/O Isolation 1500 VDC
- Efficiency up to 91%
- Short Circuit Protection (Hiccup Mode)
- Wide Operating Temperature Range
- Cleaning-washable Process Available
- Qualified for Lead-free Reflow Solder Process according to IPC/JEDEC J-STD-020D.1
- UL/cUL/IEC/EN 62368-1 Safety Approval


| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MSU01-033S033 | 3.3                 | 3.3                  | 300                 | 84%        |
| MSU01-033S05  | (2.97 - 3.63)       | 5                    | 200                 | 87%        |
| MSU01-05S033  | 5<br>(4.5 - 5.5)    | 3.3                  | 300                 | 85%        |
| MSU01-05S05   |                     | 5                    | 200                 | 88%        |
| MSU01-05S12   |                     | 12                   | 84                  | 90%        |
| MSU01-05S15   |                     | 15                   | 67                  | 90%        |
| MSU01-05S24   |                     | 24                   | 42                  | 90%        |
| MSU01-05D05   |                     | ±5                   | ±100                | 87%        |
| MSU01-05D12   |                     | ±12                  | ±42                 | 90%        |
| MSU01-05D15   |                     | ±15                  | ±33                 | 91%        |
| MSU01-12S033  | 12<br>(10.8 - 13.2) | 3.3                  | 300                 | 84%        |
| MSU01-12S05   |                     | 5                    | 200                 | 87%        |
| MSU01-12S12   |                     | 12                   | 84                  | 89%        |
| MSU01-12S15   |                     | 15                   | 67                  | 89%        |
| MSU01-12S24   |                     | 24                   | 42                  | 88%        |
| MSU01-12D05   |                     | ±5                   | ±100                | 88%        |
| MSU01-12D12   |                     | ±12                  | ±42                 | 90%        |
| MSU01-12D15   |                     | ±15                  | ±33                 | 90%        |
| MSU01-24S033  | 24<br>(21.6 - 26.4) | 3.3                  | 300                 | 81%        |
| MSU01-24S05   |                     | 5                    | 200                 | 84%        |
| MSU01-24S12   |                     | 12                   | 84                  | 85%        |
| MSU01-24S15   |                     | 15                   | 67                  | 86%        |
| MSU01-24S24   |                     | 24                   | 42                  | 85%        |
| MSU01-24D05   |                     | ±5                   | ±100                | 82%        |
| MSU01-24D12   |                     | ±12                  | ±42                 | 85%        |
| MSU01-24D15   |                     | ±15                  | ±33                 | 85%        |

## Mechanical Dimensions

### Mechanical Dimensions (Single Output)



### Mechanical Dimensions (Dual Output)



## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 3   | No Pin | No Pin |
| 4   | -Vout  | Common |
| 5   | +Vout  | -Vout  |
| 6   | No Pin | No Pin |
| 7   | No Pin | +Vout  |
| 8   | NA     | No Pin |
| 9   | ---    | No Pin |
| 10  | ---    | NA     |


NA = Not Available for Electrical Connection



- Tape & Reel Package Available

|         |               |     |      |     |
|---------|---------------|-----|------|-----|
| MSLU401 |               | 3.3 | 500  | 70% |
| MSLU402 |               | 5   | 400  | 73% |
| MSLU404 | 5             | 12  | 165  | 77% |
| MSLU406 | (4.5 ~ 5.5)   | ±5  | ±200 | 74% |
| MSLU408 |               | ±12 | ±83  | 76% |
| MSLU409 |               | ±15 | ±66  | 76% |
| MSLU411 |               | 3.3 | 500  | 72% |
| MSLU412 |               | 5   | 400  | 75% |
| MSLU414 | 12            | 12  | 165  | 79% |
| MSLU418 | (10.8 ~ 13.2) | ±12 | ±83  | 80% |
| MSLU419 |               | ±15 | ±66  | 80% |
| MSLU421 |               | 3.3 | 500  | 72% |
| MSLU422 |               | 5   | 400  | 75% |
| MSLU424 | 24            | 12  | 165  | 79% |
| MSLU428 | (21.6 ~ 26.4) | ±12 | ±83  | 79% |
| MSLU429 |               | ±15 | ±66  | 79% |

## Pin Connections

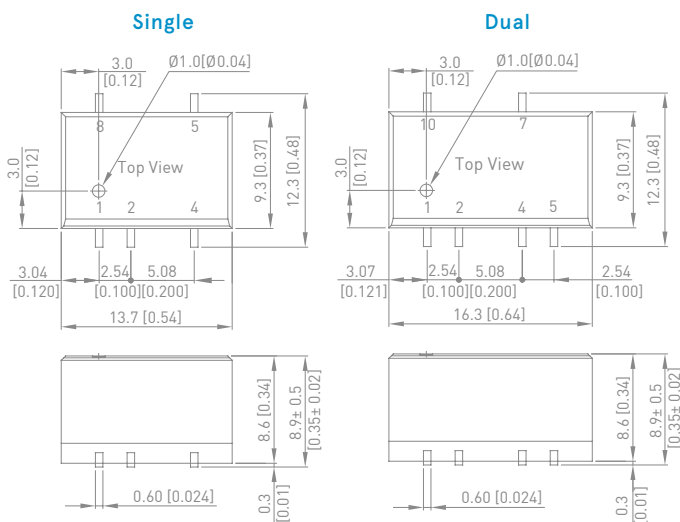

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 4   | -Vout  | Common |
| 5   | +Vout  | -Vout  |
| 7   | No Pin | +Vout  |
| 8   | NA     | No Pin |
| 10  | No Pin | NA     |

NA : Not Available for Electrical Connection


## MSDW1000 Series | 2W



- Industrial SMD Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Under-voltage and Short Circuit Protection
- Cleaning-washable Process Available(option)
- Qualified for Lead-free Reflow Solder Process According to IPC/JEDEC J-STD-020D.1
- Tape & Reel Package Available
- UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MSDW1011     | 5<br>(4.5 - 9)      | 3.3                  | 500                 | 70%        |
| MSDW1012     |                     | 5                    | 400                 | 73%        |
| MSDW1013     |                     | 12                   | 167                 | 75%        |
| MSDW1014     |                     | 15                   | 134                 | 73%        |
| MSDW1015     |                     | ±5                   | ±200                | 64%        |
| MSDW1016     |                     | ±12                  | ±83                 | 69%        |
| MSDW1017     |                     | ±15                  | ±67                 | 71%        |
| MSDW1021     | 12<br>(9 - 18)      | 3.3                  | 500                 | 73%        |
| MSDW1022     |                     | 5                    | 400                 | 77%        |
| MSDW1023     |                     | 12                   | 167                 | 80%        |
| MSDW1024     |                     | 15                   | 134                 | 80%        |
| MSDW1025     |                     | ±5                   | ±200                | 73%        |
| MSDW1026     |                     | ±12                  | ±83                 | 78%        |
| MSDW1027     |                     | ±15                  | ±67                 | 78%        |
| MSDW1031     | 24<br>(18 - 36)     | 3.3                  | 500                 | 72%        |
| MSDW1032     |                     | 5                    | 400                 | 77%        |
| MSDW1033     |                     | 12                   | 167                 | 80%        |
| MSDW1034     |                     | 15                   | 134                 | 81%        |
| MSDW1035     |                     | ±5                   | ±200                | 74%        |
| MSDW1036     |                     | ±12                  | ±83                 | 78%        |
| MSDW1037     |                     | ±15                  | ±67                 | 80%        |
| MSDW1041     | 48<br>(36 - 75)     | 3.3                  | 500                 | 71%        |
| MSDW1042     |                     | 5                    | 400                 | 73%        |
| MSDW1043     |                     | 12                   | 167                 | 79%        |
| MSDW1044     |                     | 15                   | 134                 | 79%        |
| MSDW1045     |                     | ±5                   | ±200                | 71%        |
| MSDW1046     |                     | ±12                  | ±83                 | 77%        |
| MSDW1047     |                     | ±15                  | ±67                 | 77%        |

### Mechanical Dimensions

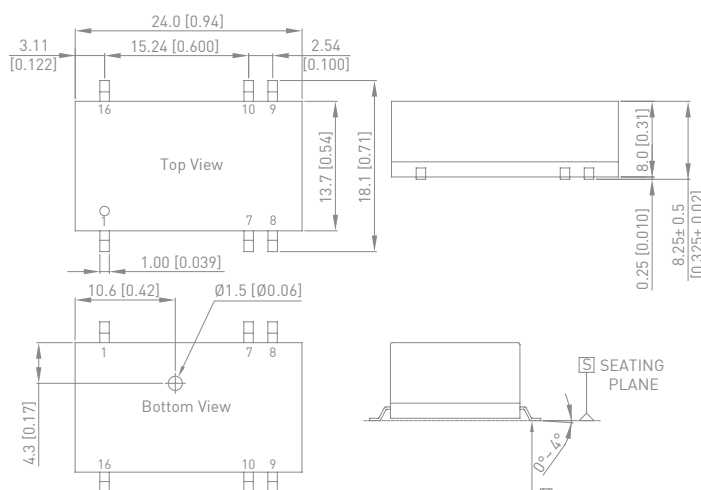

### Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC: No Connection

# MSCWI02 Series | 2W



- Very Compact SMD Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection


- Remote On/Off Control
- EMI Emission EN55032 Class A Approved
- Cleaning-washable Process Available(option)
- Qualified for Lead-free Reflow Solder Process

According to IPC/JEDEC J-STD-020D.1

- Tape & Reel Package Available
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MSCWI02-05S05 | 5<br>(4.5 - 12)     | 5                    | 400                 | 80%        |
| MSCWI02-05S12 |                     | 12                   | 167                 | 84%        |
| MSCWI02-05S15 |                     | 15                   | 134                 | 83%        |
| MSCWI02-05S24 |                     | 24                   | 83                  | 84%        |
| MSCWI02-05D12 |                     | ±12                  | ±83                 | 83%        |
| MSCWI02-05D15 |                     | ±15                  | ±67                 | 82%        |
| MSCWI02-24S05 | 24<br>(9 - 36)      | 5                    | 400                 | 80%        |
| MSCWI02-24S12 |                     | 12                   | 167                 | 84%        |
| MSCWI02-24S15 |                     | 15                   | 134                 | 85%        |
| MSCWI02-24S24 |                     | 24                   | 83                  | 85%        |
| MSCWI02-24D12 |                     | ±12                  | ±83                 | 83%        |
| MSCWI02-24D15 |                     | ±15                  | ±67                 | 83%        |
| MSCWI02-48S05 | 48<br>(18 - 75)     | 5                    | 400                 | 78%        |
| MSCWI02-48S12 |                     | 12                   | 167                 | 82%        |
| MSCWI02-48S15 |                     | 15                   | 134                 | 83%        |
| MSCWI02-48S24 |                     | 24                   | 83                  | 84%        |
| MSCWI02-48D12 |                     | ±12                  | ±83                 | 82%        |
| MSCWI02-48D15 |                     | ±15                  | ±67                 | 82%        |

## Mechanical Dimensions

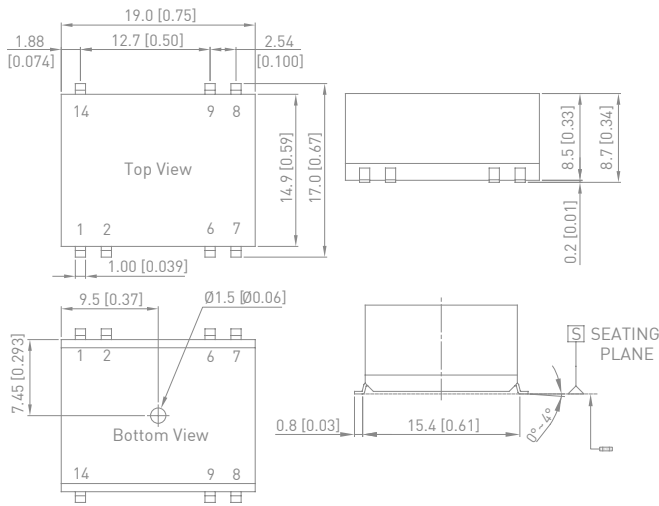

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | Remote On/Off | Remote On/Off |
| 6   | NC            | Common        |
| 7   | NC            | -Vout         |
| 8   | +Vout         | +Vout         |
| 9   | -Vout         | Common        |
| 14  | +Vin          | +Vin          |

NC= No Connection

NEW

# MSU02 Series | 2W




- Compact Industrial SMD Package
- Unregulated Output Voltage
- I/O Isolation 1500 VDC
- Efficiency up to 91%
- Short Circuit Protection (Hiccup Mode)
- Wide Operating Temperature Range
- Cleaning-washable Process Available (optional)
- Qualified for Lead-free Reflow Solder Process according to IPC/JEDEC J-STD-020D.1


| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MSU02-05S033 | 5<br>(4.5 - 5.5)    | 3.3                  | 600                 | 84%        |
| MSU02-05S05  |                     | 5                    | 400                 | 88%        |
| MSU02-05S12  |                     | 12                   | 167                 | 91%        |
| MSU02-05S15  |                     | 15                   | 134                 | 91%        |
| MSU02-05S24  |                     | 24                   | 83                  | 90%        |
| MSU02-05D05  |                     | ±5                   | ±200                | 87%        |
| MSU02-05D12  |                     | ±12                  | ±83                 | 91%        |
| MSU02-05D15  |                     | ±15                  | ±67                 | 91%        |
| MSU02-12S033 | 12<br>(10.8 - 13.2) | 3.3                  | 600                 | 83%        |
| MSU02-12S05  |                     | 5                    | 400                 | 86%        |
| MSU02-12S12  |                     | 12                   | 167                 | 90%        |
| MSU02-12S15  |                     | 15                   | 134                 | 91%        |
| MSU02-12S24  |                     | 24                   | 83                  | 89%        |
| MSU02-12D05  |                     | ±5                   | ±200                | 88%        |
| MSU02-12D12  |                     | ±12                  | ±83                 | 90%        |
| MSU02-12D15  |                     | ±15                  | ±67                 | 91%        |
| MSU02-24S033 | 24<br>(21.6 - 26.4) | 3.3                  | 600                 | 84%        |
| MSU02-24S05  |                     | 5                    | 400                 | 87%        |
| MSU02-24S12  |                     | 12                   | 167                 | 90%        |
| MSU02-24S15  |                     | 15                   | 134                 | 90%        |
| MSU02-24S24  |                     | 24                   | 83                  | 90%        |
| MSU02-24D05  |                     | ±5                   | ±200                | 87%        |
| MSU02-24D12  |                     | ±12                  | ±83                 | 90%        |
| MSU02-24D15  |                     | ±15                  | ±33                 | 85%        |

## Mechanical Dimensions

### Mechanical Dimensions (Single Output)

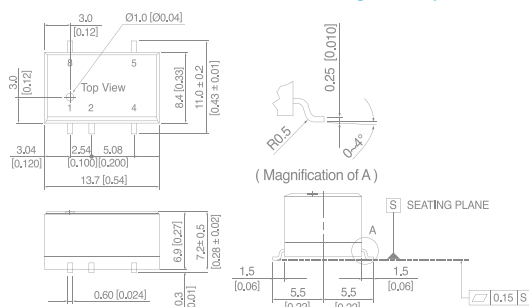

### Mechanical Dimensions (Dual Output)

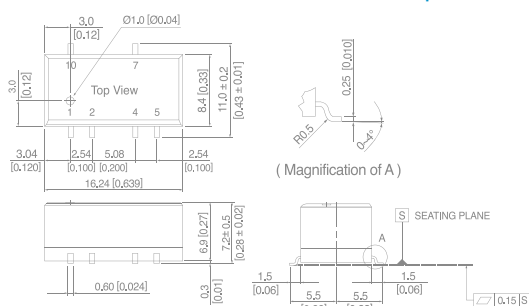

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 3   | No Pin | No Pin |
| 4   | -Vout  | Common |
| 5   | +Vout  | -Vout  |
| 6   | No Pin | No Pin |
| 7   | No Pin | +Vout  |
| 8   | NA     | No Pin |
| 9   | ---    | No Pin |
| 10  | ---    | NA     |

NA = Not Available for Electrical Connection

MSDWI03 Series | 3W



- Compact SMD Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Under-voltage, Overload and Short Circuit

Protection

- Remote On/Off Control
- Cleaning-washable Process


Available(option)

- Qualified for Lead-free Reflow Solder Process
- According to IPC/JEDECJ-STD-020D.1
- Tape & Reel Package Available
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1

Safety Approval

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MSDWI03-24S033 | 24<br>(9 ~ 36)      | 3.3                  | 600                 | 75%        |
| MSDWI03-24S05  |                     | 5                    | 600                 | 78%        |
| MSDWI03-24S12  |                     | 12                   | 250                 | 80%        |
| MSDWI03-24S15  |                     | 15                   | 200                 | 80%        |
| MSDWI03-24S24  |                     | 24                   | 125                 | 80%        |
| MSDWI03-24D05  |                     | ±5                   | ±300                | 77%        |
| MSDWI03-24D12  |                     | ±12                  | ±125                | 80%        |
| MSDWI03-24D15  |                     | ±15                  | ±100                | 80%        |
| MSDWI03-48S033 | 48<br>(18 ~ 75)     | 3.3                  | 600                 | 75%        |
| MSDWI03-48S05  |                     | 5                    | 600                 | 78%        |
| MSDWI03-48S12  |                     | 12                   | 250                 | 80%        |
| MSDWI03-48S15  |                     | 15                   | 200                 | 80%        |
| MSDWI03-48S24  |                     | 24                   | 125                 | 80%        |
| MSDWI03-48D05  |                     | ±5                   | ±300                | 77%        |
| MSDWI03-48D12  |                     | ±12                  | ±125                | 80%        |
| MSDWI03-48D15  |                     | ±15                  | ±100                | 80%        |

Mechanical Dimensions

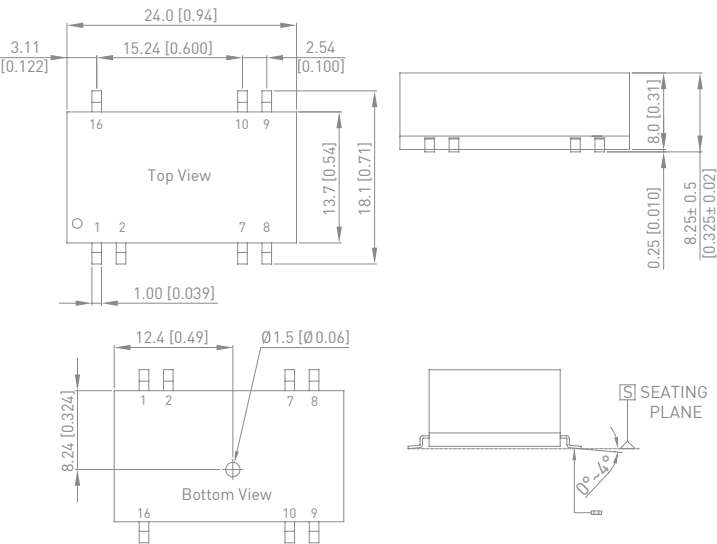

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | Remote On/Off | Remote On/Off |
| 7   | NC            | NC            |
| 8   | NC            | Common        |
| 9   | +Vout         | +Vout         |
| 10  | -Vout         | -Vout         |
| 16  | +Vin          | +Vin          |

NC: No Connection

# MSCWI03 Series | 3W



- Very Compact SMD Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection

- Remote On/Off Control
- EMI Emission EN 55032 Class A Approved
- Cleaning-washable Process

Available(option)


- Qualified for Lead-free Reflow Solder Process

According to IPC/JEDEC J-STD-020D.1

- Tape & Reel Package Available
  - UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MSCWI03-05S05 | 5<br>(4.5 - 12)     | 5                    | 600                 | 81%        |
| MSCWI03-05S12 |                     | 12                   | 250                 | 84%        |
| MSCWI03-05S15 |                     | 15                   | 200                 | 84%        |
| MSCWI03-05S24 |                     | 24                   | 125                 | 84%        |
| MSCWI03-05D12 |                     | ±12                  | ±125                | 83%        |
| MSCWI03-05D15 | 24<br>(9 - 36)      | ±15                  | ±100                | 83%        |
| MSCWI03-24S05 |                     | 5                    | 600                 | 80%        |
| MSCWI03-24S12 |                     | 12                   | 250                 | 85%        |
| MSCWI03-24S15 |                     | 15                   | 200                 | 85%        |
| MSCWI03-24S24 |                     | 24                   | 125                 | 85%        |
| MSCWI03-24D12 | 48<br>(18 - 75)     | ±12                  | ±125                | 84%        |
| MSCWI03-24D15 |                     | ±15                  | ±100                | 84%        |
| MSCWI03-48S05 |                     | 5                    | 600                 | 80%        |
| MSCWI03-48S12 |                     | 12                   | 250                 | 84%        |
| MSCWI03-48S15 |                     | 15                   | 200                 | 84%        |
| MSCWI03-48S24 |                     | 24                   | 125                 | 85%        |
| MSCWI03-48D12 |                     | ±12                  | ±125                | 83%        |
| MSCWI03-48D15 |                     | ±15                  | ±100                | 82%        |

## Mechanical Dimensions

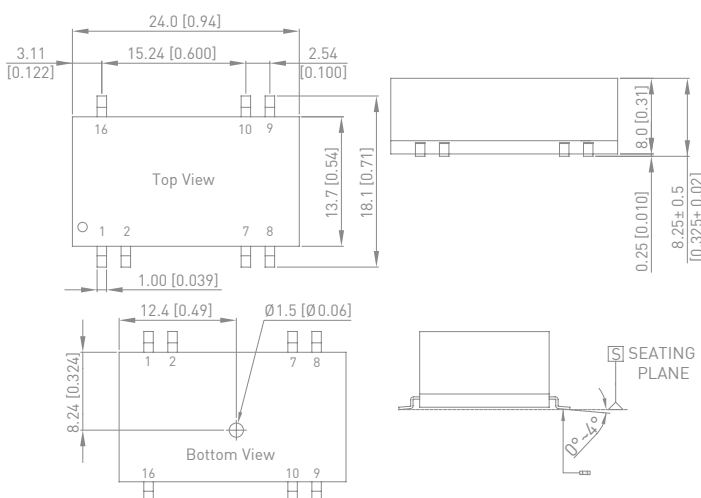

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | Remote On/Off | Remote On/Off |
| 6   | NC            | Common        |
| 7   | NC            | -Vout         |
| 8   | +Vout         | +Vout         |
| 9   | -Vout         | Common        |
| 14  | +Vin          | +Vin          |

NC= No Connection

MSGWI06 Series | 6W



- Industrial SMD Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Under-voltage, Overload and Short Circuit

Protection

- Remote On/Off Control
- Cleaning-washable Process

Available(option)

- Qualified for Lead-free Reflow Solder

Process


According to IPC/JEDEC J-STD-020D.1

- Tape & Reel Package Available
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1

Safety Approval

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MSGWI06-24S033 | 24<br>(9 - 36)      | 3.3                  | 1,450               | 76%        |
| MSGWI06-24S05  |                     | 5                    | 1,200               | 79%        |
| MSGWI06-24S12  |                     | 12                   | 500                 | 83%        |
| MSGWI06-24S15  |                     | 15                   | 400                 | 83%        |
| MSGWI06-24S24  |                     | 24                   | 250                 | 83%        |
| MSGWI06-24D05  |                     | ±5                   | ±600                | 82%        |
| MSGWI06-24D12  |                     | ±12                  | ±250                | 83%        |
| MSGWI06-24D15  |                     | ±15                  | ±200                | 83%        |
| MSGWI06-48S033 | 48<br>(18 - 75)     | 3.3                  | 1,450               | 76%        |
| MSGWI06-48S05  |                     | 5                    | 1,200               | 79%        |
| MSGWI06-48S12  |                     | 12                   | 500                 | 83%        |
| MSGWI06-48S15  |                     | 15                   | 400                 | 83%        |
| MSGWI06-48S24  |                     | 24                   | 250                 | 83%        |
| MSGWI06-48D05  |                     | ±5                   | ±600                | 82%        |
| MSGWI06-48D12  |                     | ±12                  | ±250                | 83%        |
| MSGWI06-48D15  |                     | ±15                  | ±200                | 83%        |

Mechanical Dimensions

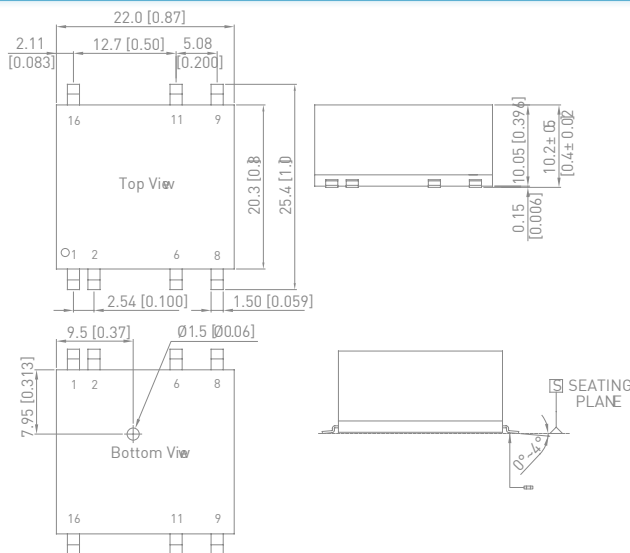

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | Remote On/Off | Remote On/Off |
| 2   | -Vin          | -Vin          |
| 6   | NC            | Common        |
| 8   | NC            | -Vout         |
| 9   | +Vout         | +Vout         |
| 11  | -Vout         | Common        |
| 16  | +Vin          | +Vin          |

NC: No Connection


MFSU01 Series | 1W



- Industrial Standard DIP-8 Package
- Unregulated Output Voltage
- I/O Isolation 1500VDC
- Wide Operating Temperature Range
- Short Circuit Protection

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MFSU01-05S05 | 5<br>(4.5 - 5.5)    | 5                    | 200                 | 80%        |
| MFSU01-05S12 |                     | 12                   | 84                  | 82%        |
| MFSU01-05S15 |                     | 15                   | 67                  | 83%        |
| MFSU01-12S05 | 12<br>(10.8 - 13.2) | 5                    | 200                 | 79%        |
| MFSU01-12S12 |                     | 12                   | 84                  | 81%        |
| MFSU01-12S15 |                     | 15                   | 67                  | 82%        |
| MFSU01-24S05 | 24<br>(21.6 - 26.4) | 5                    | 200                 | 78%        |
| MFSU01-24S12 |                     | 12                   | 84                  | 80%        |
| MFSU01-24S15 |                     | 15                   | 67                  | 81%        |

Mechanical Dimensions

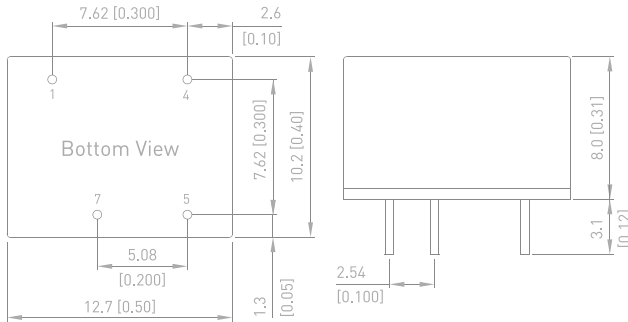

Pin Connections

| Pin | Function |
|-----|----------|
| 1   | -Vin     |
| 4   | +Vin     |
| 5   | +Vout    |
| 7   | -Vout    |


MFU100 Series | 1W



- Industrial Standard DIP-8 Package
- I/O Isolation 3000 VDC
- Wide Operating Temperature Range
- UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MFU102       | 5<br>(4.5 ~ 5.5)    | 5                    | 200                 | 69%        |
| MFU103       |                     | 9                    | 110                 | 76%        |
| MFU104       |                     | 12                   | 84                  | 77%        |
| MFU105       |                     | 15                   | 67                  | 78%        |
| MFU112       | 12<br>(10.8 ~ 13.2) | 5                    | 200                 | 71%        |
| MFU113       |                     | 9                    | 110                 | 77%        |
| MFU114       |                     | 12                   | 84                  | 79%        |
| MFU115       |                     | 15                   | 67                  | 79%        |
| MFU122       | 24<br>(21.6 ~ 26.4) | 5                    | 200                 | 70%        |
| MFU123       |                     | 9                    | 110                 | 76%        |
| MFU124       |                     | 12                   | 84                  | 79%        |
| MFU125       |                     | 15                   | 67                  | 79%        |

Mechanical Dimensions

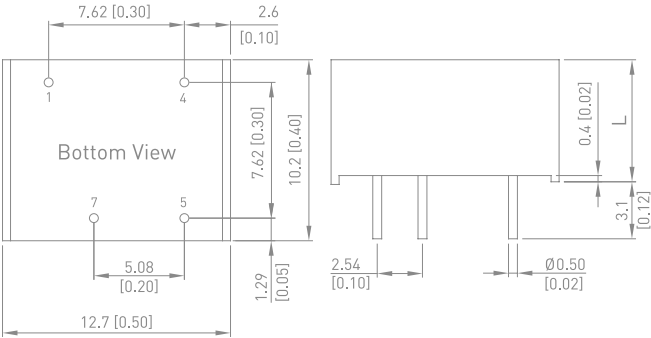

Pin Connections

| Pin | Function |
|-----|----------|
| 1   | -Vin     |
| 4   | +Vin     |
| 5   | +Vout    |
| 7   | -Vout    |

L:7.0 [0.28] for 5V & 12V Input Models  
L:8.0 [0.31] for 24V Input Models


# MFPU01H Series | 1W



- Industrial Standard DIP-8 Package
- Unregulated Output Voltage
- I/O Isolation 3000VDC
- Wide Operating Temperature Range
- Overload and Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number    | Input Voltage (VDC)  | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|-----------------|----------------------|----------------------|---------------------|------------|
| MFPU01-033S033H | 3.3<br>(2.97 - 3.63) | 3.3                  | 300                 | 75%        |
| MFPU01-033S05H  |                      | 5                    | 200                 | 79%        |
| MFPU01-033S12H  |                      | 12                   | 84                  | 80%        |
| MFPU01-033S15H  |                      | 15                   | 67                  | 81%        |
| MFPU01-033D05H  |                      | ±5                   | ±100                | 78%        |
| MFPU01-033D12H  |                      | ±12                  | ±42                 | 80%        |
| MFPU01-033D15H  |                      | ±15                  | ±33                 | 81%        |
| MFPU01-05S033H  | 5<br>(4.5 - 5.5)     | 3.3                  | 300                 | 77%        |
| MFPU01-05S05H   |                      | 5                    | 200                 | 80%        |
| MFPU01-05S12H   |                      | 12                   | 84                  | 82%        |
| MFPU01-05S15H   |                      | 15                   | 67                  | 83%        |
| MFPU01-05D05H   |                      | ±5                   | ±100                | 80%        |
| MFPU01-05D12H   |                      | ±12                  | ±42                 | 83%        |
| MFPU01-05D15H   |                      | ±15                  | ±33                 | 83%        |
| MFPU01-12S033H  | 12<br>(10.8 - 13.2)  | 3.3                  | 300                 | 77%        |
| MFPU01-12S05H   |                      | 5                    | 200                 | 79%        |
| MFPU01-12S12H   |                      | 12                   | 84                  | 81%        |
| MFPU01-12S15H   |                      | 15                   | 67                  | 82%        |
| MFPU01-12D05H   |                      | ±5                   | ±100                | 80%        |
| MFPU01-12D12H   |                      | ±12                  | ±42                 | 82%        |
| MFPU01-12D15H   |                      | ±15                  | ±33                 | 82%        |

## Mechanical Dimensions

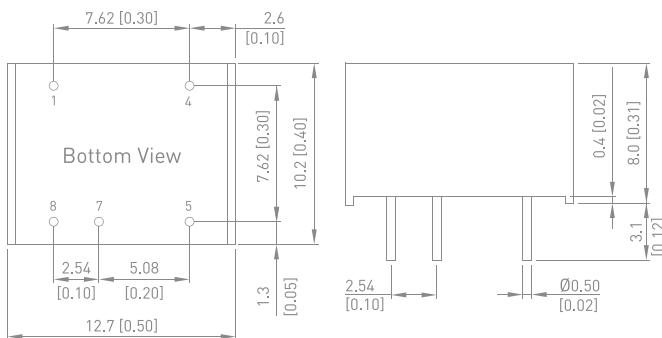

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 4   | +Vin   | +Vin   |
| 5   | +Vout  | +Vout  |
| 7   | -Vout  | Common |
| 8   | No Pin | -Vout  |


MFW02 Series | 2W



- Smallest Encapsulated 2W Converter
- Ultra-compact DIP-8 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MFW02-05S033 | 5<br>(4.5 - 10)     | 3.3                  | 400                 | 79%        |
| MFW02-05S05  |                     | 5                    | 400                 | 81%        |
| MFW02-05S12  |                     | 12                   | 167                 | 85%        |
| MFW02-05S15  |                     | 15                   | 134                 | 87%        |
| MFW02-05D05  |                     | ±5                   | ±200                | 83%        |
| MFW02-05D12  |                     | ±12                  | ±83                 | 85%        |
| MFW02-05D15  |                     | ±15                  | ±67                 | 85%        |
| MFW02-12S033 | 12<br>(9 - 18)      | 3.3                  | 400                 | 80%        |
| MFW02-12S05  |                     | 5                    | 400                 | 83%        |
| MFW02-12S12  |                     | 12                   | 167                 | 87%        |
| MFW02-12S15  |                     | 15                   | 134                 | 87%        |
| MFW02-12D05  |                     | ±5                   | ±200                | 84%        |
| MFW02-12D12  |                     | ±12                  | ±83                 | 86%        |
| MFW02-12D15  |                     | ±15                  | ±67                 | 86%        |
| MFW02-24S033 | 24<br>(18 - 36)     | 3.3                  | 400                 | 79%        |
| MFW02-24S05  |                     | 5                    | 400                 | 84%        |
| MFW02-24S12  |                     | 12                   | 167                 | 86%        |
| MFW02-24S15  |                     | 15                   | 134                 | 87%        |
| MFW02-24D05  |                     | ±5                   | ±200                | 84%        |
| MFW02-24D12  |                     | ±12                  | ±83                 | 86%        |
| MFW02-24D15  |                     | ±15                  | ±67                 | 86%        |
| MFW02-48S033 | 48<br>(36 - 75)     | 3.3                  | 400                 | 79%        |
| MFW02-48S05  |                     | 5                    | 400                 | 83%        |
| MFW02-48S12  |                     | 12                   | 167                 | 85%        |
| MFW02-48S15  |                     | 15                   | 134                 | 86%        |
| MFW02-48D05  |                     | ±5                   | ±200                | 82%        |
| MFW02-48D12  |                     | ±12                  | ±83                 | 84%        |
| MFW02-48D15  |                     | ±15                  | ±67                 | 84%        |

Mechanical Dimensions

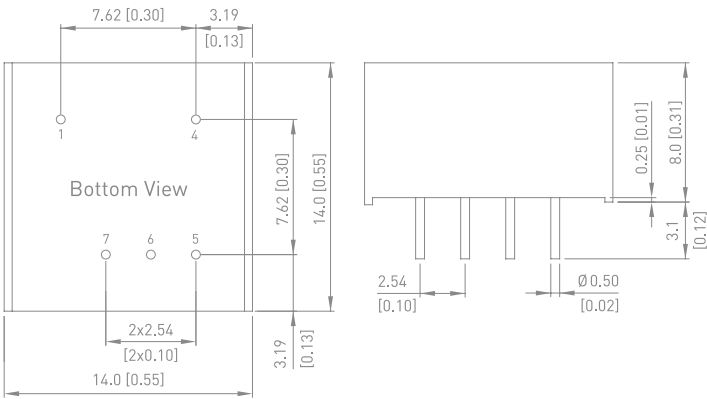

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 4   | +Vin   | +Vin   |
| 5   | +Vout  | +Vout  |
| 6   | No Pin | Common |
| 7   | -Vout  | -Vout  |


# MDW1000 Series 2W



- Industrial Standard DIP-16 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Short Circuit Protection
- UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MDW1011      | 5<br>(4.5 ~ 9)      | 3.3                  | 500                 | 70%        |
| MDW1012      |                     | 5                    | 400                 | 73%        |
| MDW1013      |                     | 12                   | 167                 | 75%        |
| MDW1014      |                     | 15                   | 134                 | 73%        |
| MDW1015      |                     | ±5                   | ±200                | 64%        |
| MDW1016      |                     | ±12                  | ±83                 | 69%        |
| MDW1017      |                     | ±15                  | ±67                 | 71%        |
| MDW1021      | 12<br>(9 ~ 18)      | 3.3                  | 500                 | 73%        |
| MDW1022      |                     | 5                    | 400                 | 77%        |
| MDW1023      |                     | 12                   | 167                 | 80%        |
| MDW1024      |                     | 15                   | 134                 | 80%        |
| MDW1025      |                     | ±5                   | ±200                | 73%        |
| MDW1026      |                     | ±12                  | ±83                 | 78%        |
| MDW1027      |                     | ±15                  | ±67                 | 78%        |
| MDW1031      | 24<br>(18 ~ 36)     | 3.3                  | 500                 | 72%        |
| MDW1032      |                     | 5                    | 400                 | 77%        |
| MDW1033      |                     | 12                   | 167                 | 80%        |
| MDW1034      |                     | 15                   | 134                 | 81%        |
| MDW1035      |                     | ±5                   | ±200                | 74%        |
| MDW1036      |                     | ±12                  | ±83                 | 78%        |
| MDW1037      |                     | ±15                  | ±67                 | 80%        |
| MDW1041      | 48<br>(36 ~ 75)     | 3.3                  | 500                 | 71%        |
| MDW1042      |                     | 5                    | 400                 | 73%        |
| MDW1043      |                     | 12                   | 167                 | 79%        |
| MDW1044      |                     | 15                   | 134                 | 79%        |
| MDW1045      |                     | ±5                   | ±200                | 71%        |
| MDW1046      |                     | ±12                  | ±83                 | 77%        |
| MDW1047      |                     | ±15                  | ±67                 | 77%        |

## Mechanical Dimensions

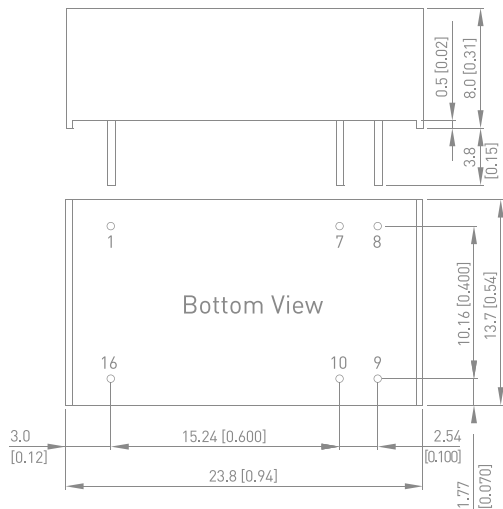

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC: No Connection


MFW03 Series | 3W



- Smallest Encapsulated 3W Converter
- Ultra-compact DIP-8 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MFW03-05S033 | 5<br>(4.5 - 10)     | 3.3                  | 600                 | 79%        |
| MFW03-05S05  |                     | 5                    | 600                 | 81%        |
| MFW03-05S12  |                     | 12                   | 250                 | 85%        |
| MFW03-05S15  |                     | 15                   | 200                 | 85%        |
| MFW03-05D05  |                     | ±5                   | ±300                | 82%        |
| MFW03-05D12  |                     | ±12                  | ±125                | 84%        |
| MFW03-05D15  |                     | ±15                  | ±100                | 85%        |
| MFW03-12S033 | 12<br>(9 - 18)      | 3.3                  | 600                 | 80%        |
| MFW03-12S05  |                     | 5                    | 600                 | 83%        |
| MFW03-12S12  |                     | 12                   | 250                 | 87%        |
| MFW03-12S15  |                     | 15                   | 200                 | 87%        |
| MFW03-12D05  |                     | ±5                   | ±300                | 84%        |
| MFW03-12D12  |                     | ±12                  | ±125                | 86%        |
| MFW03-12D15  |                     | ±15                  | ±100                | 87%        |
| MFW03-24S033 | 24<br>(18 - 36)     | 3.3                  | 600                 | 80%        |
| MFW03-24S05  |                     | 5                    | 600                 | 83%        |
| MFW03-24S12  |                     | 12                   | 250                 | 87%        |
| MFW03-24S15  |                     | 15                   | 200                 | 87%        |
| MFW03-24D05  |                     | ±5                   | ±300                | 84%        |
| MFW03-24D12  |                     | ±12                  | ±125                | 86%        |
| MFW03-24D15  |                     | ±15                  | ±100                | 87%        |
| MFW03-48S033 | 48<br>(36 - 75)     | 3.3                  | 600                 | 79%        |
| MFW03-48S05  |                     | 5                    | 600                 | 82%        |
| MFW03-48S12  |                     | 12                   | 250                 | 86%        |
| MFW03-48S15  |                     | 15                   | 200                 | 86%        |
| MFW03-48D05  |                     | ±5                   | ±300                | 82%        |
| MFW03-48D12  |                     | ±12                  | ±125                | 85%        |
| MFW03-48D15  |                     | ±15                  | ±100                | 85%        |


Mechanical Dimensions

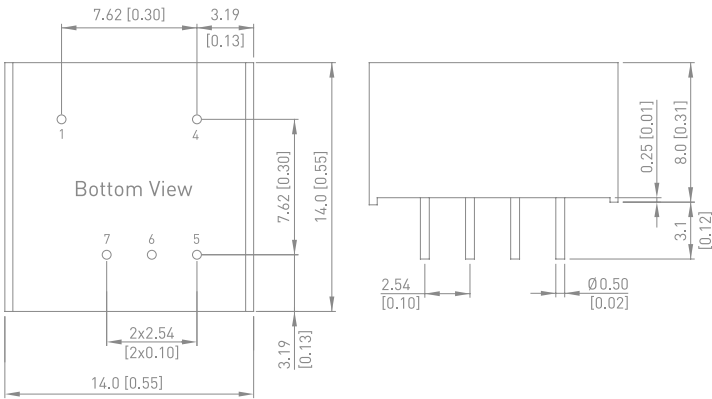

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 4   | +Vin   | +Vin   |
| 5   | +Vout  | +Vout  |
| 6   | No Pin | Common |
| 7   | -Vout  | -Vout  |


# MDWI03 Series | 3W



- Compact DIP-16 Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Under-voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MDWI03-24S033 | 24<br>(9 - 36)      | 3.3                  | 600                 | 75%        |
| MDWI03-24S05  |                     | 5                    | 600                 | 78%        |
| MDWI03-24S12  |                     | 12                   | 250                 | 80%        |
| MDWI03-24S15  |                     | 15                   | 200                 | 80%        |
| MDWI03-24S24  |                     | 24                   | 125                 | 80%        |
| MDWI03-24D05  |                     | ±5                   | ±300                | 77%        |
| MDWI03-24D12  |                     | ±12                  | ±125                | 80%        |
| MDWI03-24D15  |                     | ±15                  | ±100                | 80%        |
| MDWI03-48S033 | 48<br>(18 - 75)     | 3.3                  | 600                 | 75%        |
| MDWI03-48S05  |                     | 5                    | 600                 | 78%        |
| MDWI03-48S12  |                     | 12                   | 250                 | 80%        |
| MDWI03-48S15  |                     | 15                   | 200                 | 80%        |
| MDWI03-48S24  |                     | 24                   | 125                 | 80%        |
| MDWI03-48D05  |                     | ±5                   | ±300                | 77%        |
| MDWI03-48D12  |                     | ±12                  | ±125                | 80%        |
| MDWI03-48D15  |                     | ±15                  | ±100                | 80%        |

## Mechanical Dimensions

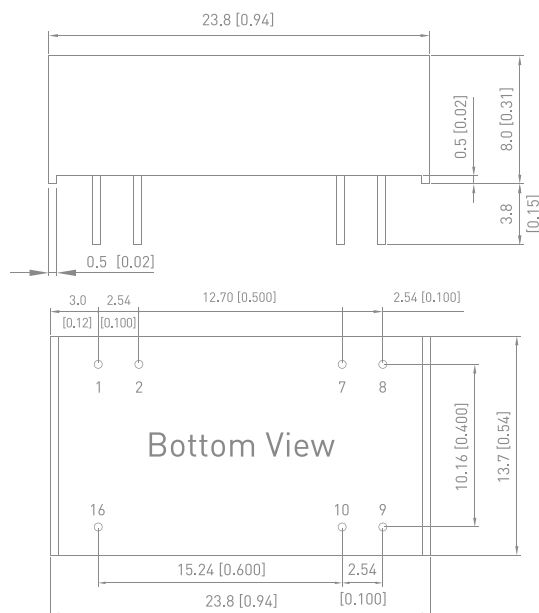

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | -Vin          | -Vin          |
| 2   | Remote On/Off | Remote On/Off |
| 7   | NC            | NC            |
| 8   | NC            | Common        |
| 9   | +Vout         | +Vout         |
| 10  | -Vout         | -Vout         |
| 16  | +Vin          | +Vin          |


MIAR03 Series 3W



- Industrial Standard DIP-24 Package
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MIAR03-05S05 | 5 ±10%              | 5                    | 600                 | 70%        |
| MIAR03-05S12 |                     | 12                   | 250                 | 78%        |
| MIAR03-05S15 |                     | 15                   | 200                 | 78%        |
| MIAR03-05D12 |                     | ±12                  | ±125                | 78%        |
| MIAR03-05D15 |                     | ±15                  | ±100                | 78%        |
| MIAR03-12S05 | 12 ±10%             | 5                    | 600                 | 74%        |
| MIAR03-12S12 |                     | 12                   | 250                 | 80%        |
| MIAR03-12S15 |                     | 15                   | 200                 | 80%        |
| MIAR03-12D12 |                     | ±12                  | ±125                | 81%        |
| MIAR03-12D15 |                     | ±15                  | ±100                | 82%        |
| MIAR03-24S05 | 24 ±10%             | 5                    | 600                 | 75%        |
| MIAR03-24S12 |                     | 12                   | 250                 | 80%        |
| MIAR03-24S15 |                     | 15                   | 200                 | 80%        |
| MIAR03-24D12 |                     | ±12                  | ±125                | 81%        |
| MIAR03-24D15 |                     | ±15                  | ±100                | 82%        |

Mechanical Dimensions

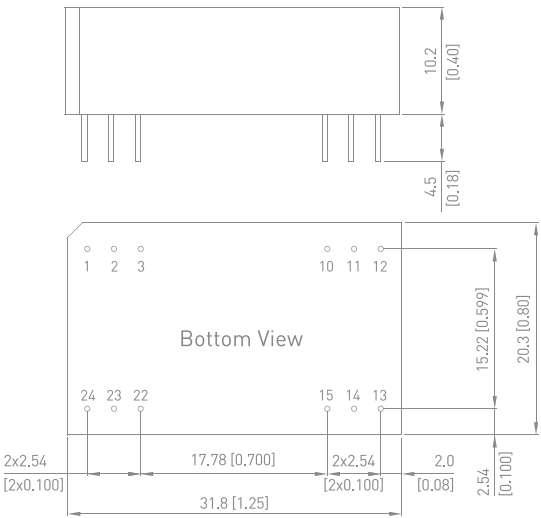

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | NC     | -Vout  |
| 3   | NC     | Common |
| 10  | -Vout  | Common |
| 11  | +Vout  | +Vout  |
| 12  | -Vin   | -Vin   |
| 13  | -Vin   | -Vin   |
| 14  | +Vout  | +Vout  |
| 15  | -Vout  | Common |
| 22  | NC     | Common |
| 23  | NC     | -Vout  |
| 24  | +Vin   | +Vin   |


# MIW1100 Series | 3W



- Industrial Standard DIP-24 Package
- Wide 2:1 & 3:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Overload and Short Circuit Protection
- UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MIW1111      | 5<br>(4.5 ~ 9)      | 5                    | 600                 | 70%        |
| MIW1112      |                     | 12                   | 250                 | 74%        |
| MIW1113      |                     | 15                   | 200                 | 74%        |
| MIW1114      |                     | ±12                  | ±125                | 74%        |
| MIW1115      |                     | ±15                  | ±100                | 74%        |
| MIW1121      | 12<br>(9 ~ 18)      | 5                    | 600                 | 76%        |
| MIW1122      |                     | 12                   | 250                 | 80%        |
| MIW1123      |                     | 15                   | 200                 | 80%        |
| MIW1124      |                     | ±12                  | ±125                | 80%        |
| MIW1125      |                     | ±15                  | ±100                | 80%        |
| MIW1131      | 24<br>(18 ~ 36)     | 5                    | 600                 | 77%        |
| MIW1132      |                     | 12                   | 250                 | 81%        |
| MIW1133      |                     | 15                   | 200                 | 81%        |
| MIW1134      |                     | ±12                  | ±125                | 81%        |
| MIW1135      |                     | ±15                  | ±100                | 81%        |
| MIW1141      | 48<br>(36 ~ 75)     | 5                    | 600                 | 77%        |
| MIW1142      |                     | 12                   | 250                 | 81%        |
| MIW1143      |                     | 15                   | 200                 | 81%        |
| MIW1144      |                     | ±12                  | ±125                | 81%        |
| MIW1145      |                     | ±15                  | ±100                | 81%        |
| MIW1151      | 20<br>(10 ~ 30)     | 5                    | 600                 | 80%        |
| MIW1152      |                     | 12                   | 250                 | 80%        |
| MIW1153      |                     | 15                   | 200                 | 80%        |
| MIW1154      |                     | ±12                  | ±125                | 80%        |
| MIW1155      |                     | ±15                  | ±100                | 80%        |

## Mechanical Dimensions

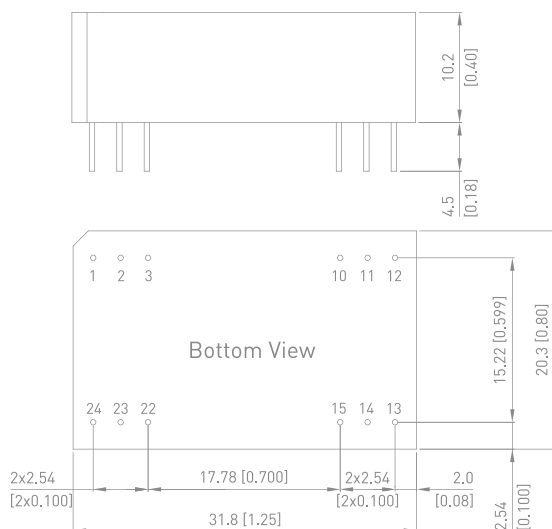

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | NC     | -Vout  |
| 3   | NC     | Common |
| 10  | -Vout  | Common |
| 11  | +Vout  | +Vout  |
| 12  | -Vin   | -Vin   |
| 13  | -Vin   | -Vin   |
| 14  | +Vout  | +Vout  |
| 15  | -Vout  | Common |
| 22  | NC     | Common |
| 23  | NC     | -Vout  |
| 24  | +Vin   | +Vin   |

NC: No Connection


# MIW03 Series | 3W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC (opt. 3000VDC)
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- EMI Emission EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MIW03-05S033 | 5<br>(4.5 - 9)      | 3.3                  | 750                 | 77%        |
| MIW03-05S05  |                     | 5                    | 600                 | 80%        |
| MIW03-05S12  |                     | 12                   | 250                 | 82%        |
| MIW03-05S15  |                     | 15                   | 200                 | 82%        |
| MIW03-05S24  |                     | 24                   | 125                 | 81%        |
| MIW03-05D05  |                     | ±5                   | ±250                | 80%        |
| MIW03-05D12  |                     | ±12                  | ±125                | 82%        |
| MIW03-05D15  |                     | ±15                  | ±100                | 82%        |
| MIW03-12S033 | 12<br>(9 - 18)      | 3.3                  | 750                 | 79%        |
| MIW03-12S05  |                     | 5                    | 600                 | 81%        |
| MIW03-12S12  |                     | 12                   | 250                 | 85%        |
| MIW03-12S15  |                     | 15                   | 200                 | 85%        |
| MIW03-12S24  |                     | 24                   | 125                 | 84%        |
| MIW03-12D05  |                     | ±5                   | ±250                | 80%        |
| MIW03-12D12  |                     | ±12                  | ±125                | 84%        |
| MIW03-12D15  |                     | ±15                  | ±100                | 84%        |
| MIW03-24S033 | 24<br>(18 - 36)     | 3.3                  | 750                 | 79%        |
| MIW03-24S05  |                     | 5                    | 600                 | 81%        |
| MIW03-24S12  |                     | 12                   | 250                 | 85%        |
| MIW03-24S15  |                     | 15                   | 200                 | 85%        |
| MIW03-24S24  |                     | 24                   | 125                 | 84%        |
| MIW03-24D05  |                     | ±5                   | ±250                | 80%        |
| MIW03-24D12  |                     | ±12                  | ±125                | 84%        |
| MIW03-24D15  |                     | ±15                  | ±100                | 84%        |
| MIW03-48S033 | 48<br>(36 - 75)     | 3.3                  | 750                 | 79%        |
| MIW03-48S05  |                     | 5                    | 600                 | 81%        |
| MIW03-48S12  |                     | 12                   | 250                 | 85%        |
| MIW03-48S15  |                     | 15                   | 200                 | 85%        |
| MIW03-48S24  |                     | 24                   | 125                 | 84%        |
| MIW03-48D05  |                     | ±5                   | ±250                | 80%        |
| MIW03-48D12  |                     | ±12                  | ±125                | 84%        |
| MIW03-48D15  |                     | ±15                  | ±100                | 84%        |

## Mechanical Dimensions

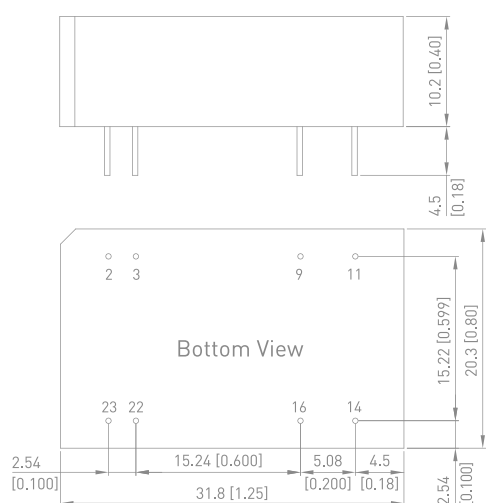

## Pin Connections

| Pin   | Single | Dual   |
|-------|--------|--------|
| 2,3   | -Vin   | -Vin   |
| 9     | No Pin | Common |
| 11    | NC     | -Vout  |
| 14    | +Vout  | +Vout  |
| 16    | -Vout  | Common |
| 22,23 | +Vin   | +Vin   |

NC: No Connection


# MIWI03 Series | 3W



- Industrial Standard DIP-24 Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC (opt. 3000VDC)
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- EMI Emission EN 55032 Class A
- Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MIWI03-24S033 | 24<br>(9 - 36)      | 3.3                  | 750                 | 77%        |
| MIWI03-24S05  |                     | 5                    | 600                 | 79%        |
| MIWI03-24S12  |                     | 12                   | 250                 | 82%        |
| MIWI03-24S15  |                     | 15                   | 200                 | 83%        |
| MIWI03-24S24  |                     | 24                   | 125                 | 81%        |
| MIWI03-24D05  |                     | ±5                   | ±300                | 80%        |
| MIWI03-24D12  |                     | ±12                  | ±125                | 82%        |
| MIWI03-24D15  |                     | ±15                  | ±100                | 82%        |
| MIWI03-48S033 | 48<br>(18 - 75)     | 3.3                  | 750                 | 77%        |
| MIWI03-48S05  |                     | 5                    | 600                 | 80%        |
| MIWI03-48S12  |                     | 12                   | 250                 | 83%        |
| MIWI03-48S15  |                     | 15                   | 200                 | 84%        |
| MIWI03-48S24  |                     | 24                   | 125                 | 82%        |
| MIWI03-48D05  |                     | ±5                   | ±300                | 80%        |
| MIWI03-48D12  |                     | ±12                  | ±125                | 82%        |
| MIWI03-48D15  |                     | ±15                  | ±100                | 82%        |

## Mechanical Dimensions

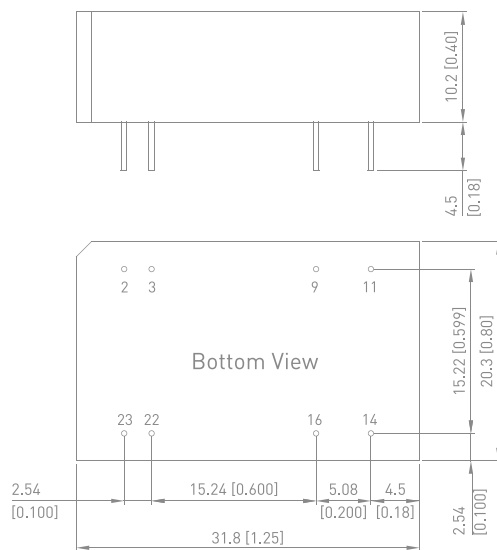


MIW06 Series | 6W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC (opt. 3000VDC)
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MIW06-12S033 | 12<br>(9 - 18)      | 3.3                  | 1,200               | 75%        |
| MIW06-12S05  |                     | 5                    | 1,200               | 78%        |
| MIW06-12S12  |                     | 12                   | 500                 | 82%        |
| MIW06-12S15  |                     | 15                   | 400                 | 82%        |
| MIW06-12S24  |                     | 24                   | 250                 | 84%        |
| MIW06-12D05  |                     | ±5                   | ±500                | 78%        |
| MIW06-12D12  | 24<br>(18 - 36)     | ±12                  | ±250                | 82%        |
| MIW06-12D15  |                     | ±15                  | ±200                | 82%        |
| MIW06-24S033 |                     | 3.3                  | 1,200               | 77%        |
| MIW06-24S05  |                     | 5                    | 1,200               | 80%        |
| MIW06-24S12  |                     | 12                   | 500                 | 84%        |
| MIW06-24S15  |                     | 15                   | 400                 | 84%        |
| MIW06-24S24  |                     | 24                   | 250                 | 84%        |
| MIW06-24D05  | 48<br>(36 - 75)     | ±5                   | ±500                | 80%        |
| MIW06-24D12  |                     | ±12                  | ±250                | 84%        |
| MIW06-24D15  |                     | ±15                  | ±200                | 84%        |
| MIW06-48S033 |                     | 3.3                  | 1,200               | 77%        |
| MIW06-48S05  |                     | 5                    | 1,200               | 80%        |
| MIW06-48S12  |                     | 12                   | 500                 | 84%        |
| MIW06-48S15  |                     | 15                   | 400                 | 84%        |
| MIW06-48S24  |                     | 24                   | 250                 | 84%        |
| MIW06-48D05  |                     | ±5                   | ±500                | 80%        |
| MIW06-48D12  |                     | ±12                  | ±250                | 84%        |
| MIW06-48D15  |                     | ±15                  | ±200                | 84%        |

Mechanical Dimensions

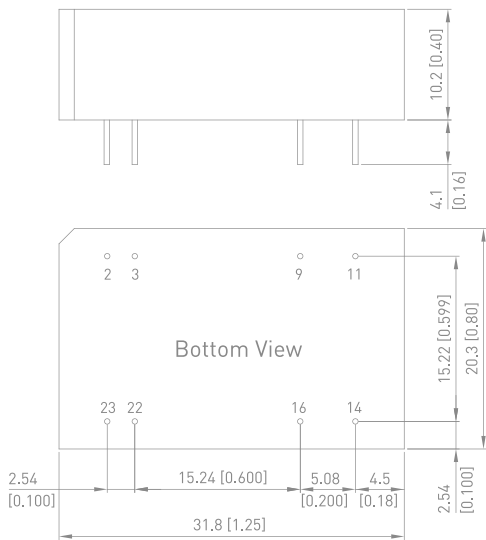

Pin Connections

| Pin   | Single | Dual   |
|-------|--------|--------|
| 2,3   | -Vin   | -Vin   |
| 9     | No Pin | Common |
| 11    | NC     | -Vout  |
| 14    | +Vout  | +Vout  |
| 16    | -Vout  | Common |
| 22,23 | +Vin   | +Vin   |

NC= No Connection


# MIWI06 Series | 6W



- Industrial Standard DIP-24 Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC (opt. 3000VDC)
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MIWI06-24S033 | 24<br>(9 - 36)      | 3.3                  | 1,200               | 77%        |
| MIWI06-24S05  |                     | 5                    | 1,200               | 80%        |
| MIWI06-24S12  |                     | 12                   | 500                 | 84%        |
| MIWI06-24S15  |                     | 15                   | 400                 | 84%        |
| MIWI06-24S24  |                     | 24                   | 250                 | 84%        |
| MIWI06-24D05  |                     | ±5                   | ±500                | 80%        |
| MIWI06-24D12  |                     | ±12                  | ±250                | 84%        |
| MIWI06-24D15  |                     | ±15                  | ±200                | 84%        |
| MIWI06-48S033 | 48<br>(18 - 75)     | 3.3                  | 1,200               | 77%        |
| MIWI06-48S05  |                     | 5                    | 1,200               | 80%        |
| MIWI06-48S12  |                     | 12                   | 500                 | 84%        |
| MIWI06-48S15  |                     | 15                   | 400                 | 84%        |
| MIWI06-48S24  |                     | 24                   | 250                 | 84%        |
| MIWI06-48D05  |                     | ±5                   | ±500                | 80%        |
| MIWI06-48D12  |                     | ±12                  | ±250                | 84%        |
| MIWI06-48D15  |                     | ±15                  | ±200                | 84%        |

## Mechanical Dimensions

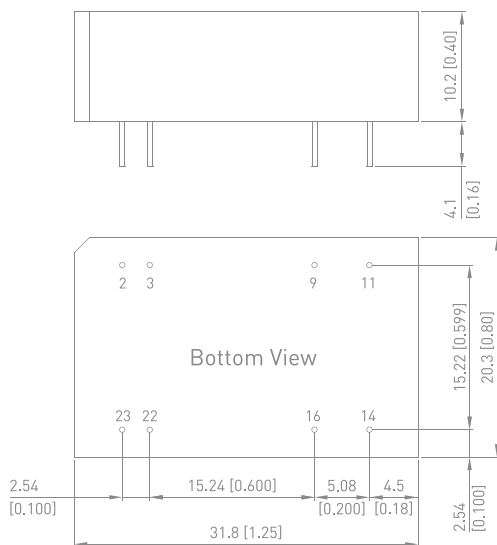

## Pin Connections

| Pin   | Single | Dual   |
|-------|--------|--------|
| 2,3   | -Vin   | -Vin   |
| 9     | No Pin | Common |
| 11    | NC     | -Vout  |
| 14    | +Vout  | +Vout  |
| 16    | -Vout  | Common |
| 22,23 | +Vin   | +Vin   |

NC: No Connection


MDWI06 Series | 6W



- Smallest Encapsulated 6W Converter
- Industrial Standard DIP-16 Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MDWI06-24S033 | 24<br>(9 - 36)      | 3.3                  | 1,500               | 78%        |
| MDWI06-24S05  |                     | 5                    | 1,200               | 82%        |
| MDWI06-24S12  |                     | 12                   | 500                 | 86%        |
| MDWI06-24S15  |                     | 15                   | 400                 | 86%        |
| MDWI06-24S24  |                     | 24                   | 250                 | 87%        |
| MDWI06-24D12  |                     | ±12                  | ±250                | 86%        |
| MDWI06-24D15  |                     | ±15                  | ±200                | 87%        |
| MDWI06-48S033 | 48<br>(18 - 75)     | 3.3                  | 1,500               | 78%        |
| MDWI06-48S05  |                     | 5                    | 1,200               | 82%        |
| MDWI06-48S12  |                     | 12                   | 500                 | 86%        |
| MDWI06-48S15  |                     | 15                   | 400                 | 86%        |
| MDWI06-48S24  |                     | 24                   | 250                 | 87%        |
| MDWI06-48D12  |                     | ±12                  | ±250                | 87%        |
| MDWI06-48D15  |                     | ±15                  | ±200                | 87%        |

Mechanical Dimensions

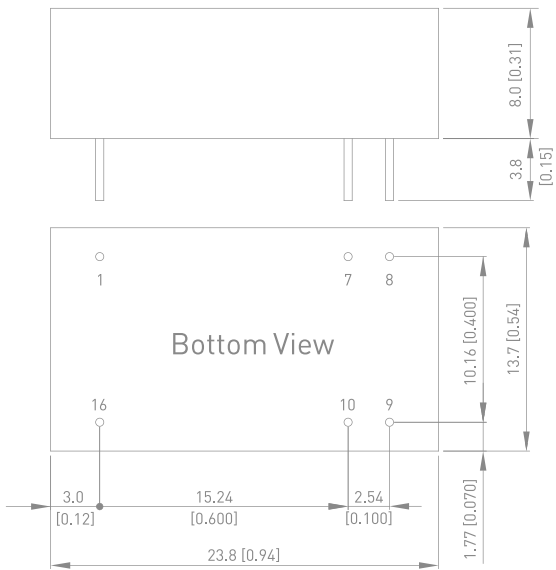

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC: No Connection


# MDW08 Series | 8W



- Smallest Encapsulated 8W Converter
- Industrial Standard DIP-16 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MDW08-12S033 | 12<br>(9 - 18)      | 3.3                  | 1,600               | 78%        |
| MDW08-12S05  |                     | 5                    | 1,600               | 81%        |
| MDW08-12S12  |                     | 12                   | 665                 | 84%        |
| MDW08-12S15  |                     | 15                   | 535                 | 84%        |
| MDW08-12S24  |                     | 24                   | 335                 | 85%        |
| MDW08-12D12  |                     | ±12                  | ±335                | 85%        |
| MDW08-12D15  |                     | ±15                  | ±265                | 84%        |
| MDW08-24S033 | 24<br>(18 - 36)     | 3.3                  | 1,600               | 78%        |
| MDW08-24S05  |                     | 5                    | 1,600               | 82%        |
| MDW08-24S12  |                     | 12                   | 665                 | 85%        |
| MDW08-24S15  |                     | 15                   | 535                 | 85%        |
| MDW08-24S24  |                     | 24                   | 335                 | 86%        |
| MDW08-24D12  |                     | ±12                  | ±335                | 85%        |
| MDW08-24D15  |                     | ±15                  | ±265                | 86%        |
| MDW08-48S033 | 48<br>(36 - 75)     | 3.3                  | 1,600               | 78%        |
| MDW08-48S05  |                     | 5                    | 1,600               | 81%        |
| MDW08-48S12  |                     | 12                   | 665                 | 85%        |
| MDW08-48S15  |                     | 15                   | 535                 | 85%        |
| MDW08-48S24  |                     | 24                   | 335                 | 86%        |
| MDW08-48D12  |                     | ±12                  | ±335                | 86%        |
| MDW08-48D15  |                     | ±15                  | ±265                | 86%        |

## Mechanical Dimensions

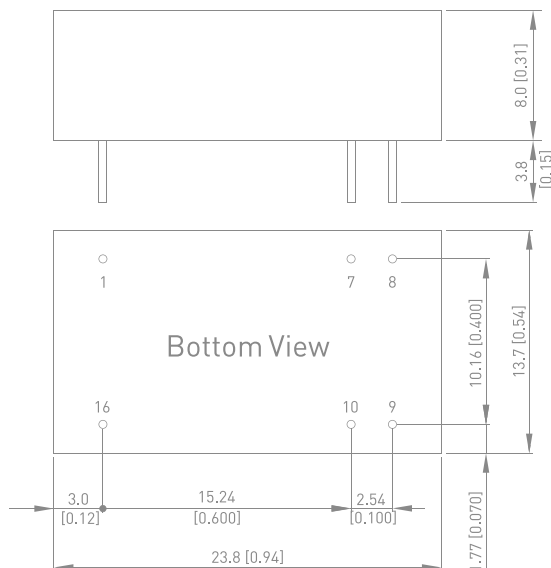

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC= No Connection


MDWI08 Series | 8W



- Smallest Encapsulated 8W Converter
- Industrial Standard DIP-16 Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MDWI08-24S033 | 24<br>(9 - 36)      | 3.3                  | 2,000               | 78%        |
| MDWI08-24S05  |                     | 5                    | 1,600               | 82%        |
| MDWI08-24S12  |                     | 12                   | 665                 | 85%        |
| MDWI08-24S15  |                     | 15                   | 535                 | 85%        |
| MDWI08-24S24  |                     | 24                   | 335                 | 86%        |
| MDWI08-24D12  |                     | ±12                  | ±335                | 85%        |
| MDWI08-24D15  |                     | ±15                  | ±265                | 86%        |
| MDWI08-48S033 | 48<br>(18 - 75)     | 3.3                  | 2,000               | 78%        |
| MDWI08-48S05  |                     | 5                    | 1,600               | 81%        |
| MDWI08-48S12  |                     | 12                   | 665                 | 85%        |
| MDWI08-48S15  |                     | 15                   | 535                 | 85%        |
| MDWI08-48S24  |                     | 24                   | 335                 | 86%        |
| MDWI08-48D12  |                     | ±12                  | ±335                | 86%        |
| MDWI08-48D15  |                     | ±15                  | ±265                | 86%        |

Mechanical Dimensions

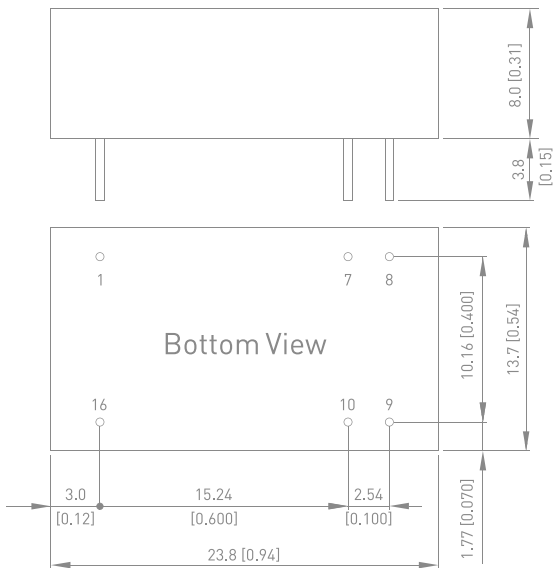

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC: No Connection

# MDW10 Series | 10W



- Smallest Encapsulated 10W Converter
- Industrial Standard DIP-16 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit

## Protection


- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A & FCC Level

## A Approved

- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MDW10-12S033 | 12<br>(9 - 18)      | 3.3                  | 2,700               | 79%        |
| MDW10-12S05  |                     | 5                    | 2,000               | 82%        |
| MDW10-12S051 |                     | 5.1                  | 2,000               | 82%        |
| MDW10-12S12  |                     | 12                   | 833                 | 86%        |
| MDW10-12S15  |                     | 15                   | 666                 | 87%        |
| MDW10-12S24  |                     | 24                   | 416                 | 87%        |
| MDW10-12D12  |                     | ±12                  | ±416                | 86%        |
| MDW10-12D15  |                     | ±15                  | ±333                | 86%        |
| MDW10-24S033 | 24<br>(18 - 36)     | 3.3                  | 2,700               | 80%        |
| MDW10-24S05  |                     | 5                    | 2,000               | 83%        |
| MDW10-24S051 |                     | 5.1                  | 2,000               | 83%        |
| MDW10-24S12  |                     | 12                   | 833                 | 87%        |
| MDW10-24S15  |                     | 15                   | 666                 | 88%        |
| MDW10-24S24  |                     | 24                   | 416                 | 88%        |
| MDW10-24D12  |                     | ±12                  | ±416                | 87%        |
| MDW10-24D15  |                     | ±15                  | ±333                | 87%        |
| MDW10-48S033 | 48<br>(36 - 75)     | 3.3                  | 2,700               | 80%        |
| MDW10-48S05  |                     | 5                    | 2,000               | 83%        |
| MDW10-48S051 |                     | 5.1                  | 2,000               | 83%        |
| MDW10-48S12  |                     | 12                   | 833                 | 87%        |
| MDW10-48S15  |                     | 15                   | 666                 | 88%        |
| MDW10-48S24  |                     | 24                   | 416                 | 88%        |
| MDW10-48D12  |                     | ±12                  | ±416                | 87%        |
| MDW10-48D15  |                     | ±15                  | ±333                | 87%        |

## Mechanical Dimensions

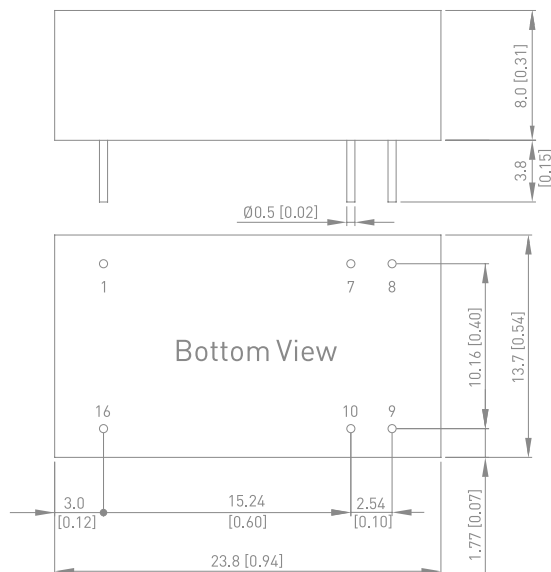

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC= No Connection


MDWI10 Series | 10W



- Smallest Encapsulated 10W Converter
  - Industrial Standard DIP-16 Package
  - Ultra-wide 4:1 Input Voltage Range
  - Fully Regulated Output Voltage
  - I/O Isolation 1500VDC
  - Wide Operating Temperature Range
  - Low No Load Power Consumption
  - No Min. Load Requirement
  - Under-voltage, Overload and Short Circuit Protection
  - Shielded Metal Case with Insulated Baseplate
  - Conducted EMI EN 55032 Class A Approved
  - UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MDWI10-24S033 | 24<br>(9 - 36)      | 3.3                  | 2,700               | 80%        |
| MDWI10-24S05  |                     | 5                    | 2,000               | 83%        |
| MDWI10-24S051 |                     | 5.1                  | 2,000               | 83%        |
| MDWI10-24S12  |                     | 12                   | 833                 | 87%        |
| MDWI10-24S15  |                     | 15                   | 666                 | 88%        |
| MDWI10-24S24  |                     | 24                   | 416                 | 88%        |
| MDWI10-24D12  |                     | ±12                  | ±416                | 87%        |
| MDWI10-24D15  |                     | ±15                  | ±333                | 87%        |
| MDWI10-48S033 | 48<br>(18 - 75)     | 3.3                  | 2,700               | 80%        |
| MDWI10-48S05  |                     | 5                    | 2,000               | 83%        |
| MDWI10-48S051 |                     | 5.1                  | 2,000               | 83%        |
| MDWI10-48S12  |                     | 12                   | 833                 | 87%        |
| MDWI10-48S15  |                     | 15                   | 666                 | 88%        |
| MDWI10-48S24  |                     | 24                   | 416                 | 88%        |
| MDWI10-48D12  |                     | ±12                  | ±416                | 87%        |
| MDWI10-48D15  |                     | ±15                  | ±333                | 87%        |

Mechanical Dimensions

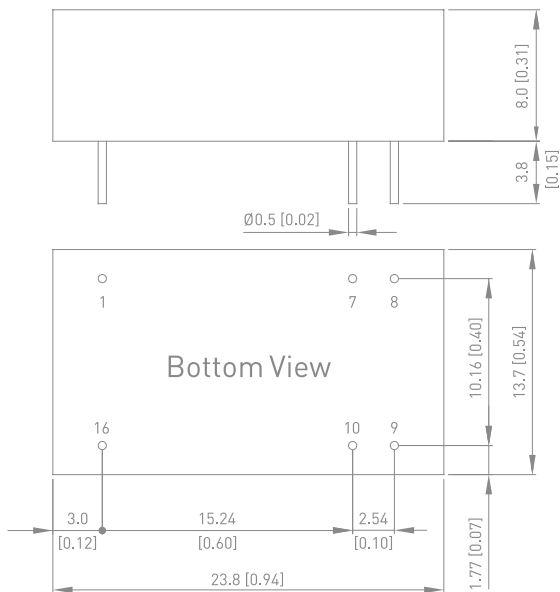

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC: No Connection


# MIW10 Series | 10W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-Voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- Shielded Metal Case with Insulated Baseplate
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MIW10-12S033 | 12<br>(9 - 18)      | 3.3                  | 2,700               | 86%        |
| MIW10-12S05  |                     | 5                    | 2,000               | 85%        |
| MIW10-12S051 |                     | 5.1                  | 2,000               | 85%        |
| MIW10-12S12  |                     | 12                   | 833                 | 88%        |
| MIW10-12S15  |                     | 15                   | 666                 | 89%        |
| MIW10-12D12  |                     | ±12                  | ±416                | 88%        |
| MIW10-12D15  |                     | ±15                  | ±333                | 89%        |
| MIW10-24S033 | 24<br>(18 - 36)     | 3.3                  | 2,700               | 86%        |
| MIW10-24S05  |                     | 5                    | 2,000               | 85%        |
| MIW10-24S051 |                     | 5.1                  | 2,000               | 85%        |
| MIW10-24S12  |                     | 12                   | 833                 | 89%        |
| MIW10-24S15  |                     | 15                   | 666                 | 89%        |
| MIW10-24D12  |                     | ±12                  | ±416                | 88%        |
| MIW10-24D15  |                     | ±15                  | ±333                | 89%        |
| MIW10-48S033 | 48<br>(36 - 75)     | 3.3                  | 2,700               | 86%        |
| MIW10-48S05  |                     | 5                    | 2,000               | 85%        |
| MIW10-48S051 |                     | 5.1                  | 2,000               | 85%        |
| MIW10-48S12  |                     | 12                   | 833                 | 87%        |
| MIW10-48S15  |                     | 15                   | 666                 | 88%        |
| MIW10-48D12  |                     | ±12                  | ±416                | 87%        |
| MIW10-48D15  |                     | ±15                  | ±333                | 88%        |

## Mechanical Dimensions

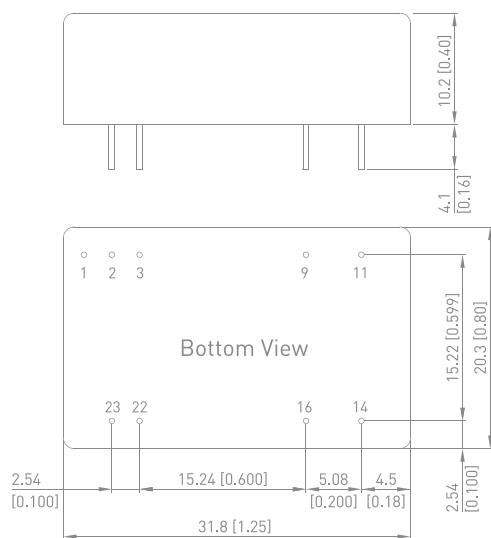

## Pin Connections

| Pin   | Single        | Dual          |
|-------|---------------|---------------|
| 1     | Remote On/Off | Remote On/Off |
| 2,3   | -Vin          | -Vin          |
| 9     | No Pin        | Common        |
| 11    | NC            | -Vout         |
| 14    | +Vout         | +Vout         |
| 16    | -Vout         | Common        |
| 22,23 | +Vin          | +Vin          |


NC= No Connection



- ## Baseplate

NC: No Connection

## Pin Connections

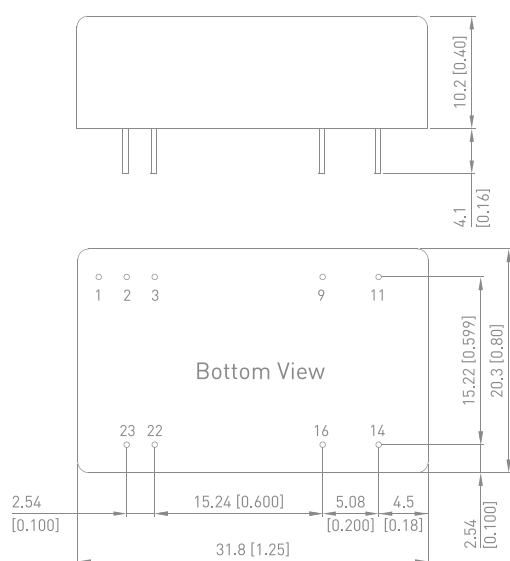

| Pin   | Single        | Dual          |
|-------|---------------|---------------|
| 1     | Remote On/Off | Remote On/Off |
| 2,3   | -Vin          | -Vin          |
| 9     | No Pin        | Common        |
| 11    | NC            | -Vout         |
| 14    | +Vout         | +Vout         |
| 16    | -Vout         | Common        |
| 22,23 | +Vin          | +Vin          |

NC: No Connection

# MDW12 Series | 12W



- Smallest Encapsulated 12W Converter
- Industrial Standard DIP-16 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit


## Protection

- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE

## Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MDW12-12S05  | 12<br>(9 - 18)      | 5                    | 2,400               | 83%        |
| MDW12-12S051 |                     | 5.1                  | 2,400               | 83%        |
| MDW12-12S12  |                     | 12                   | 1,000               | 87%        |
| MDW12-12S15  |                     | 15                   | 800                 | 88%        |
| MDW12-12S24  |                     | 24                   | 500                 | 88%        |
| MDW12-12D12  |                     | ±12                  | ±500                | 87%        |
| MDW12-12D15  |                     | ±15                  | ±400                | 87%        |
| MDW12-24S05  | 24<br>(18 - 36)     | 5                    | 2,400               | 83%        |
| MDW12-24S051 |                     | 5.1                  | 2,400               | 83%        |
| MDW12-24S12  |                     | 12                   | 1,000               | 87%        |
| MDW12-24S15  |                     | 15                   | 800                 | 88%        |
| MDW12-24S24  |                     | 24                   | 500                 | 88%        |
| MDW12-24D12  |                     | ±12                  | ±500                | 87%        |
| MDW12-24D15  |                     | ±15                  | ±400                | 87%        |
| MDW12-48S05  | 48<br>(36 - 75)     | 5                    | 2,400               | 83%        |
| MDW12-48S051 |                     | 5.1                  | 2,400               | 83%        |
| MDW12-48S12  |                     | 12                   | 1,000               | 87%        |
| MDW12-48S15  |                     | 15                   | 800                 | 88%        |
| MDW12-48S24  |                     | 24                   | 500                 | 88%        |
| MDW12-48D12  |                     | ±12                  | ±500                | 87%        |
| MDW12-48D15  |                     | ±15                  | ±400                | 87%        |

## Mechanical Dimensions

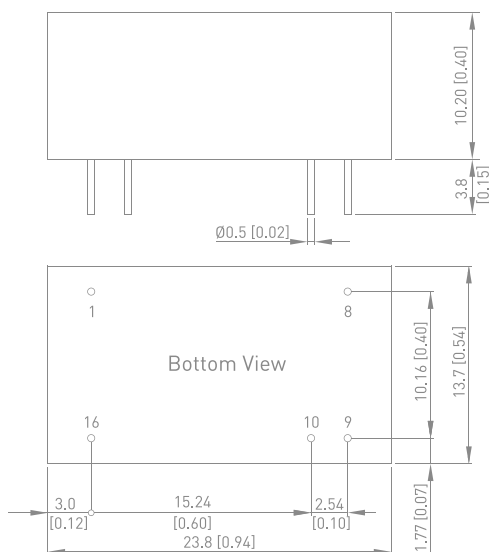

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |


NC= No Connection



- ## Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MDWI12-24S05  | 24<br>(9 - 36)      | 5                    | 2,400               | 83%        |
| MDWI12-24S051 |                     | 5.1                  | 2,400               | 83%        |
| MDWI12-24S12  |                     | 12                   | 1,000               | 87%        |
| MDWI12-24S15  |                     | 15                   | 800                 | 88%        |
| MDWI12-24S24  |                     | 24                   | 500                 | 88%        |
| MDWI12-24D12  |                     | ±12                  | ±500                | 87%        |
| MDWI12-24D15  |                     | ±15                  | ±400                | 87%        |
| MDWI12-48S05  | 48<br>(18 - 75)     | 5                    | 2,400               | 83%        |
| MDWI12-48S051 |                     | 5.1                  | 2,400               | 83%        |
| MDWI12-48S12  |                     | 12                   | 1,000               | 87%        |
| MDWI12-48S15  |                     | 15                   | 800                 | 88%        |
| MDWI12-48S24  |                     | 24                   | 500                 | 88%        |
| MDWI12-48D12  |                     | ±12                  | ±500                | 87%        |
| MDWI12-48D15  |                     | ±15                  | ±400                | 87%        |

## Pin Connections

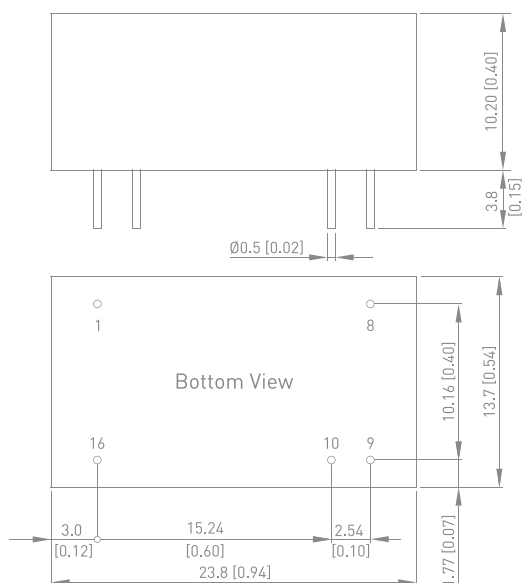

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC: No Connection

NEW


# MDW15 Series | 15W



- Smallest Encapsulated 15W Converter
- Industrial Standard DIP-16 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MDW15-12S051 | 12<br>(9 - 18)      | 5.1                  | 2,940               | 86%        |
| MDW15-12S12  |                     | 12                   | 1,250               | 87%        |
| MDW15-12S15  |                     | 15                   | 1,000               | 87%        |
| MDW15-12S24  |                     | 24                   | 625                 | 87%        |
| MDW15-12D12  |                     | ±12                  | ±625                | 87%        |
| MDW15-12D15  |                     | ±15                  | ±500                | 87%        |
| MDW15-24S051 | 24<br>(18 - 36)     | 5.1                  | 2,940               | 86%        |
| MDW15-24S12  |                     | 12                   | 1,250               | 87%        |
| MDW15-24S15  |                     | 15                   | 1,000               | 87%        |
| MDW15-24S24  |                     | 24                   | 625                 | 87%        |
| MDW15-24D12  |                     | ±12                  | ±625                | 87%        |
| MDW15-24D15  |                     | ±15                  | ±500                | 87%        |
| MDW15-48S051 | 48<br>(36 - 75)     | 5.1                  | 2,940               | 86%        |
| MDW15-48S12  |                     | 12                   | 1,250               | 87%        |
| MDW15-48S15  |                     | 15                   | 1,000               | 87%        |
| MDW15-48S24  |                     | 24                   | 625                 | 87%        |
| MDW15-48D12  |                     | ±12                  | ±625                | 87%        |
| MDW15-48D15  |                     | ±15                  | ±500                | 87%        |

## Mechanical Dimensions

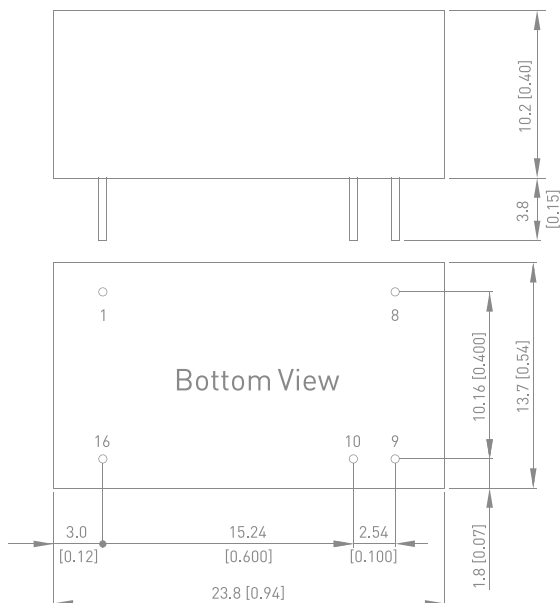

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC= No Connection

## MDWI15 Series | 15W




- ### Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MDWI15-24S051 | 24<br>(9 - 36)      | 5.1                  | 2,940               | 86%        |
| MDWI15-24S12  |                     | 12                   | 1,250               | 87%        |
| MDWI15-24S15  |                     | 15                   | 1,000               | 87%        |
| MDWI15-24S24  |                     | 24                   | 625                 | 87%        |
| MDWI15-24D12  |                     | ±12                  | ±625                | 87%        |
| MDWI15-24D15  |                     | ±15                  | ±500                | 87%        |
| MDWI15-48S051 | 48<br>(18 - 75)     | 5.1                  | 2,940               | 86%        |
| MDWI15-48S12  |                     | 12                   | 1,250               | 87%        |
| MDWI15-48S15  |                     | 15                   | 1,000               | 87%        |
| MDWI15-48S24  |                     | 24                   | 625                 | 87%        |
| MDWI15-48D12  |                     | ±12                  | ±625                | 87%        |
| MDWI15-48D15  |                     | ±15                  | ±500                | 87%        |

NC: No Connection

## Pin Connections

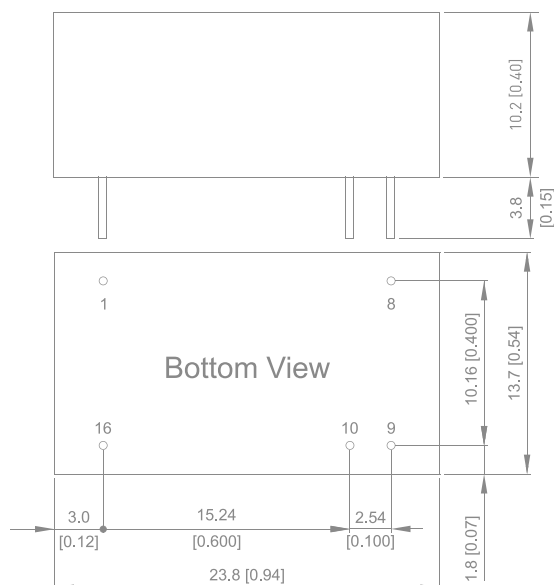

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NEW


# MDWI20 Series | 20W



- Smallest Encapsulated 20W Converter
- Industrial Standard DIP-16 Package
- High Power Density 60W/in<sup>3</sup>
- Excellent Efficiency up to 90%
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Operating Ambient Temp. Range -40°C to +87.5°C
- Low No Load Power Consumption
- No Min. Load Requirement/Output Trim
- Under-voltage, Overload and Short Circuit Protection
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MDWI20-12S05 | 12<br>(4.5 - 18)    | 5                    | 4000                | 88%        |
| MDWI20-12S12 |                     | 12                   | 1670                | 89%        |
| MDWI20-12S15 |                     | 15                   | 1340                | 88%        |
| MDWI20-12S24 |                     | 24                   | 835                 | 89%        |
| MDWI20-12D12 |                     | ±12                  | ±835                | 88%        |
| MDWI20-12D15 |                     | ±15                  | ±667                | 87%        |
| MDWI20-24S05 | 24<br>(9 - 36)      | 5                    | 4000                | 89%        |
| MDWI20-24S12 |                     | 12                   | 1670                | 90%        |
| MDWI20-24S15 |                     | 15                   | 1340                | 89%        |
| MDWI20-24S24 |                     | 24                   | 835                 | 90%        |
| MDWI20-24D12 |                     | ±12                  | ±835                | 89%        |
| MDWI20-24D15 |                     | ±15                  | ±667                | 88%        |
| MDWI20-48S05 | 48<br>(18 - 75)     | 5                    | 4000                | 89%        |
| MDWI20-48S12 |                     | 12                   | 1670                | 90%        |
| MDWI20-48S15 |                     | 15                   | 1340                | 89%        |
| MDWI20-48S24 |                     | 24                   | 835                 | 90%        |
| MDWI20-48D12 |                     | ±12                  | ±835                | 89%        |
| MDWI20-48D15 |                     | ±15                  | ±667                | 88%        |

## Mechanical Dimensions

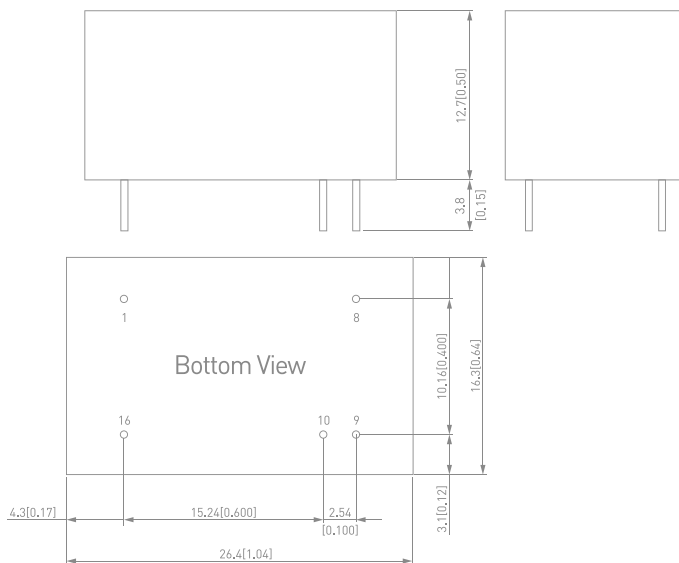

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 8   | Trim   | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

# MJW10 Series | 10W




- Industrial Standard 1" x 1" Package
  - Wide 2:1 Input Voltage Range
  - Fully Regulated Output Voltage
  - I/O Isolation 1500VDC
  - Wide Operating Temperature Range
  - Low No Load Power Consumption
  - No Min. Load Requirement
  - Under-voltage, Overload and Short Circuit Protection
  - Remote On/Off Control (option)
  - Shielded Metal Case with Insulated Baseplate
  - Conducted EMI EN 55032 Class A Approved
  - UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MJW10-12S033 | 12<br>(9 - 18)      | 3.3                  | 2,500               | 82%        |
| MJW10-12S05  |                     | 5                    | 2,000               | 85%        |
| MJW10-12S051 |                     | 5.1                  | 2,000               | 85%        |
| MJW10-12S12  |                     | 12                   | 830                 | 87%        |
| MJW10-12S15  |                     | 15                   | 670                 | 88%        |
| MJW10-12D05  |                     | ±5                   | ±1000               | 84%        |
| MJW10-12D12  |                     | ±12                  | ±416                | 87%        |
| MJW10-12D15  |                     | ±15                  | ±333                | 87%        |
| MJW10-24S033 | 24<br>(18 - 36)     | 3.3                  | 2,500               | 83%        |
| MJW10-24S05  |                     | 5                    | 2,000               | 85%        |
| MJW10-24S051 |                     | 5.1                  | 2,000               | 85%        |
| MJW10-24S12  |                     | 12                   | 830                 | 88%        |
| MJW10-24S15  |                     | 15                   | 670                 | 89%        |
| MJW10-24D05  |                     | ±5                   | ±1000               | 85%        |
| MJW10-24D12  |                     | ±12                  | ±416                | 88%        |
| MJW10-24D15  |                     | ±15                  | ±333                | 89%        |
| MJW10-48S033 | 48<br>(36 - 75)     | 3.3                  | 2,500               | 83%        |
| MJW10-48S05  |                     | 5                    | 2,000               | 86%        |
| MJW10-48S051 |                     | 5.1                  | 2,000               | 85%        |
| MJW10-48S12  |                     | 12                   | 830                 | 89%        |
| MJW10-48S15  |                     | 15                   | 670                 | 89%        |
| MJW10-48D05  |                     | ±5                   | ±1000               | 86%        |
| MJW10-48D12  |                     | ±12                  | ±416                | 87%        |
| MJW10-48D15  |                     | ±15                  | ±333                | 88%        |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

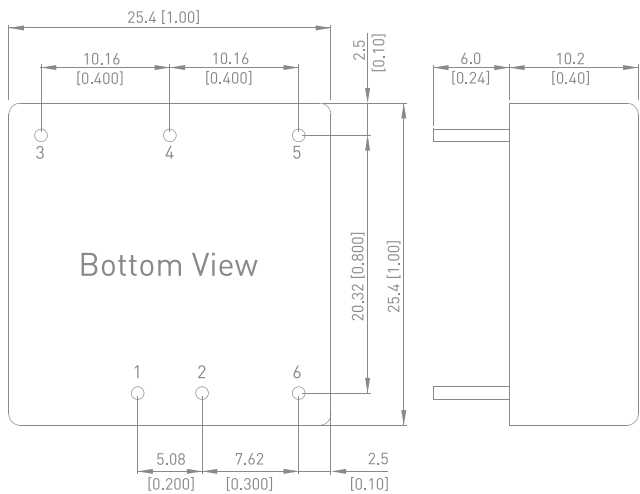

## Pin Connections

| Pin | Single                   | Dual                     |
|-----|--------------------------|--------------------------|
| 1   | +Vin                     | +Vin                     |
| 2   | -Vin                     | -Vin                     |
| 3   | +Vout                    | +Vout                    |
| 4   | No Pin                   | Common                   |
| 5   | -Vout                    | -Vout                    |
| 6   | Remote On/Off (Optional) | Remote On/Off (Optional) |

## MJWI10 Series | 10W




- Ultra-compact 1"x1" Package
  - Ultra-wide 4:1 Input Voltage Range
  - Fully Regulated Output Voltage
  - High Efficiency up to 87%
  - I/O Isolation 1500 VDC
  - Wide Operating Temperature Range
  - Under-voltage, Overload and Short Circuit Protection
  - Remote On/Off Control
  - Shielded Metal Case with Insulated Baseplate
  - Conducted EMI EN 55032 Class A Approved
  - UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MJWI10-24S033 | 24<br>(9 - 36)      | 3.3                  | 2,200               | 86%        |
| MJWI10-24S05  |                     | 5                    | 2,000               | 84%        |
| MJWI10-24S051 |                     | 5.1                  | 2,000               | 84%        |
| MJWI10-24S12  |                     | 12                   | 830                 | 86%        |
| MJWI10-24S15  |                     | 15                   | 660                 | 87%        |
| MJWI10-24S24  |                     | 24                   | 410                 | 86%        |
| MJWI10-24D05  |                     | ±5                   | ±1000               | 84%        |
| MJWI10-24D12  |                     | ±12                  | ±410                | 86%        |
| MJWI10-24D15  |                     | ±15                  | ±330                | 87%        |
| MJWI10-48S033 | 48<br>(18 - 75)     | 3.3                  | 2,200               | 85%        |
| MJWI10-48S05  |                     | 5                    | 2,000               | 84%        |
| MJWI10-48S051 |                     | 5.1                  | 2,000               | 84%        |
| MJWI10-48S12  |                     | 12                   | 830                 | 86%        |
| MJWI10-48S15  |                     | 15                   | 660                 | 87%        |
| MJWI10-48S24  |                     | 24                   | 410                 | 86%        |
| MJWI10-48D05  |                     | ±5                   | ±1000               | 84%        |
| MJWI10-48D12  |                     | ±12                  | ±410                | 86%        |
| MJWI10-48D15  |                     | ±15                  | ±330                | 87%        |

\*To order the converter with heatsink, please add a suffix -HS.

### Mechanical Dimensions

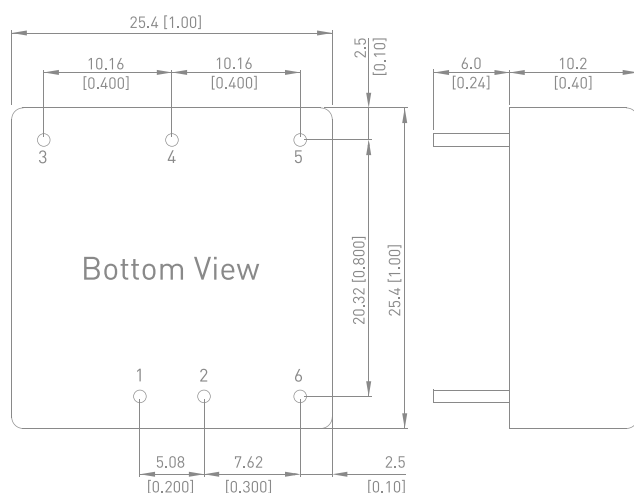

### Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | No Pin        | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

# MJW15 Series | 15W




- Industrial Standard 1" x 1" Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MJW15-12S033 | 12<br>(9 - 18)      | 3.3                  | 3,400               | 86%        |
| MJW15-12S05  |                     | 5                    | 3,000               | 89%        |
| MJW15-12S12  |                     | 12                   | 1,250               | 89%        |
| MJW15-12S15  |                     | 15                   | 1,000               | 89%        |
| MJW15-12S24  |                     | 24                   | 625                 | 90%        |
| MJW15-12D12  |                     | ±12                  | ±625                | 89%        |
| MJW15-12D15  |                     | ±15                  | ±500                | 90%        |
| MJW15-24S033 | 24<br>(18 - 36)     | 3.3                  | 3,400               | 86%        |
| MJW15-24S05  |                     | 5                    | 3,000               | 88%        |
| MJW15-24S12  |                     | 12                   | 1,250               | 90%        |
| MJW15-24S15  |                     | 15                   | 1,000               | 90%        |
| MJW15-24S24  |                     | 24                   | 625                 | 91%        |
| MJW15-24D12  |                     | ±12                  | ±625                | 90%        |
| MJW15-24D15  |                     | ±15                  | ±500                | 90%        |
| MJW15-48S033 | 48<br>(36 - 75)     | 3.3                  | 3,400               | 87%        |
| MJW15-48S05  |                     | 5                    | 3,000               | 88%        |
| MJW15-48S12  |                     | 12                   | 1,250               | 90%        |
| MJW15-48S15  |                     | 15                   | 1,000               | 90%        |
| MJW15-48S24  |                     | 24                   | 625                 | 91%        |
| MJW15-48D12  |                     | ±12                  | ±625                | 89%        |
| MJW15-48D15  |                     | ±15                  | ±500                | 90%        |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

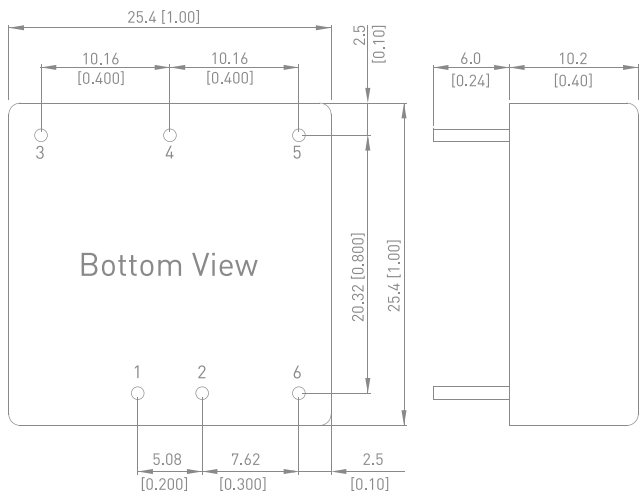

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | Trim          | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

## MJWI15 Series | 15W




- Industrial Standard 1" X 1" Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 91%
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MJWI15-24S033 | 24<br>(9 - 36)      | 3.3                  | 3,400               | 86%        |
| MJWI15-24S05  |                     | 5                    | 3,000               | 88%        |
| MJWI15-24S12  |                     | 12                   | 1,250               | 88%        |
| MJWI15-24S15  |                     | 15                   | 1,000               | 89%        |
| MJWI15-24S24  |                     | 24                   | 625                 | 91%        |
| MJWI15-24D12  |                     | ±12                  | ±625                | 89%        |
| MJWI15-24D15  |                     | ±15                  | ±500                | 89%        |
| MJWI15-48S033 | 48<br>(18 - 75)     | 3.3                  | 3,400               | 86%        |
| MJWI15-48S05  |                     | 5                    | 3,000               | 88%        |
| MJWI15-48S12  |                     | 12                   | 1,250               | 89%        |
| MJWI15-48S15  |                     | 15                   | 1,000               | 89%        |
| MJWI15-48S24  |                     | 24                   | 625                 | 91%        |
| MJWI15-48D12  |                     | ±12                  | ±625                | 90%        |
| MJWI15-48D15  |                     | ±15                  | ±500                | 89%        |

\*To order the converter with heatsink, please add a suffix -HS.


### Mechanical Dimensions

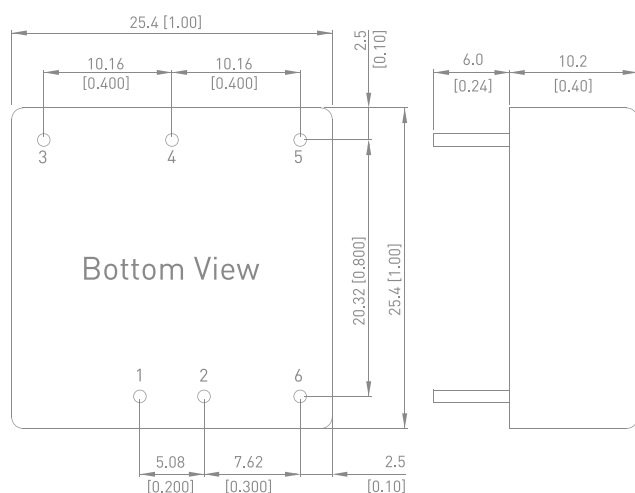

### Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | Trim          | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

MJWI20 Series | 20W




- Smallest Encapsulated 20W Converter
- Ultra-compact 1" X 1" Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 89%
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload/Voltage and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MJWI20-24S033 | 24<br>(9 - 36)      | 3.3                  | 4,500               | 87%        |
| MJWI20-24S05  |                     | 5                    | 4,000               | 89%        |
| MJWI20-24S12  |                     | 12                   | 1,670               | 89%        |
| MJWI20-24S15  |                     | 15                   | 1,340               | 89%        |
| MJWI20-24S24  |                     | 24                   | 835                 | 88%        |
| MJWI20-24D12  |                     | ±12                  | ±835                | 89%        |
| MJWI20-24D15  |                     | ±15                  | ±670                | 89%        |
| MJWI20-48S033 | 48<br>(18 - 75)     | 3.3                  | 4,500               | 88%        |
| MJWI20-48S05  |                     | 5                    | 4,000               | 89%        |
| MJWI20-48S12  |                     | 12                   | 1,670               | 89%        |
| MJWI20-48S15  |                     | 15                   | 1,340               | 89%        |
| MJWI20-48S24  |                     | 24                   | 835                 | 88%        |
| MJWI20-48D12  |                     | ±12                  | ±835                | 89%        |
| MJWI20-48D15  |                     | ±15                  | ±670                | 89%        |

\*To order the converter with heatsink, please add a suffix -HS.

Mechanical Dimensions

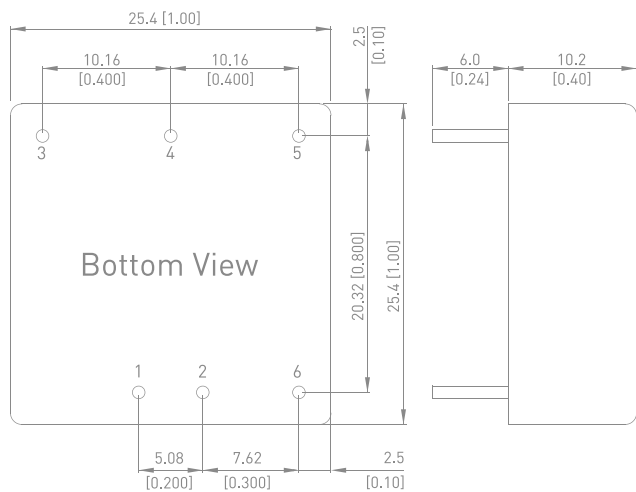

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | Trim          | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

## MJW25 Series | 25W




- Smallest Encapsulated 25W Converter
- Ultra-compact 1" X 1" Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 90%
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload/Voltage and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MJW25-12S033 | 12<br>(9 - 18)      | 3.3                  | 6,000               | 87%        |
| MJW25-12S05  |                     | 5                    | 5,000               | 89%        |
| MJW25-12S12  |                     | 12                   | 2,090               | 89%        |
| MJW25-12S15  |                     | 15                   | 1,670               | 89%        |
| MJW25-12D12  |                     | ±12                  | ±1040               | 89%        |
| MJW25-12D15  |                     | ±15                  | ±840                | 89%        |
| MJW25-24S033 | 24<br>(18 - 36)     | 3.3                  | 6,000               | 88%        |
| MJW25-24S05  |                     | 5                    | 5,000               | 90%        |
| MJW25-24S12  |                     | 12                   | 2,090               | 90%        |
| MJW25-24S15  |                     | 15                   | 1,670               | 90%        |
| MJW25-24D12  |                     | ±12                  | ±1040               | 89%        |
| MJW25-24D15  |                     | ±15                  | ±840                | 89%        |
| MJW25-48S033 | 48<br>(36 - 75)     | 3.3                  | 6,000               | 88%        |
| MJW25-48S05  |                     | 5                    | 5,000               | 90%        |
| MJW25-48S12  |                     | 12                   | 2,090               | 90%        |
| MJW25-48S15  |                     | 15                   | 1,670               | 90%        |
| MJW25-48D12  |                     | ±12                  | ±1040               | 89%        |
| MJW25-48D15  |                     | ±15                  | ±840                | 89%        |

\*To order the converter with heatsink, please add a suffix -HS.


### Mechanical Dimensions

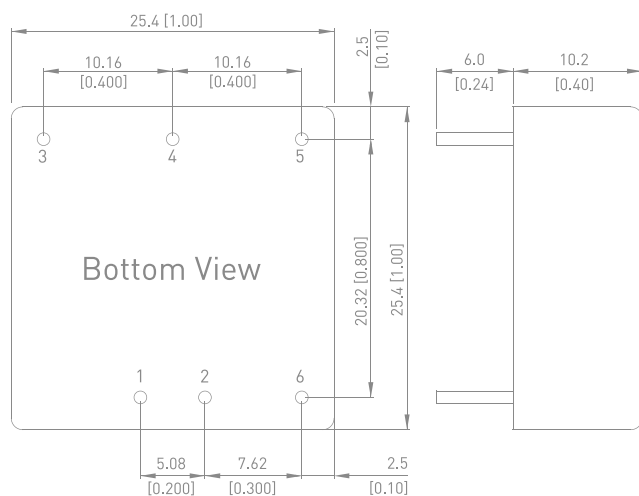

### Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | Trim          | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

MJWI25 Series | 25W




- Smallest Encapsulated 25W Converter
  - Ultra-compact 1" X 1" Package
  - Ultra-wide 4:1 Input Voltage Range
  - Fully Regulated Output Voltage
  - Excellent Efficiency up to 90%
  - I/O Isolation 1500 VDC
  - Wide Operating Temperature Range
  - No Min. Load Requirement
  - Overload/Voltage and Short Circuit Protection
  - Remote On/Off Control, Output Voltage Trim
  - Shielded Metal Case with Insulated Baseplate
  - UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MJWI25-24S033 | 24<br>(9 - 36)      | 3.3                  | 6,000               | 87%        |
| MJWI25-24S05  |                     | 5                    | 5,000               | 89%        |
| MJWI25-24S12  |                     | 12                   | 2,090               | 89%        |
| MJWI25-24S15  |                     | 15                   | 1,670               | 90%        |
| MJWI25-24D12  |                     | ±12                  | ±1040               | 89%        |
| MJWI25-24D15  |                     | ±15                  | ±840                | 89%        |
| MJWI25-48S033 | 48<br>(18 - 75)     | 3.3                  | 6,000               | 88%        |
| MJWI25-48S05  |                     | 5                    | 5,000               | 90%        |
| MJWI25-48S12  |                     | 12                   | 2,090               | 90%        |
| MJWI25-48S15  |                     | 15                   | 1,670               | 90%        |
| MJWI25-48D12  |                     | ±12                  | ±1040               | 89%        |
| MJWI25-48D15  |                     | ±15                  | ±840                | 89%        |

\*To order the converter with heatsink, please add a suffix -HS.

Mechanical Dimensions

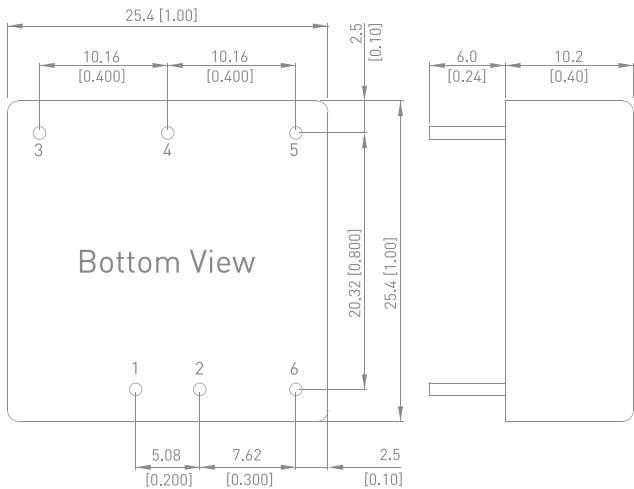

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | Trim          | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

## MJWI30 Series | 30W




- Smallest Encapsulated 30W Converter
  - Ultra-compact 1"x1" Package
  - Ultra-wide 4:1 Input Voltage Range
  - Fully Regulated Output Voltage
  - Excellent Efficiency up to 90%
  - I/O Isolation 1500 VDC
  - Wide Operating Temperature Range
  - No Min. Load Requirement
  - Very low no load power consumption
  - Under-voltage, Overload/Voltage and Short Circuit Protection
  - Remote On/Off Control, Output Voltage Trim
  - Shielded Metal Case with Insulated Baseplate
  - UL/cUL/IEC/EN 62368-1 Safety Approval & CE
- Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MJWI30-24S033 | 24<br>(9 - 36)      | 3.3                  | 7,000               | 87%        |
| MJWI30-24S05  |                     | 5                    | 6,000               | 88%        |
| MJWI30-24S12  |                     | 12                   | 2,500               | 88%        |
| MJWI30-24S15  |                     | 15                   | 2,000               | 88%        |
| MJWI30-24S24  |                     | 24                   | 1,250               | 88%        |
| MJWI30-24D12  |                     | ±12                  | ±1250               | 88%        |
| MJWI30-24D15  |                     | ±15                  | ±1000               | 88%        |
| MJWI30-48S033 | 48<br>(18 - 75)     | 3.3                  | 7,000               | 87%        |
| MJWI30-48S05  |                     | 5                    | 6,000               | 88%        |
| MJWI30-48S12  |                     | 12                   | 2,500               | 90%        |
| MJWI30-48S15  |                     | 15                   | 2,000               | 90%        |
| MJWI30-48S24  |                     | 24                   | 1,250               | 90%        |
| MJWI30-48D12  |                     | ±12                  | ±1250               | 90%        |
| MJWI30-48D15  |                     | ±15                  | ±1000               | 90%        |

\*To order the converter with heatsink, please add a suffix -HS.

### Mechanical Dimensions

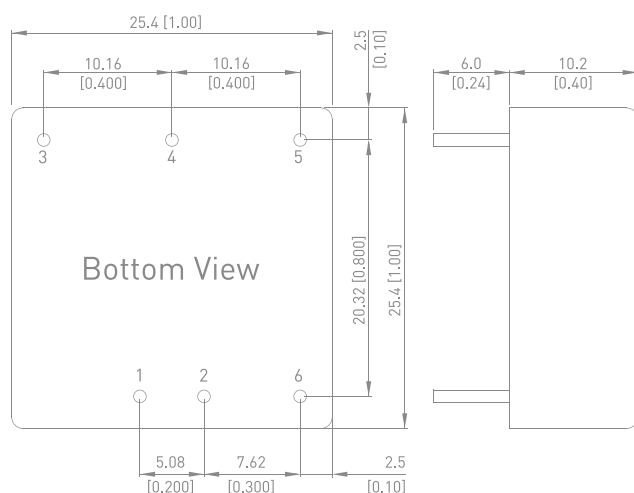

### Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | Trim          | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

NEW


# MJWI40 Series | 40W



- Smallest Encapsulated 40W Converter
- Ultra-compact 1"x1" Package
- Ultra-high Power Density 93W/in<sup>3</sup>
- Excellent Efficiency up to 93%
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Very Low No Load Power Consumption
- Under-voltage, Overload/Temperature and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MJWI40-24S05 | 24<br>(9 - 36)      | 5                    | 8000                | 91%        |
| MJWI40-24S12 |                     | 12                   | 3350                | 92%        |
| MJWI40-24S15 |                     | 15                   | 2700                | 92%        |
| MJWI40-24S24 |                     | 24                   | 1700                | 91%        |
| MJWI40-24S48 |                     | 48                   | 835                 | 90%        |
| MJWI40-24S54 |                     | 54                   | 740                 | 91%        |
| MJWI40-24D12 |                     | ±12                  | ±1700               | 91%        |
| MJWI40-24D15 |                     | ±15                  | ±1350               | 91%        |
| MJWI40-48S05 | 48<br>(18 - 75)     | 5                    | 8000                | 92%        |
| MJWI40-48S12 |                     | 12                   | 3350                | 93%        |
| MJWI40-48S15 |                     | 15                   | 2700                | 93%        |
| MJWI40-48S24 |                     | 24                   | 1700                | 92%        |
| MJWI40-48S48 |                     | 48                   | 835                 | 90%        |
| MJWI40-48S54 |                     | 54                   | 740                 | 91%        |
| MJWI40-48D12 |                     | ±12                  | ±1700               | 91%        |
| MJWI40-48D15 |                     | ±15                  | ±1350               | 90%        |

## Mechanical Dimensions

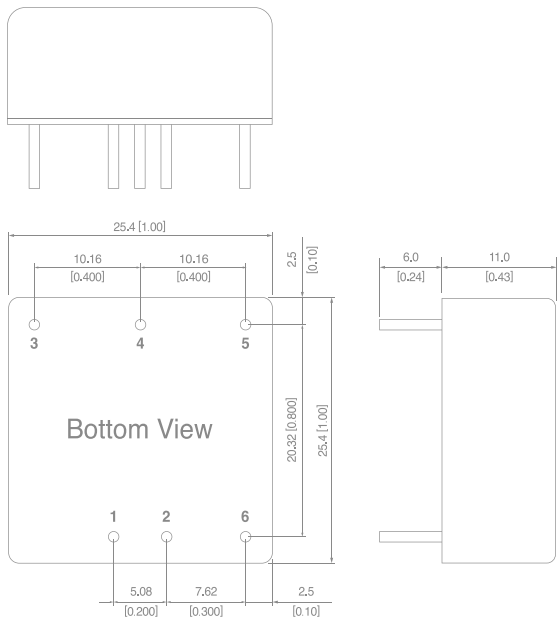

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | Trim          | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

## MKW40 Series | 40W




- Smallest Encapsulated 40W Converter
  - Compact Size of 2" X 1" Package
  - Wide 2:1 Input Voltage Range
  - Fully Regulated Output Voltage
  - Excellent Efficiency up to 92%
  - I/O Isolation 1500 VDC
  - Wide Operating Temperature Range
  - No Min. Load Requirement
  - Overload/Voltage/Temp. and Short Circuit Protection
  - Remote On/Off Control, Output Voltage Trim
  - Shielded Metal Case with Insulated Baseplate
  - UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MKW40-12S033 | 12<br>(9 - 18)      | 3.3                  | 8,000               | 89%        |
| MKW40-12S05  |                     | 5                    | 8,000               | 89%        |
| MKW40-12S12  |                     | 12                   | 3,330               | 89%        |
| MKW40-12S15  |                     | 15                   | 2,670               | 90%        |
| MKW40-12S24  |                     | 24                   | 1,670               | 91%        |
| MKW40-12D12  |                     | ±12                  | ±1670               | 88%        |
| MKW40-12D15  |                     | ±15                  | ±1330               | 88%        |
| MKW40-24S033 | 24<br>(18 - 36)     | 3.3                  | 8,000               | 90%        |
| MKW40-24S05  |                     | 5                    | 8,000               | 91%        |
| MKW40-24S12  |                     | 12                   | 3,330               | 91%        |
| MKW40-24S15  |                     | 15                   | 2,670               | 91%        |
| MKW40-24S24  |                     | 24                   | 1,670               | 91%        |
| MKW40-24D12  |                     | ±12                  | ±1670               | 89%        |
| MKW40-24D15  |                     | ±15                  | ±1330               | 89%        |
| MKW40-48S033 | 48<br>(36 - 75)     | 3.3                  | 8,000               | 90%        |
| MKW40-48S05  |                     | 5                    | 8,000               | 91%        |
| MKW40-48S12  |                     | 12                   | 3,330               | 92%        |
| MKW40-48S15  |                     | 15                   | 2,670               | 92%        |
| MKW40-48S24  |                     | 24                   | 1,670               | 91%        |
| MKW40-48D12  |                     | ±12                  | ±1670               | 89%        |
| MKW40-48D15  |                     | ±15                  | ±1330               | 89%        |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

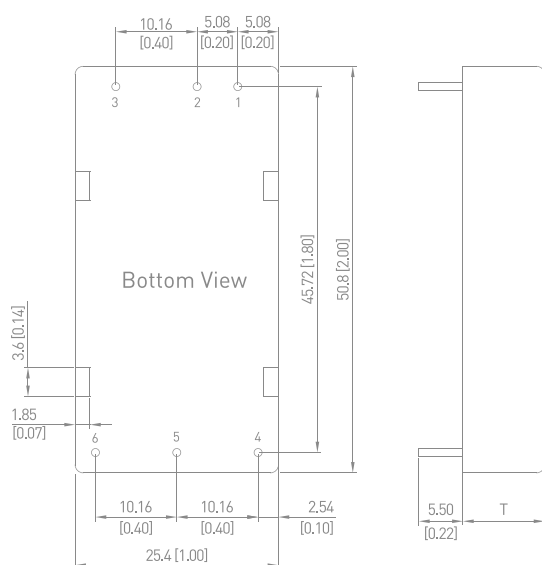

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 4   | +Vout         | +Vout         |
| 5   | -Vout         | Common        |
| 6   | Trim          | -Vout         |

T: 10.2[0.40] for other output models  
T: 11.0[0.43] for 24V output models

# MKWI40 Series | 40W




- Smallest Encapsulated 40W Converter
  - Ultra-compact 2" X 1" Package
  - Ultra-wide 4:1 Input Voltage Range
  - Fully Regulated Output Voltage
  - Excellent Efficiency up to 91%
  - I/O Isolation 1500 VDC
  - Wide Operating Temperature Range
  - No Min. Load Requirement
  - Overload/Voltage/Temp. and Short Circuit Protection
  - Remote On/Off Control, Output Voltage Trim
  - Shielded Metal Case with Insulated Baseplate
  - UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1
- Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MKWI40-24S033 | 24<br>(9 - 36)      | 3.3                  | 8,000               | 89%        |
| MKWI40-24S05  |                     | 5                    | 8,000               | 90%        |
| MKWI40-24S12  |                     | 12                   | 3,330               | 89%        |
| MKWI40-24S15  |                     | 15                   | 2,670               | 89%        |
| MKWI40-24S24  |                     | 24                   | 1,670               | 91%        |
| MKWI40-24D12  |                     | ±12                  | ±1670               | 88%        |
| MKWI40-24D15  |                     | ±15                  | ±1330               | 88%        |
| MKWI40-48S033 | 24<br>(18 - 36)     | 3.3                  | 8,000               | 89%        |
| MKWI40-48S05  |                     | 5                    | 8,000               | 90%        |
| MKWI40-48S12  |                     | 12                   | 3,330               | 90%        |
| MKWI40-48S15  |                     | 15                   | 2,670               | 90%        |
| MKWI40-48S24  |                     | 24                   | 1,670               | 91%        |
| MKWI40-48D12  |                     | ±12                  | ±1670               | 88%        |
| MKWI40-48D15  |                     | ±15                  | ±1330               | 88%        |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

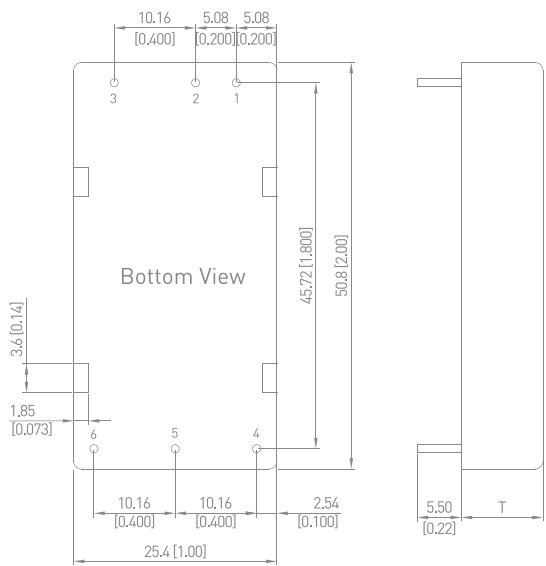

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 4   | +Vout         | +Vout         |
| 5   | -Vout         | Common        |
| 6   | Trim          | -Vout         |

T: 10.2[0.40] for other output models  
T: 11.0[0.43]for 24V output models

# MKW50 Series | 50W




- Smallest Encapsulated 50W Converter
- Ultra-compact 2" X 1" Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 92%
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload/Voltage/Temp. and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MKW50-12S033 | 12<br>( 9 - 18 )    | 3.3                  | 10,000              | 89%        |
| MKW50-12S05  |                     | 5                    | 10,000              | 90%        |
| MKW50-12S12  |                     | 12                   | 4,170               | 91%        |
| MKW50-12S15  |                     | 15                   | 3,330               | 91%        |
| MKW50-12S24  |                     | 24                   | 2,080               | 91%        |
| MKW50-24S033 | 24<br>( 18 - 36 )   | 3.3                  | 10,000              | 89%        |
| MKW50-24S05  |                     | 5                    | 10,000              | 92%        |
| MKW50-24S12  |                     | 12                   | 4,170               | 92%        |
| MKW50-24S15  |                     | 15                   | 3,330               | 92%        |
| MKW50-24S24  |                     | 24                   | 2,080               | 91%        |
| MKW50-48S033 | 48<br>( 36 - 75 )   | 3.3                  | 10,000              | 89%        |
| MKW50-48S05  |                     | 5                    | 10,000              | 92%        |
| MKW50-48S12  |                     | 12                   | 4,170               | 92%        |
| MKW50-48S15  |                     | 15                   | 3,330               | 92%        |
| MKW50-48S24  |                     | 24                   | 2,080               | 91%        |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

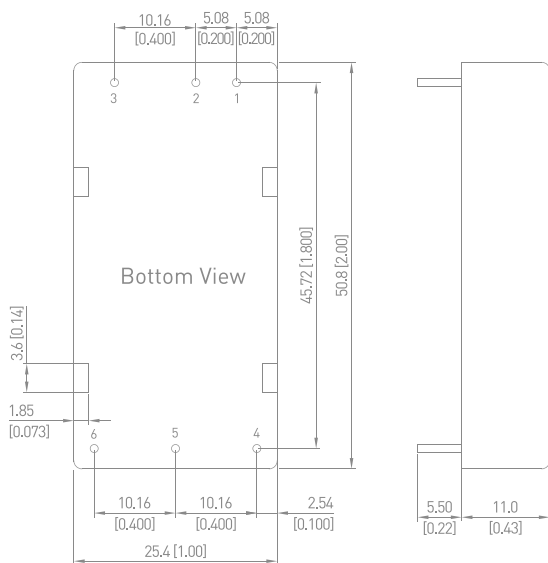

## Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | +Vin          |
| 2   | -Vin          |
| 3   | Remote On/Off |
| 4   | +Vout         |
| 5   | -Vout         |
| 6   | Trim          |


MKWI50 Series | 50W



- Smallest Encapsulated 50W Converter
- Compact Size of 2" X 1" Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 92%
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload/Voltage/Temp. and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MKWI50-24S033 | 24<br>( 9 - 36 )    | 3.3                  | 10,000              | 90%        |
| MKWI50-24S05  |                     | 5                    | 10,000              | 91%        |
| MKWI50-24S12  |                     | 12                   | 4,170               | 92%        |
| MKWI50-24S15  |                     | 15                   | 3,330               | 92%        |
| MKWI50-24S24  |                     | 24                   | 2,080               | 91%        |
| MKWI50-48S033 | 48<br>( 18 - 75 )   | 3.3                  | 10,000              | 90%        |
| MKWI50-48S05  |                     | 5                    | 10,000              | 91%        |
| MKWI50-48S12  |                     | 12                   | 4,170               | 92%        |
| MKWI50-48S15  |                     | 15                   | 3,330               | 92%        |
| MKWI50-48S24  |                     | 24                   | 2,080               | 91%        |

Mechanical Dimensions

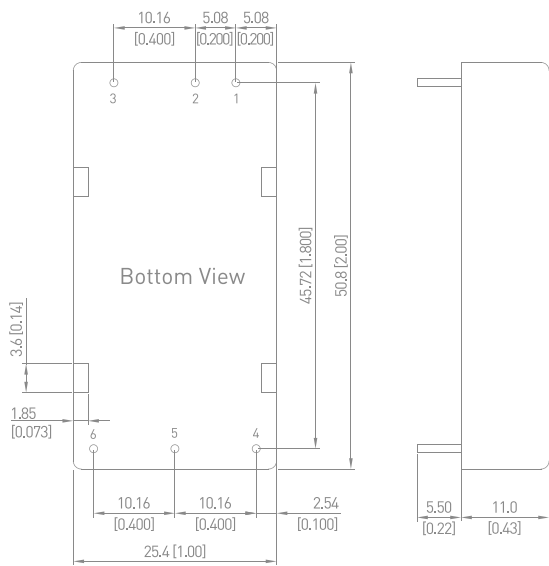

Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | +Vin          |
| 2   | -Vin          |
| 3   | Remote On/Off |
| 4   | +Vout         |
| 5   | -Vout         |
| 6   | Trim          |

NEW

# MKWI80 Series | 80W




- Smallest Encapsulated 80W Converter
- Ultra-compact 2"x1" Package
- Ultra-high Power Density 93W/in<sup>3</sup>
- Excellent Efficiency up to 92%
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Very Low No Load Power Consumption
- Under-voltage, Overload/Temperature and Short

## Circuit Protection

- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MKWI80-24S05 | 24<br>(9 – 36)      | 5                    | 16000               | 91%        |
| MKWI80-24S12 |                     | 12                   | 6600                | 92%        |
| MKWI80-24S15 |                     | 15                   | 5300                | 92%        |
| MKWI80-24S24 |                     | 24                   | 3300                | 92%        |
| MKWI80-24S48 |                     | 48                   | 1670                | 92%        |
| MKWI80-24S54 |                     | 54                   | 1480                | 92%        |
| MKWI80-24D12 |                     | ±12                  | ±3300               | 92%        |
| MKWI80-24D15 |                     | ±15                  | ±2660               | 92%        |
| MKWI80-48S05 | 48<br>(18 – 75)     | 5                    | 16000               | 91%        |
| MKWI80-48S12 |                     | 12                   | 6600                | 92%        |
| MKWI80-48S15 |                     | 15                   | 5300                | 92%        |
| MKWI80-48S24 |                     | 24                   | 3300                | 92%        |
| MKWI80-48S48 |                     | 48                   | 1670                | 92%        |
| MKWI80-48S54 |                     | 54                   | 1480                | 92%        |
| MKWI80-48D12 |                     | ±12                  | ±3300               | 92%        |
| MKWI80-48D15 |                     | ±15                  | ±2660               | 92%        |

## Mechanical Dimensions

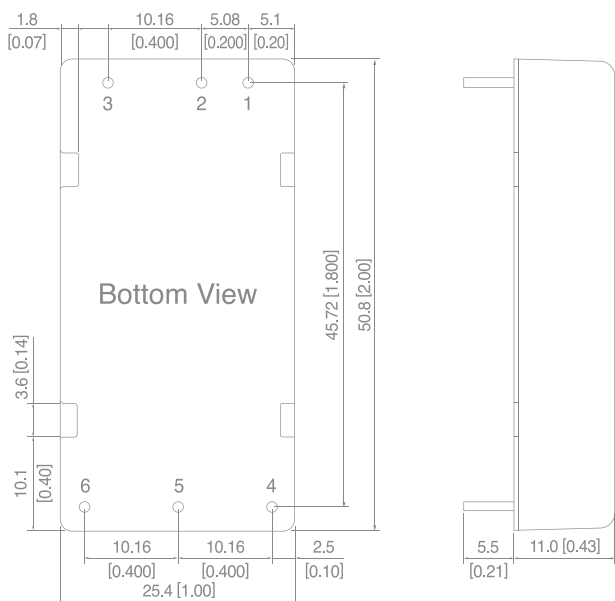

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 4   | +Vout         | +Vout         |
| 5   | -Vout         | Common        |
| 6   | Trim          | -Vout         |

NC= No Connection

## MJWI06C Series | 6W




- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- High Efficiency up to 85%
- I/O Isolation 3000 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- EMI Emission EN 55032 Class A Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE

### Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MJWI06-24S05C  | 24<br>(9 - 36)      | 5                    | 1,200               | 81%        |
| MJWI06-24S051C |                     | 5.1                  | 1,200               | 81%        |
| MJWI06-24S12C  |                     | 12                   | 500                 | 84%        |
| MJWI06-24S15C  |                     | 15                   | 400                 | 84%        |
| MJWI06-24S24C  |                     | 24                   | 250                 | 85%        |
| MJWI06-24S48C  |                     | 48                   | 125                 | 83%        |
| MJWI06-24D12C  |                     | ±12                  | ±250                | 84%        |
| MJWI06-24D15C  |                     | ±15                  | ±200                | 85%        |
| MJWI06-24D24C  |                     | ±24                  | ±125                | 84%        |
| MJWI06-48S05C  | 48<br>(18 - 75)     | 5                    | 1,200               | 80%        |
| MJWI06-48S051C |                     | 5.1                  | 1,200               | 80%        |
| MJWI06-48S12C  |                     | 12                   | 500                 | 84%        |
| MJWI06-48S15C  |                     | 15                   | 400                 | 84%        |
| MJWI06-48S24C  |                     | 24                   | 250                 | 85%        |
| MJWI06-48S48C  |                     | 48                   | 125                 | 83%        |
| MJWI06-48D12C  |                     | ±12                  | ±250                | 85%        |
| MJWI06-48D15C  |                     | ±15                  | ±200                | 85%        |
| MJWI06-48D24C  |                     | ±24                  | ±125                | 84%        |

### Mechanical Dimensions

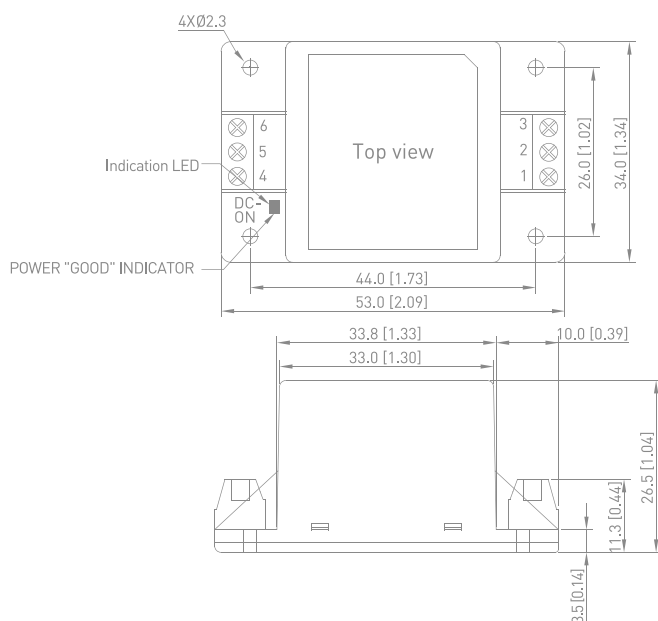

### Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | Remote On/Off | Remote On/Off |
| 2   | -Vin          | -Vin          |
| 3   | +Vin          | +Vin          |
| 4   | -Vout         | -Vout         |
| 5   | NC            | Common        |
| 6   | +Vout         | +Vout         |

NC = No Connection


## MKWI10C Series | 10W



- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- High Efficiency up to 86%
- I/O Isolation 3000 VDC
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- EMI Emission EN 55032 Class A Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MKWI10-24S05C  | 24<br>(9 - 36)      | 5                    | 2,000               | 84%        |
| MKWI10-24S051C |                     | 5.1                  | 2,000               | 84%        |
| MKWI10-24S12C  |                     | 12                   | 833                 | 86%        |
| MKWI10-24S15C  |                     | 15                   | 666                 | 86%        |
| MKWI10-24S24C  |                     | 24                   | 416                 | 86%        |
| MKWI10-24S48C  |                     | 48                   | 208                 | 84%        |
| MKWI10-24D12C  |                     | ±12                  | ±416                | 86%        |
| MKWI10-24D15C  |                     | ±15                  | ±333                | 86%        |
| MKWI10-24D24C  |                     | ±24                  | ±208                | 85%        |
| MKWI10-48S05C  |                     | 5                    | 2,000               | 84%        |
| MKWI10-48S051C | 24<br>(18 - 36)     | 5.1                  | 2,000               | 84%        |
| MKWI10-48S12C  |                     | 12                   | 833                 | 86%        |
| MKWI10-48S15C  |                     | 15                   | 666                 | 86%        |
| MKWI10-48S24C  |                     | 24                   | 416                 | 86%        |
| MKWI10-48S48C  |                     | 48                   | 208                 | 84%        |
| MKWI10-48D12C  |                     | ±12                  | ±416                | 86%        |
| MKWI10-48D15C  |                     | ±15                  | ±333                | 86%        |
| MKWI10-48D24C  |                     | ±24                  | ±208                | 85%        |

### Mechanical Dimensions

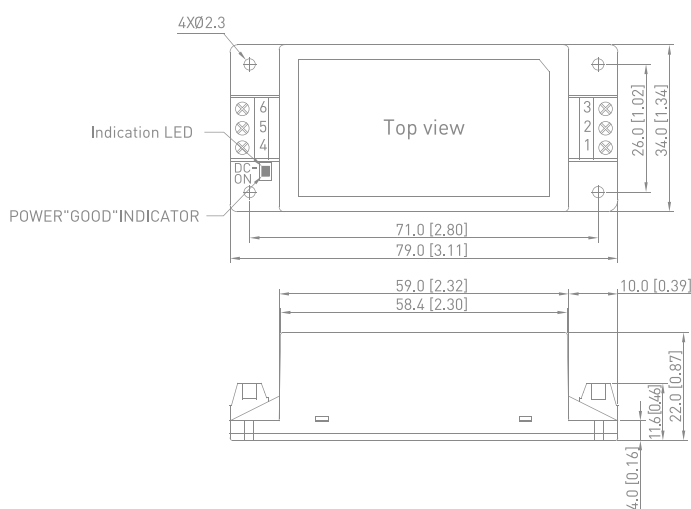

### Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | Remote On/Off | Remote On/Off |
| 2   | -Vin          | -Vin          |
| 3   | +Vin          | +Vin          |
| 4   | -Vout         | -Vout         |
| 5   | NC            | Common        |
| 6   | +Vout         | +Vout         |

NC: No Connection


# MOWI20C Series | 20W



- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 91%
- I/O Isolation 2500 VDC
- Wide Operating Temperature Range
- Under-voltage, Overload/Voltage and Short Circuit Protection
- No Min. Load Requirement
- Remote On/Off Control
- Conducted EMI EN 55032 Class A Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MOWI20-24S051C | 24<br>(9 - 36)      | 5.1                  | 4,000               | 90%        |
| MOWI20-24S12C  |                     | 12                   | 1,670               | 91%        |
| MOWI20-24S24C  |                     | 24                   | 835                 | 91%        |
| MOWI20-24S48C  |                     | 48                   | 420                 | 89%        |
| MOWI20-48S051C | 48<br>(18 - 75)     | 5.1                  | 4,000               | 90%        |
| MOWI20-48S12C  |                     | 12                   | 1,670               | 91%        |
| MOWI20-48S24C  |                     | 24                   | 835                 | 91%        |
| MOWI20-48S48C  |                     | 48                   | 420                 | 89%        |

## Mechanical Dimensions

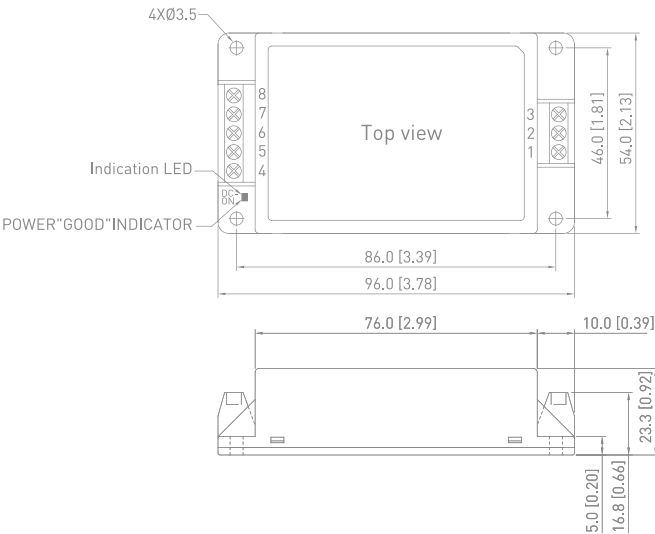

## Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | Remote On/Off |
| 2   | -Vin          |
| 3   | +Vin          |
| 4   | NC            |
| 5   | -Vout         |
| 6   | NC            |
| 7   | +Vout         |
| 8   | NC            |

NC= No Connection


## MQWI40C Series | 40W



- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 92%
- I/O Isolation 2500 VDC
- Wide Operating Temperature Range
- Under-voltage, Overload/Voltage and Short Circuit Protection
- No Min. Load Requirement
- Remote On/Off Control
- Conducted EMI EN 55032 Class A Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MQWI40-24S051C | 24<br>( 9 - 36 )    | 5.1                  | 8,000               | 90%        |
| MQWI40-24S12C  |                     | 12                   | 3,330               | 90%        |
| MQWI40-24S24C  |                     | 24                   | 1,670               | 90%        |
| MQWI40-24S48C  |                     | 48                   | 835                 | 89%        |
| MQWI40-48S051C | 48<br>( 18 - 75 )   | 5.1                  | 8,000               | 89%        |
| MQWI40-48S12C  |                     | 12                   | 3,330               | 91%        |
| MQWI40-48S24C  |                     | 24                   | 1,670               | 92%        |
| MQWI40-48S48C  |                     | 48                   | 835                 | 90%        |

### Mechanical Dimensions

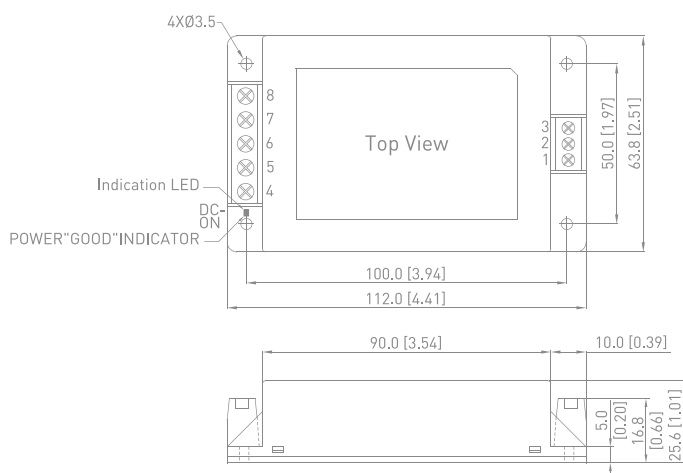

### Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | Remote On/Off |
| 2   | -Vin          |
| 3   | +Vin          |
| 4   | +Vout         |
| 5   | NC            |
| 6   | -Vout         |
| 7   | NC            |
| 8   | NC            |

NC= No Connection


MRWI60C Series | 60W



- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 92%
- I/O Isolation 2500 VDC
- Wide Operating Temperature Range
- Under-voltage, Overload/Voltage and Short Circuit Protection
- No Min. Load Requirement
- Remote On/Off Control
- Conducted EMI EN 55032 Class A Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MRWI60-24S051C | 24<br>(9 - 36)      | 5.1                  | 12,000              | 90%        |
| MRWI60-24S12C  |                     | 12                   | 5,000               | 91%        |
| MRWI60-24S24C  |                     | 24                   | 2,500               | 91%        |
| MRWI60-24S48C  |                     | 48                   | 1,250               | 91%        |
| MRWI60-48S051C | 48<br>(18 - 75)     | 5.1                  | 12,000              | 91%        |
| MRWI60-48S12C  |                     | 12                   | 5,000               | 92%        |
| MRWI60-48S24C  |                     | 24                   | 2,500               | 91%        |
| MRWI60-48S48C  |                     | 48                   | 1,250               | 91%        |

Mechanical Dimensions

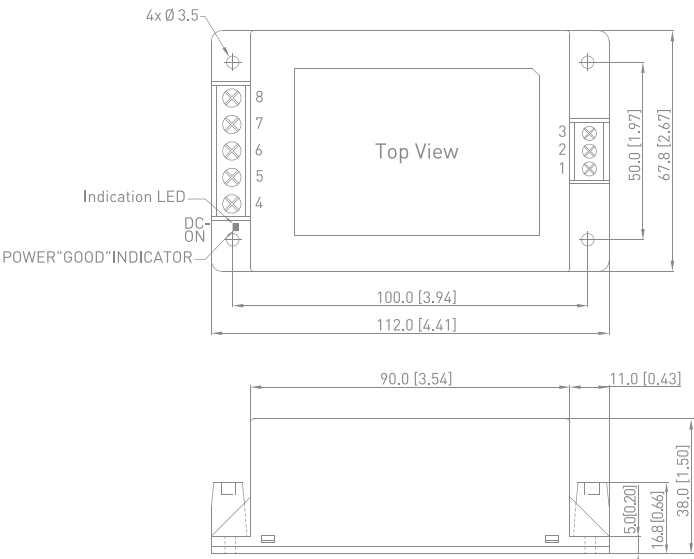

Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | Remote On/Off |
| 2   | -Vin          |
| 3   | +Vin          |
| 4   | NC            |
| 5   | +Vout         |
| 6   | NC            |
| 7   | -Vout         |
| 8   | NC            |

NC= No Connection


## M78AR-0.5 Series | 0.5A



- Industrial Standard SIP-3 Package
- Pin-out compatible with LM78xx Linear Regulators
- Fully Regulated Output Voltage
- Low Ripple & Noise
- Excellent Efficiency up to 97%
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Over Temp. and Short Circuit Protection

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| M78AR015-0.5 | 4.75 - 32           | 1.5                  | 500                 | 63%        |
| M78AR018-0.5 |                     | 1.8                  | 500                 | 71%        |
| M78AR025-0.5 |                     | 2.5                  | 500                 | 77%        |
| M78AR033-0.5 |                     | 3.3                  | 500                 | 81%        |
| M78AR05-0.5  | 6.5 - 32            | 5                    | 500                 | 86%        |
| M78AR065-0.5 | 8 - 32              | 6.5                  | 500                 | 88%        |
| M78AR09-0.5  | 11 - 32             | 9                    | 500                 | 92%        |
| M78AR12-0.5  | 15 - 32             | 12                   | 500                 | 94%        |
| M78AR15-0.5  | 18 - 32             | 15                   | 500                 | 95%        |

### Mechanical Dimensions

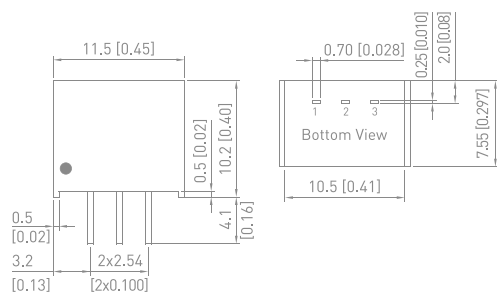

### Pin Connections

| Pin | Function |
|-----|----------|
| 1   | +Vin     |
| 2   | GND      |
| 3   | +Vout    |


M78SAR-0.5 Series | 0.5A



- Industrial SMD Package
  - Fully Regulated Output Voltage
  - Low Ripple & Noise
  - Excellent Efficiency up to 97%
  - Wide Operating Temperature Range
  - No Min. Load Requirement
  - Over Temp. and Short Circuit Protection
  - Remote ON/OFF Control, Output Voltage Trim
  - Qualified for Lead-free Reflow Solder Process
- According to IPC/JEDEC J-STD-020D.1
- Tape & Reel Package Available

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| M78SAR015-0.5 | 4.75 - 32           | 1.5                  | 500                 | 63%        |
| M78SAR018-0.5 |                     | 1.8                  | 500                 | 71%        |
| M78SAR025-0.5 |                     | 2.5                  | 500                 | 77%        |
| M78SAR033-0.5 |                     | 3.3                  | 500                 | 81%        |
| M78SAR05-0.5  | 6.5 - 32            | 5                    | 500                 | 86%        |
| M78SAR065-0.5 | 8 - 32              | 6.5                  | 500                 | 88%        |
| M78SAR09-0.5  | 11 - 32             | 9                    | 500                 | 92%        |
| M78SAR12-0.5  | 15 - 32             | 12                   | 500                 | 94%        |
| M78SAR15-0.5  | 18 - 32             | 15                   | 500                 | 95%        |

Mechanical Dimensions

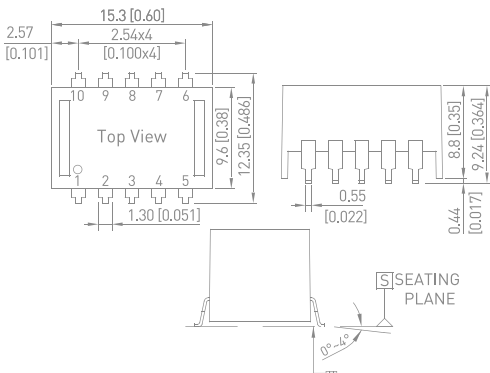

Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | +Vin          |
| 2   | +Vin          |
| 3   | GND           |
| 4   | +Vout         |
| 5   | +Vout         |
| 6   | Vadj.         |
| 7   | GND           |
| 8   | GND           |
| 9   | GND           |
| 10  | Remote On/Off |


# M78AR-1 Series | 1A



- Industrial Standard SIP-3 Package
- Pin-out compatible with LM78xx Linear Regulators
- Fully Regulated Output Voltage
- Low Ripple & Noise
- Excellent Efficiency up to 96%
- Wide Operating Temperature Range
- Low No Load Power Consumption
- No Min. Load Requirement
- Over Temp. and Short Circuit Protection

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| M78AR033-1   | 6.5 - 32            | 3.3                  | 1,000               | 87%        |
| M78AR05-1    | 6.5 - 32            | 5                    | 1,000               | 90%        |
| M78AR12-1    | 6.5 - 32            | 12                   | 1,000               | 94%        |

## Mechanical Dimensions

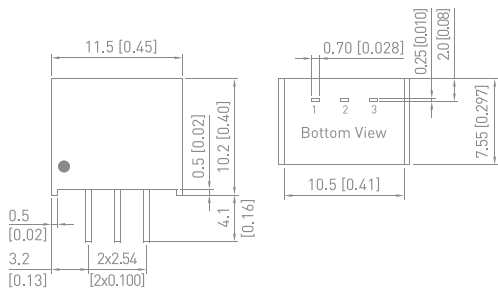

## Pin Connections

| Pin | Function |
|-----|----------|
| 1   | +Vin     |
| 2   | GND      |
| 3   | +Vout    |

# AAF-03 Series | 3W




| Model Number | Input Voltage           | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|-------------------------|----------------------|---------------------|------------|
| AAF-03S03    | 85-264VAC<br>120-370VDC | 3.3                  | 900                 | 70%        |
| AAF-03S05    |                         | 5                    | 600                 | 72%        |
| AAF-03S09    |                         | 9                    | 333                 | 77%        |
| AAF-03S12    |                         | 12                   | 250                 | 78%        |
| AAF-03S15    |                         | 15                   | 200                 | 78%        |
| AAF-03S24    |                         | 24                   | 125                 | 78%        |



- Ultra Compact Size 1.0" x 1.0" x 0.64"
- Fully Encapsulated Plastic Case for PCB Mounting
- Universal Input 85-264VAC
- I/O Isolation 3000VAC with Reinforced Insulation
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55032/14-1 Class B Approved
- EMS Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- Eco Design, Low No Load Power Consumption ← 150mW
- UL/cUL/IEC/EN 62368-1(60950-1), TUV/IEC/EN 60335-1 Safety Approval & CE Marking

## Mechanical Dimensions

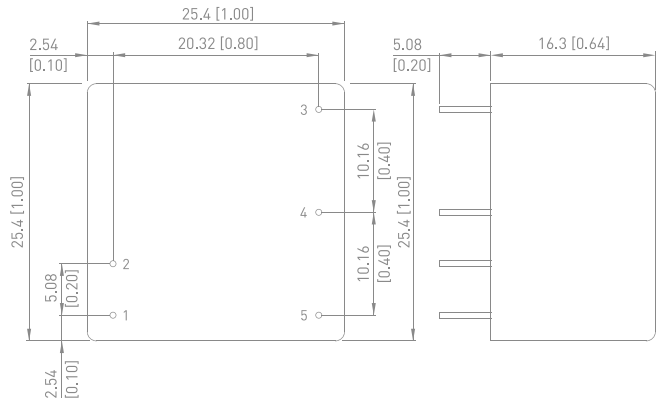

## Pin Connections

| Pin | Function   |
|-----|------------|
| 1   | AC Netural |
| 2   | AC Line    |
| 3   | NC         |
| 4   | -Vout      |
| 5   | +Vout      |


## ABF-04 Series | 4W



- Fully Encapsulated Plastic Case for PCB Mounting
- Universal Input 85-264VAC, 47-440Hz
- I/O Isolation 3000VAC with Reinforced Insulation
- Wide Operating Temperature Range
- No Min. Load Requirement
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN55032 Class B Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- Eco Design, Compliant to Energy Star Specification and ErP Directive 2009/125/EC
- UL/cUL/IEC/EN (62368-1)60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage           | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|-------------------------|----------------------|---------------------|------------|
| ABF-04S03    | 85-264VAC<br>120-370VDC | 3.3                  | 1,200               | 70%        |
| ABF-04S05    |                         | 5                    | 800                 | 72%        |
| ABF-04S09    |                         | 9                    | 444                 | 75%        |
| ABF-04S12    |                         | 12                   | 333                 | 76%        |
| ABF-04S15    |                         | 15                   | 267                 | 76%        |
| ABF-04S24    |                         | 24                   | 167                 | 77%        |
| ABF-04D53    |                         | +5                   | 600                 | 72%        |
|              |                         | +3.3                 | 150                 |            |
|              |                         | +12                  | 250                 |            |
| ABF-04D125   |                         | +15                  | 120                 | 75%        |
| ABF-04D12    |                         | ±12                  | ±166                | 77%        |
| ABF-04D15    |                         | ±15                  | ±133                | 77%        |

### Mechanical Dimensions

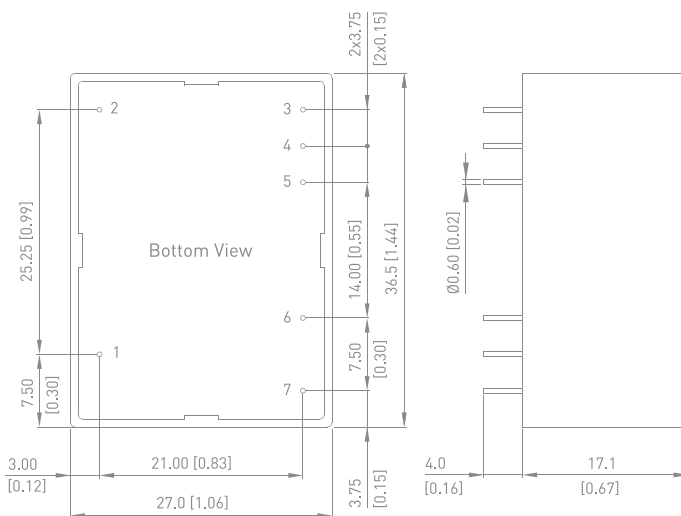

### Pin Connections

| Pin | Single     | D12/D15 | D53/D125 |
|-----|------------|---------|----------|
| 1   | NC         |         |          |
| 2   | NC         |         |          |
| 3   | +Vout      | +Vout   | +Vout1   |
| 4   | -Vout      | Common  | Common   |
| 5   | No Pin     | -Vout   | +Vout2   |
| 6   | AC Netural |         |          |
| 7   | AC Line    |         |          |

NC: No Connection


# AAF-05 Series | 5W



- Ultra Compact Size 1.0 x 1.0 x 0.64"
- Fully Encapsulated Plastic Case for PCB and Chassis Mounting Version
- Universal Input 85-264VAC
- I/O Isolation 3000VAC with Reinforced Insulation
- No Min. Load Requirement
- Wide Operating Temperature Range
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55032/14-1 Class B Approved
- EMS Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- Eco Design, No Load Input Power 300mW max.
- Safety Approval to UL/cUL/IEC/EN 62368-1(60950-1),TUV IEC/EN 60335-1 & CE Marking

| Model Number | Input Voltage           | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|-------------------------|----------------------|---------------------|------------|
| AAF-05S03    | 85-264VAC<br>120-370VDC | 3.3                  | 1,515               | 74%        |
| AAF-05S05    |                         | 5                    | 1,000               | 80%        |
| AAF-05S09    |                         | 9                    | 555                 | 82%        |
| AAF-05S12    |                         | 12                   | 416                 | 82%        |
| AAF-05S15    |                         | 15                   | 333                 | 83%        |
| AAF-05S24    |                         | 24                   | 208                 | 83%        |
| AAF-05S48    |                         | 48                   | 104                 | 85%        |

## Mechanical Dimensions

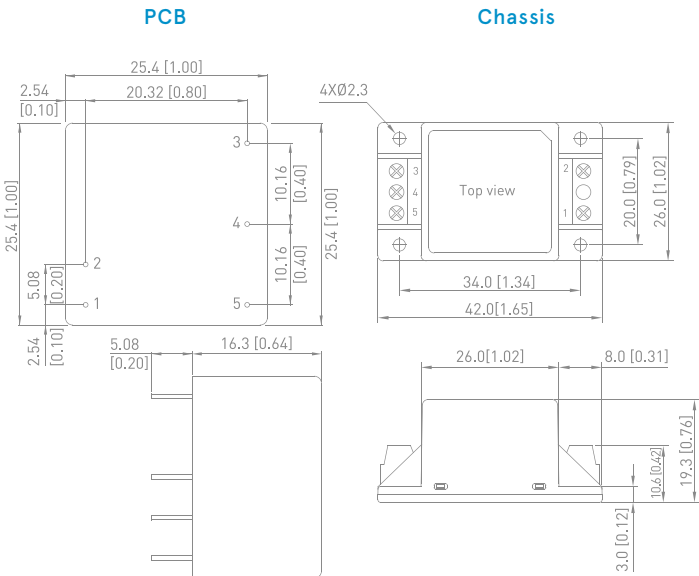

## Pin Connections

| Pin | Function   |
|-----|------------|
| 1   | AC Netural |
| 2   | AC Line    |
| 3   | NC         |
| 4   | -Vout      |
| 5   | +Vout      |

NC= No Connection


## AMF-07 Series | 7W



- Ultra Compact Size 1.52x1.00x0.66"
  - Fully Encapsulated Plastic Case for PCB and Chassis Mounting Version
  - Universal Input 85-264VAC, 90-370VDC, 47-440Hz
  - I/O Isolation 3000VAC with Reinforced Insulation
  - No Min. Load Requirement & Low no-load power consumption
  - Wide Operating Temperature Range
  - Overload/Voltage and Short Circuit Protection
  - EMI Emission EN55014-1/55032 Class B Approved
  - EMS Immunity EN61000-4-2,3,4,5,6,8,11
- Approved
- Safety Approval to UL/cUL/IEC/EN 62368-1, IEC/EN 60335-1 & CE Marking

| Model Number | Input Voltage          | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|------------------------|----------------------|---------------------|------------|
| AMF-07S05    | 85-264VAC<br>90-370VDC | 5                    | 1,400               | 80%        |
| AMF-07S12    |                        | 12                   | 585                 | 84%        |
| AMF-07S15    |                        | 15                   | 467                 | 84%        |
| AMF-07S24    |                        | 24                   | 292                 | 85%        |
| AMF-07S48    |                        | 48                   | 146                 | 84%        |

### Mechanical Dimensions

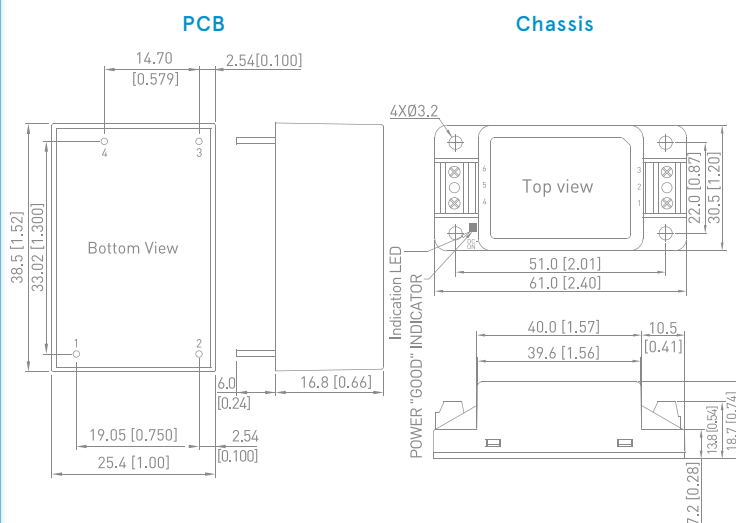

### Pin Connections

| Pin | PCB        | Chassis    |
|-----|------------|------------|
| 1   | AC Netural | AC Netural |
| 2   | AC Line    | No Pin     |
| 3   | -Vout      | AC Line    |
| 4   | +Vout      | -Vout      |
| 5   | -          | No Pin     |
| 6   | -          | +Vout      |



- ## Mechanical Dimensions



| Pin | Function   |
|-----|------------|
| 1   | AC Netural |
| 2   | AC Line    |
| 3   | -Vout      |
| 4   | +Vout      |


## AMF-15 Series | 15W



- Ultra Compact Size 2.52x1.77x0.94 "
- Fully Encapsulated Plastic Case for PCB, Chassis and DIN-Rail Mounting Version
- Universal Input 85-264VAC, 90-370VDC, 47-440Hz
- I/O Isolation 3000VAC with Reinforced Insulation
- No Min. Load Requirement & Low no-load power consumption
- Wide Operating Temperature Range
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN55014-1/55032 Class B Approved
- EMS Immunity EN61000-4-2,3,4,5,6,8,11 Approved
- Safety Approval to UL/cUL/IEC/EN 62368-1, IEC/EN 60335-1 & CE Marking

| Model Number | Input Voltage          | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|------------------------|----------------------|---------------------|------------|
| AMF-15S051   | 85-264VAC<br>90-370VDC | 5.1                  | 3,000               | 80%        |
| AMF-15S12    |                        | 12                   | 1,250               | 85%        |
| AMF-15S15    |                        | 15                   | 1,000               | 86%        |
| AMF-15S24    |                        | 24                   | 625                 | 86%        |
| AMF-15S48    |                        | 48                   | 313                 | 86%        |

### Mechanical Dimensions

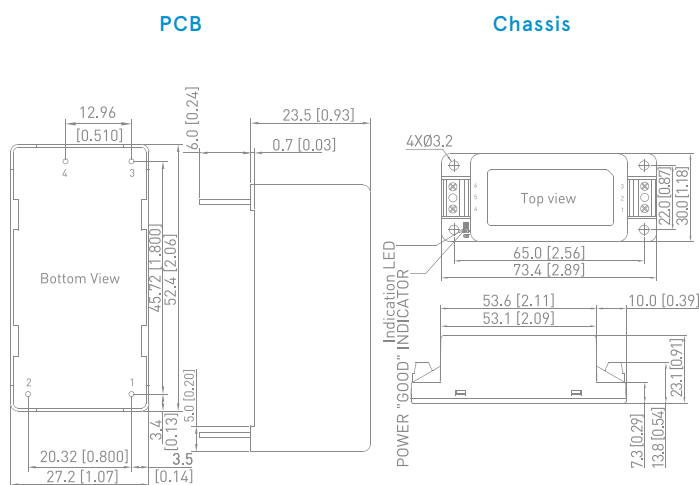

### Pin Connections

| Pin | PCB        | Chassis    |
|-----|------------|------------|
| 1   | AC Netural | AC Netural |
| 2   | AC Line    | No Pin     |
| 3   | -Vout      | AC Line    |
| 4   | +Vout      | +Vout      |
| 5   | -          | No Pin     |
| 6   | -          | -Vout      |


# AGF-15 Series | 15W



- Ultra Compact Size 2.06 x 1.07 x 0.93"
- Fully Encapsulated Module for PCB Mounting
- Universal Input 85-264VAC, 47-440Hz
- I/O Isolation 3000VAC with Reinforced Insulation
- No Min. Load Requirement
- Wide Operating Temperature Range
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55032/14-1 Class B Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- Eco Design, Low No Load Power Consumption ← 100mW
- UL/cUL/IEC/EN 62368-1(60950-1), TUV IEC/EN 60335-1 Safety Approval & CE Marking

| Model Number | Input Voltage           | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|-------------------------|----------------------|---------------------|------------|
| AGF-15S033   | 85-264VAC<br>120-370VDC | 3.3                  | 3,500               | 75%        |
| AGF-15S05    |                         | 5                    | 3,000               | 79%        |
| AGF-15S09    |                         | 9                    | 1,667               | 81%        |
| AGF-15S12    |                         | 12                   | 1,250               | 82%        |
| AGF-15S15    |                         | 15                   | 1,000               | 82%        |
| AGF-15S24    |                         | 24                   | 625                 | 84%        |
| AGF-15S48    |                         | 48                   | 313                 | 82%        |

## Mechanical Dimensions

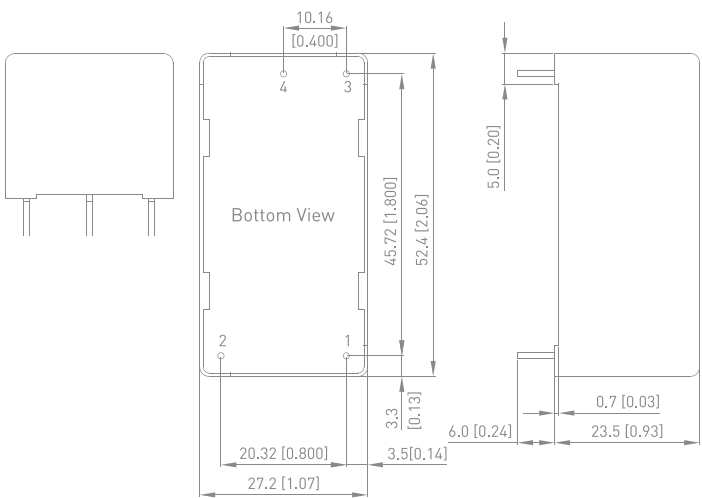

## Pin Connections

| Pin | Function   |
|-----|------------|
| 1   | AC Netural |
| 2   | AC Line    |
| 3   | +Vout      |
| 4   | -Vout      |

NEW

## AMF-30 Series | 30W




- Ultra Compact Size 2.52x1.77x0.94 "
- Fully Encapsulated Plastic Case for PCB, Chassis and DIN-Rail Mounting Version
- Universal Input 85-264VAC, 90-370VDC, 47-440Hz
- I/O Isolation 3000VAC with Reinforced Insulation
- No Min. Load Requirement & Low no-load power consumption
- Wide Operating Temperature Range
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN55014-1/55032 Class B Approved
- EMS Immunity EN61000-4-2,3,4,5,6,8,11

Approved

- Safety Approval to UL/cUL/IEC/EN 62368-1, IEC/EN 60335-1 & CE Marking

| Model Number | Input Voltage          | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|------------------------|----------------------|---------------------|------------|
| AMF-30S051   | 85-264VAC<br>90-370VDC | 5.1                  | 5,000               | 86%        |
| AMF-30S12    |                        | 12                   | 2,500               | 88%        |
| AMF-30S15    |                        | 15                   | 2,000               | 88%        |
| AMF-30S24    |                        | 24                   | 1,250               | 88%        |
| AMF-30S48    |                        | 48                   | 625                 | 88%        |

### Mechanical Dimensions

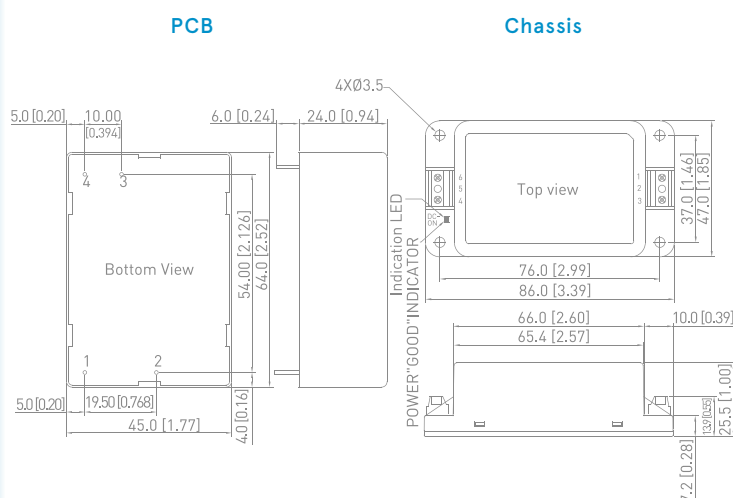

### Pin Connections

| Pin | PCB        | Chassis    |
|-----|------------|------------|
| 1   | AC Line    | AC Line    |
| 2   | AC Netural | No Pin     |
| 3   | +Vout      | AC Netural |
| 4   | -Vout      | +Vout      |
| 5   | -          | No Pin     |
| 6   | -          | -Vout      |

# AMF-60 Series 60W





- Ultra Compact Size 2.99x2.13x1.10 "
- Fully Encapsulated Plastic Case for PCB, Chassis and DIN-Rail Mounting Version
- Universal Input 85-264VAC, 90-370VDC, 47-440Hz
- I/O Isolation 3000VAC with Reinforced Insulation
- No Min. Load Requirement & Low no-load power consumption
- Wide Operating Temperature Range
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN55014-1/55032 Class B Approved
- EMC Immunity EN61000-4-2,3,4,5,6,8,11 Approved
- Safety Approval to UL/cUL/IEC/EN 62368-1, IEC/EN 60335-1 & CE Marking

| Model Number | Input Voltage          | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|------------------------|----------------------|---------------------|------------|
| AMF-60S051   | 85-264VAC<br>90-370VDC | 5.1                  | 10,000              | 87%        |
| AMF-60S12    |                        | 12                   | 5,000               | 89%        |
| AMF-60S15    |                        | 15                   | 4,000               | 89%        |
| AMF-60S24    |                        | 24                   | 2,500               | 89%        |
| AMF-60S48    |                        | 48                   | 1,250               | 89%        |

| Mechanical Dimensions                                                                                                       |  | Pin Connections |            |            |
|-----------------------------------------------------------------------------------------------------------------------------|--|-----------------|------------|------------|
|                                                                                                                             |  | Pin             | PCB        | Chassis    |
| <div><div><p>PCB</p><p>Bottom View</p><p>Top view</p></div><div><p>Chassis</p><p>Top view</p><p>Bottom View</p></div></div> |  | 1               | AC Line    | AC Line    |
|                                                                                                                             |  | 2               | AC Netural | No Pin     |
|                                                                                                                             |  | 3               | -Vout      | AC Netural |
|                                                                                                                             |  | 4               | +Vout      | -Vout      |
|                                                                                                                             |  | 5               | -          | -Vout      |
|                                                                                                                             |  | 6               | -          | +Vout      |
|                                                                                                                             |  | 7               | -          | +Vout      |



# RAILWAY CERTIFIED POWER SOLUTIONS



## MIZI03 Series | 3W



- Industrial Standard DIP-24 Package
- Ultra-wide Input Ranges 9-36VDC, 18-75VDC, 40-160VDC
- I/O Isolation 3000VAC with Reinforced Insulation
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-Voltage, Overload and Short Circuit


## Protection

- EMI Emission EN 55032/11 Class A Approved
- Vibration and Shock/Bump Test EN 61373 Approved
- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety

## Approval &amp; CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MIZI03-24S05  | 24<br>(9 - 36)      | 5                    | 600                 | 80%        |
| MIZI03-24S12  |                     | 12                   | 250                 | 84%        |
| MIZI03-24S15  |                     | 15                   | 200                 | 85%        |
| MIZI03-24D12  |                     | ±12                  | ±125                | 83%        |
| MIZI03-24D15  |                     | ±15                  | ±100                | 84%        |
| MIZI03-48S05  | 48<br>(18 - 75)     | 5                    | 600                 | 80%        |
| MIZI03-48S12  |                     | 12                   | 250                 | 83%        |
| MIZI03-48S15  |                     | 15                   | 200                 | 84%        |
| MIZI03-48D12  |                     | ±12                  | ±125                | 83%        |
| MIZI03-48D15  |                     | ±15                  | ±100                | 83%        |
| MIZI03-110S05 | 110<br>(40 - 160)   | 5                    | 600                 | 80%        |
| MIZI03-110S12 |                     | 12                   | 250                 | 84%        |
| MIZI03-110S15 |                     | 15                   | 200                 | 84%        |
| MIZI03-110D12 |                     | ±12                  | ±125                | 83%        |
| MIZI03-110D15 |                     | ±15                  | ±100                | 85%        |


## Mechanical Dimensions

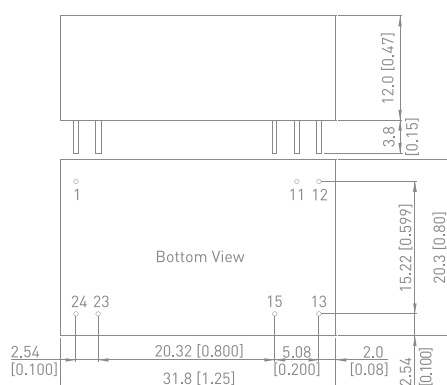

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |

## MKZI10 Series | 10W



- Industrial Standard 2"x1" Package
- Ultra-wide Input Range 9-36VDC, 18-75VDC, 40-160VDC
- I/O Isolation 3000VAC with Reinforced Insulation
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- Remote On/Off, Output Voltage Trim
- Conducted EMI EN 55032/11 Class A Approved
- Passed Temperature Cycling Test (TCT) 500 cycles (with suffix P)
- Passed Temperature and Humidity Bias Test (THB) for 1000 hours (with suffix P)
- Vibration and Shock/Bump Test EN 61373 Approved
- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MKZI10-24S05  | 24<br>( 9 - 36 )    | 5                    | 2,000               | 84%        |
| MKZI10-24S12  |                     | 12                   | 835                 | 86%        |
| MKZI10-24S15  |                     | 15                   | 670                 | 87%        |
| MKZI10-24S24  |                     | 24                   | 417                 | 88%        |
| MKZI10-24D12  |                     | ±12                  | ±417                | 86%        |
| MKZI10-24D15  |                     | ±15                  | ±335                | 87%        |
| MKZI10-48S05  | 48<br>( 18 - 75 )   | 5                    | 2,000               | 85%        |
| MKZI10-48S12  |                     | 12                   | 835                 | 87%        |
| MKZI10-48S15  |                     | 15                   | 670                 | 87%        |
| MKZI10-48S24  |                     | 24                   | 417                 | 86%        |
| MKZI10-48D12  |                     | ±12                  | ±417                | 89%        |
| MKZI10-48D15  |                     | ±15                  | ±335                | 88%        |
| MKZI10-110S05 | 110<br>( 40 - 160 ) | 5                    | 2,000               | 82%        |
| MKZI10-110S12 |                     | 12                   | 835                 | 85%        |
| MKZI10-110S15 |                     | 15                   | 670                 | 85%        |
| MKZI10-110S24 |                     | 24                   | 417                 | 85%        |
| MKZI10-110D12 |                     | ±12                  | ±417                | 86%        |
| MKZI10-110D15 |                     | ±15                  | ±335                | 86%        |


\*To order the converter with heatsink, please add a suffix -HS.

\*To order the converter with package type A, please add a suffix A.

- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

## Mechanical Dimensions

Package Type A

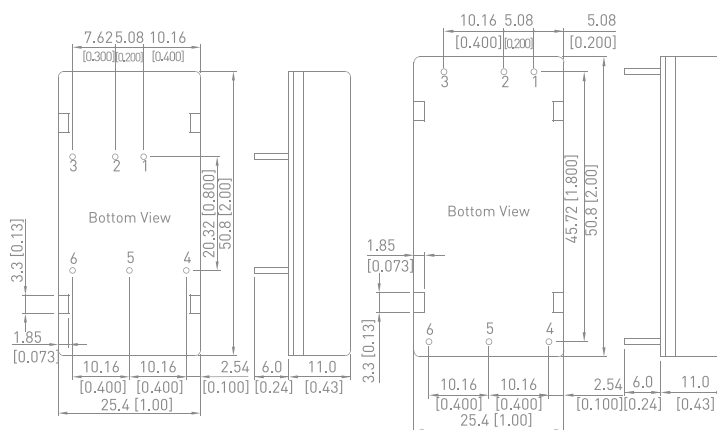

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 4   | +Vout         | +Vout         |
| 5   | Trim          | Common        |
| 6   | -Vout         | -Vout         |

| Pin Connections( For Type A) |               |               |
|------------------------------|---------------|---------------|
| Pin                          | Single        | Dual          |
| 1                            | +Vin          | +Vin          |
| 2                            | -Vin          | -Vin          |
| 3                            | Remote On/Off | Remote On/Off |
| 4                            | +Vout         | +Vout         |
| 5                            | -Vout         | Common        |
| 6                            | Trim          | -Vout         |

## MKZI20 Series | 20W



- Industrial Standard 2"x1" Package
- Ultra-wide Input Range 9-36VDC, 18-75VDC, 40-160VDC
- I/O Isolation 3000VAC with Reinforced Insulation
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- Remote On/Off, Output Voltage Trim
- Conducted EMI EN 55032/11 Class A Approved
- Passed Temperature Cycling Test (TCT) 500 cycles (with suffix P)
- Passed Temperature and Humidity Bias Test (THB) for 1000 hours (with suffix P)
- Vibration and Shock/Bump Test EN 61373 Approved

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MKZI20-24S05  | 24<br>( 9 - 36 )    | 5                    | 4,000               | 87%        |
| MKZI20-24S12  |                     | 12                   | 1,670               | 87%        |
| MKZI20-24S15  |                     | 15                   | 1,330               | 87%        |
| MKZI20-24S24  |                     | 24                   | 833                 | 87%        |
| MKZI20-24D12  |                     | ±12                  | ±833                | 86%        |
| MKZI20-24D15  |                     | ±15                  | ±667                | 86%        |
| MKZI20-48S05  | 48<br>( 18 - 75 )   | 5                    | 4,000               | 87%        |
| MKZI20-48S12  |                     | 12                   | 1,670               | 88%        |
| MKZI20-48S15  |                     | 15                   | 1,330               | 88%        |
| MKZI20-48S24  |                     | 24                   | 833                 | 88%        |
| MKZI20-48D12  |                     | ±12                  | ±833                | 87%        |
| MKZI20-48D15  |                     | ±15                  | ±667                | 87%        |
| MKZI20-110S05 | 110<br>( 40 - 160 ) | 5                    | 4,000               | 84%        |
| MKZI20-110S12 |                     | 12                   | 1,670               | 86%        |
| MKZI20-110S15 |                     | 15                   | 1,330               | 86%        |
| MKZI20-110S24 |                     | 24                   | 833                 | 86%        |
| MKZI20-110D12 |                     | ±12                  | ±833                | 86%        |
| MKZI20-110D15 |                     | ±15                  | ±667                | 86%        |


\*To order the converter with heatsink, please add a suffix -HS.

\*To order the converter with package type A, please add a suffix A.

- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

## Mechanical Dimensions

Package Type A

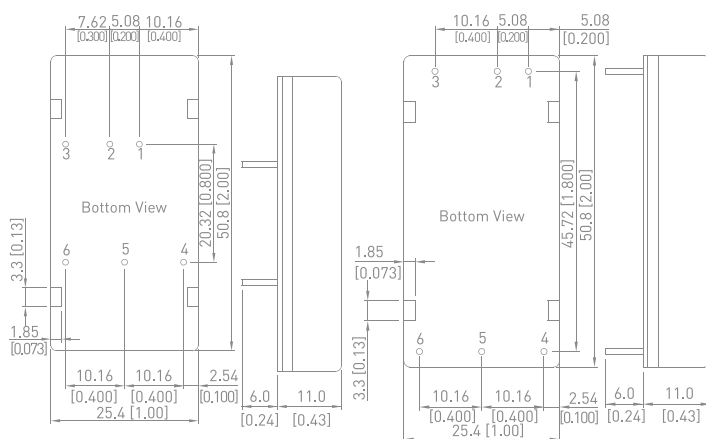

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 4   | +Vout         | +Vout         |
| 5   | Trim          | Common        |
| 6   | -Vout         | -Vout         |

## Pin Connections( For Type A)

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 4   | +Vout         | +Vout         |
| 5   | -Vout         | Common        |
| 6   | Trim          | -Vout         |

# MKZI40 Series | 40W




- Industrial Standard 2"×1" Package
- Ultra-wide Input Range 36-160VDC
- I/O Isolation 3000VAC with Reinforced Insulation
- Excellent Efficiency up to 90%
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Vibration and Shock/Bump Test EN 61373 Approved
- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE

## Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MKZI40-110S05 | 110<br>( 36 - 160 ) | 5                    | 8,000               | 88%        |
| MKZI40-110S12 |                     | 12                   | 3,330               | 89%        |
| MKZI40-110S15 |                     | 15                   | 2,670               | 89%        |
| MKZI40-110S24 |                     | 24                   | 1,670               | 89%        |
| MKZI40-110S54 |                     | 54                   | 741                 | 90%        |
| MKZI40-110D12 |                     | ±12                  | ±1670               | 89%        |
| MKZI40-110D15 |                     | ±15                  | ±1330               | 89%        |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

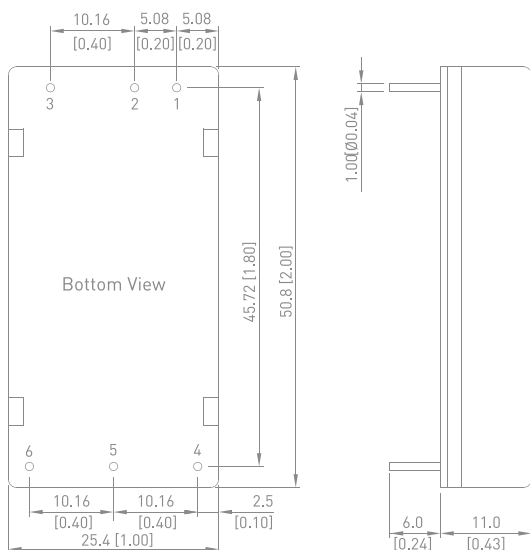

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | Remote On/Off | Remote On/Off |
| 4   | +Vout         | +Vout         |
| 5   | -Vout         | Common        |
| 6   | Trim          | -Vout         |

# MTQZ50 Series | 50W




- Industrial Standard Quarter Brick Package
- Wide Input Range 43-101VDC & 66-160VDC
- Excellent Efficiency up to 92%
- I/O Isolation 3000VAC with Reinforced Insulation
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage/Temp. and Short Circuit Protection
- Remote On/Off, Output Voltage Trim, Output Sensing
- Vibration and Shock/Bump Test EN 61373 Approved
- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MTQZ50-72S05  | 72<br>( 43 - 101 )  | 5                    | 10,000              | 90%        |
| MTQZ50-72S12  |                     | 12                   | 4,170               | 92%        |
| MTQZ50-72S15  |                     | 15                   | 3,330               | 92%        |
| MTQZ50-72S24  |                     | 24                   | 2,080               | 91%        |
| MTQZ50-110S05 | 110<br>( 66 - 160 ) | 5                    | 10,000              | 90%        |
| MTQZ50-110S12 |                     | 12                   | 4,170               | 91%        |
| MTQZ50-110S15 |                     | 15                   | 3,330               | 92%        |
| MTQZ50-110S24 |                     | 24                   | 2,080               | 91%        |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

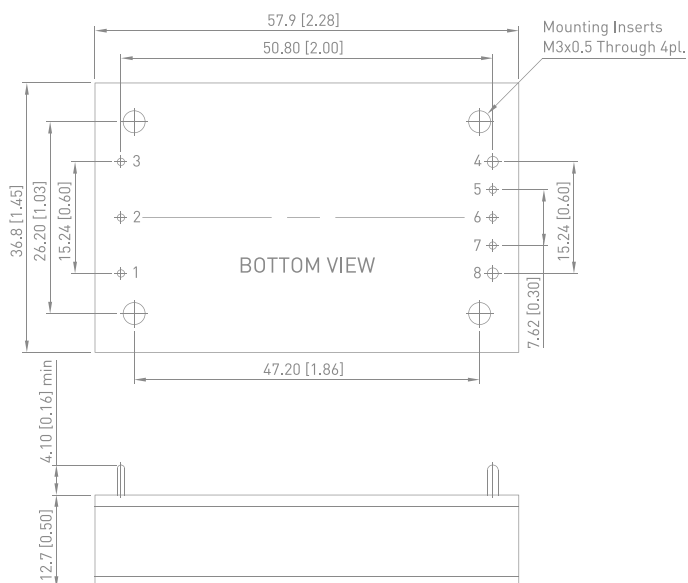

## Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | +Vin          |
| 2   | Remote On/Off |
| 3   | -Vin          |
| 4   | -Vout         |
| 5   | * -Sense      |
| 6   | Trim          |
| 7   | * +Sense      |
| 8   | +Vout         |

\*If remote sense not used the +sense should be connected to +output and -sense should be connected to -output  
Maximum output deviation is 10% inclusive of trim

NEW

# MRZI75 Series | 75W



- Industrial Standard Quarter Brick Package
- Ultra-wide Input Range 36-160VDC
- Excellent Efficiency up to 91%
- I/O Isolation 2000VAC with Reinforced Insulation
- Temperature Cycle Test (TCT) more than 1000 Cycles

Passed

- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage/Temp. and Short Circuit

Protection

- Remote On/Off Control, Output Voltage Trim, Output Sense
- Vibration and Shock/Bump Test EN 61373 Approved
- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30


Approved

- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MRZI75-110S05 | 110<br>(36 - 160)   | 5                    | 15,000              | 89%        |
| MRZI75-110S12 |                     | 12                   | 6,250               | 91%        |
| MRZI75-110S15 |                     | 15                   | 5,000               | 91%        |
| MRZI75-110S24 |                     | 24                   | 3,125               | 90%        |
| MRZI75-110S54 |                     | 54                   | 1,390               | 89%        |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

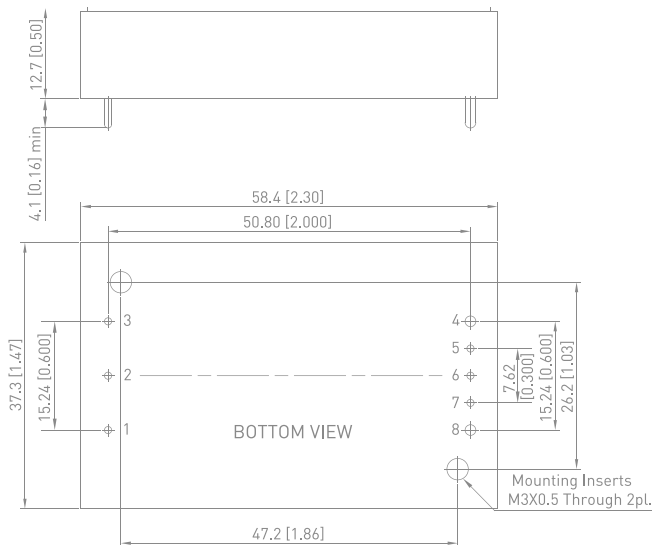

## Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | +Vin          |
| 2   | Remote On/Off |
| 3   | -Vin          |
| 4   | -Vout         |
| 5   | * -Sense      |
| 6   | Trim          |
| 7   | * +Sense      |
| 8   | +Vout         |

\*If remote sense not used the +sense should be connected to +output and -sense should be connected to -output  
Maximum output deviation is 10% inclusive of trimction

# MRZI100 Series | 100W




| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MRZI100-110S05 | 110<br>(36 - 160)   | 5                    | 20,000              | 91.5%      |
| MRZI100-110S12 |                     | 12                   | 8,400               | 91%        |
| MRZI100-110S15 |                     | 15                   | 6,700               | 90.5%      |
| MRZI100-110S24 |                     | 24                   | 4,200               | 89%        |
| MRZI100-110S54 |                     | 54                   | 1,850               | 89%        |

\*To order the converter with heatsink, please add a suffix -HS.



- Industrial Standard Quarter Brick Package
- Ultra-wide Input Range 36-160VDC
- I/O Isolation 2000VAC with Reinforced Insulation
- Excellent Efficiency up to 91.5%
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage/Temp. and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim, Output Sense
- Vibration and Shock/Bump Test EN 61373 Approved
- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

## Mechanical Dimensions

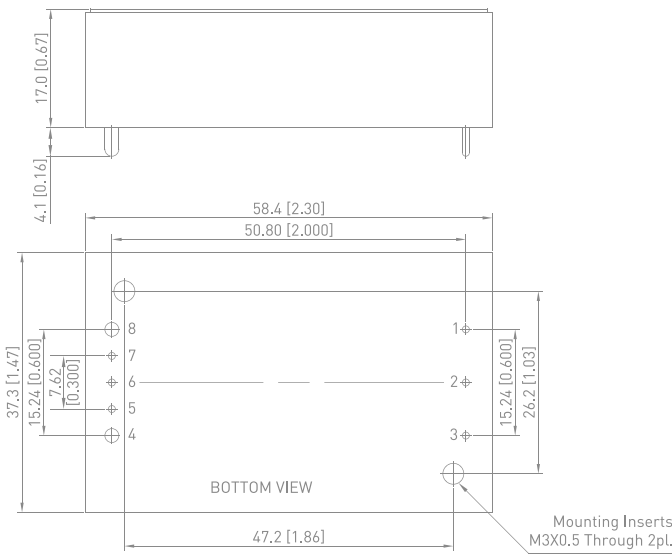

## Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | +Vin          |
| 2   | Remote On/Off |
| 3   | -Vin          |
| 4   | -Vout         |
| 5   | * -Sense      |
| 6   | Trim          |
| 7   | * +Sense      |
| 8   | +Vout         |

\*If remote sense not used the +sense should be connected to +output and -sense should be connected to -output  
Maximum output deviation is 10% inclusive of trim

# MRZI150 Series | 150W




- Industrial Standard Quarter Brick Package
- Ultra-wide Input Range 36-160VDC
- I/O Isolation 2000VAC with Reinforced Insulation
- Excellent Efficiency up to 90%
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage/Temp. and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim, Output Sense
- Vibration and Shock/Bump Test EN 61373 Approved
- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MRZI150-110S05 | 110<br>(36 - 160)   | 5                    | 27,000              | 90%        |
| MRZI150-110S12 |                     | 12                   | 12,500              | 90%        |
| MRZI150-110S15 |                     | 15                   | 10,000              | 89%        |
| MRZI150-110S24 |                     | 24                   | 6,250               | 88%        |
| MRZI150-110S54 |                     | 54                   | 2,780               | 88.5%      |

\*To order the converter with heatsink, please add a suffix -HS.

## Mechanical Dimensions

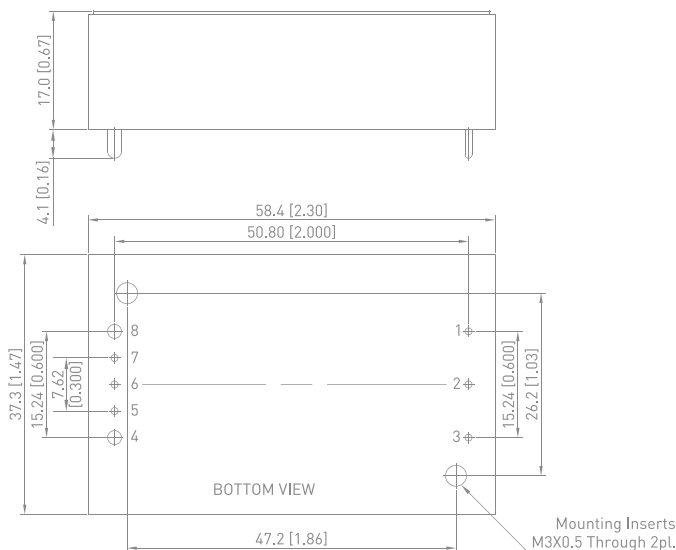

## Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | +Vin          |
| 2   | Remote On/Off |
| 3   | -Vin          |
| 4   | -Vout         |
| 5   | * -Sense      |
| 6   | Trim          |
| 7   | * +Sense      |
| 8   | +Vout         |

\*If remote sense not used the +sense should be connected to +output and -sense should be connected to -output  
Maximum output deviation is 10% inclusive of trim

NEW

# MRHI150 Series | 150W




| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MRHI150-24S05 | 24<br>(9 - 36)      | 5                    | 30,000              | 87.5%      |
| MRHI150-24S12 |                     | 12                   | 12,500              | 90%        |
| MRHI150-24S15 |                     | 15                   | 10,000              | 90%        |
| MRHI150-24S24 |                     | 24                   | 6,250               | 90%        |
| MRHI150-24S54 |                     | 54                   | 2,780               | 90%        |



- Industry standard Half Brick size
- Wide input voltage range 9-36VDC
- Excellent efficiency of 90%
- Reinforced insulation, isolation voltage 1680VAC
- Wide Operating Temperature Range
- Passed Temperature Cycling Test (TCT) 500 cycles
- No minimum load required
- Under-voltage, Overload/Voltage/Temp. and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim, Output Sense
- Vibration and Shock/Bump Test EN 61373 Approved
- Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- Railway EMC Standard EN 50121-3-2 Approved
- Railway Certified EN 50155 (IEC60571) Approved
- Fire Protection Test EN 45545-2 Approved
- Operating Altitude 5000m
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking



Mechanical Dimensions

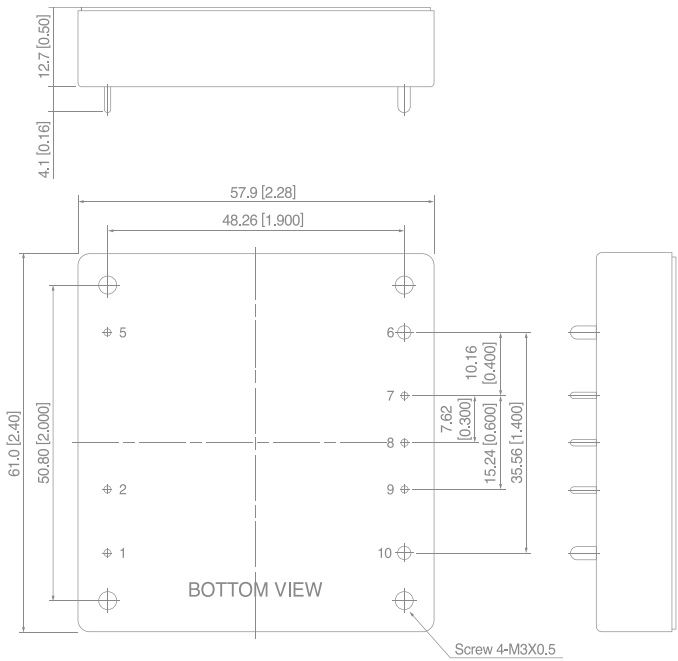

The screw locked torque: MAX 5.0 kgf-cm/0.49 N-m

Pin Connections

| Pin | Function      |
|-----|---------------|
| 1   | +Vin          |
| 2   | Remote On/Off |
| 5   | -Vin          |
| 6   | -Vout         |
| 7   | * -Sense      |
| 8   | Trim          |
| 9   | * +Sense      |
| 10  | +Vout         |

NC: No Connection

\*If remote sense not used the +sense should be connected  
to +output and -sense should be connected to -output  
Maximum output deviation is 10% inclusive of trim



# ULTRA-HIGH ISOLATION POWER SOLUTIONS

Input

Isolation  
5K VAC / 60sec



Output


Reinforced Insulation

## MA01-HI Series | 1W



- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- Ultra-high I/O Isolation 5200VDC
- Wide Operating Temperature Range
- Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MA01-05S033HI  | 5<br>(4.95-5.05)    | 3.3                  | 303                 | 70%        |
| MA01-05S05HI   |                     | 5                    | 200                 | 70%        |
| MA01-05S09HI   |                     | 9                    | 111                 | 75%        |
| MA01-05S12HI   |                     | 12                   | 84                  | 77%        |
| MA01-05S15HI   |                     | 15                   | 66                  | 78%        |
| MA01-05D05HI   |                     | ±5                   | ±100                | 71%        |
| MA01-05D09HI   |                     | ±9                   | ±56                 | 75%        |
| MA01-05D12HI   |                     | ±12                  | ±42                 | 77%        |
| MA01-05D15HI   |                     | ±15                  | ±33                 | 78%        |
| MA01-05A1509HI |                     | 15                   | 33                  | 76%        |
|                |                     | -9                   | -55                 |            |
| MA01-12S033HI  | 12<br>(11.88-12.12) | 3.3                  | 303                 | 71%        |
| MA01-12S05HI   |                     | 5                    | 200                 | 71%        |
| MA01-12S09HI   |                     | 9                    | 111                 | 76%        |
| MA01-12S12HI   |                     | 12                   | 84                  | 78%        |
| MA01-12S15HI   |                     | 15                   | 66                  | 79%        |
| MA01-12D05HI   |                     | ±5                   | ±100                | 72%        |
| MA01-12D09HI   |                     | ±9                   | ±56                 | 76%        |
| MA01-12D12HI   |                     | ±12                  | ±42                 | 78%        |
| MA01-12D15HI   |                     | ±15                  | ±33                 | 79%        |
| MA01-12A1509HI |                     | 15                   | 33                  | 77%        |
|                |                     | -9                   | -55                 |            |
| MA01-15S033HI  | 15<br>(14.85-15.15) | 3.3                  | 303                 | 70%        |
| MA01-15S05HI   |                     | 5                    | 200                 | 70%        |
| MA01-15S09HI   |                     | 9                    | 111                 | 75%        |
| MA01-15S12HI   |                     | 12                   | 84                  | 75%        |
| MA01-15S15HI   |                     | 15                   | 66                  | 79%        |
| MA01-15D05HI   |                     | ±5                   | ±100                | 71%        |
| MA01-15D09HI   |                     | ±9                   | ±56                 | 75%        |
| MA01-15D12HI   |                     | ±12                  | ±42                 | 78%        |
| MA01-15D15HI   |                     | ±15                  | ±33                 | 79%        |
| MA01-15A1509HI |                     | 15                   | 33                  | 76%        |
|                |                     | -9                   | -55                 |            |
| MA01-24S033HI  | 24<br>(23.76-24.24) | 3.3                  | 303                 | 70%        |
| MA01-24S05HI   |                     | 5                    | 200                 | 70%        |
| MA01-24S09HI   |                     | 9                    | 111                 | 75%        |
| MA01-24S12HI   |                     | 12                   | 84                  | 78%        |
| MA01-24S15HI   |                     | 15                   | 66                  | 80%        |
| MA01-24D05HI   |                     | ±5                   | ±100                | 71%        |
| MA01-24D09HI   |                     | ±9                   | ±56                 | 75%        |
| MA01-24D12HI   |                     | ±12                  | ±42                 | 77%        |
| MA01-24D15HI   |                     | ±15                  | ±33                 | 78%        |
| MA01-24A1509HI |                     | 15                   | 33                  | 75%        |
|                |                     | -9                   | -55                 |            |
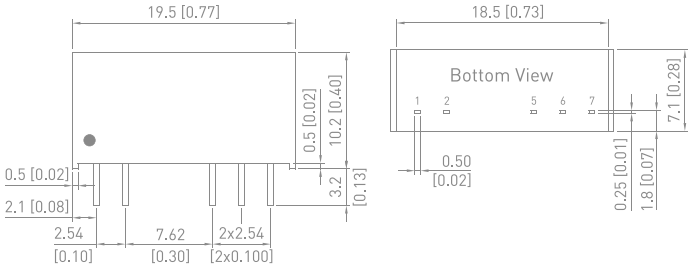
| Mechanical Dimensions                                                             | Pin Connections |        |        |
|-----------------------------------------------------------------------------------|-----------------|--------|--------|
|  | Pin             | Single | Dual   |
|                                                                                   | 1               | +Vin   | +Vin   |
|                                                                                   | 2               | -Vin   | -Vin   |
|                                                                                   | 5               | -Vout  | -Vout  |
|                                                                                   | 6               | No Pin | Common |
|                                                                                   | 7               | +Vout  | +Vout  |
|                                                                                   |                 |        |        |


MAEU01-HI Series | 1W



- Industrial Standard SIP-7 Package
- Ultra-high I/O Isolation 8000VDC with Reinforced Insulation, rate for 480Vrms working voltage
- Wide Operating Temperature Range
- Short Circuit Protection
- UL/cUL/IEC/EN 62368-1 Safety Approval

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MAEU01-05S05HI | 5<br>(4.5 - 5.5)    | 5                    | 200                 | 79%        |
| MAEU01-05S12HI |                     | 12                   | 84                  | 80%        |
| MAEU01-05S15HI |                     | 15                   | 68                  | 81%        |
| MAEU01-12S05HI | 12<br>(10.8 - 13.2) | 5                    | 200                 | 79%        |
| MAEU01-12S12HI |                     | 12                   | 84                  | 81%        |
| MAEU01-12S15HI |                     | 15                   | 68                  | 79%        |
| MAEU01-24S05HI | 24<br>(21.6 - 26.4) | 5                    | 200                 | 76%        |
| MAEU01-24S12HI |                     | 12                   | 84                  | 79%        |
| MAEU01-24S15HI |                     | 15                   | 68                  | 79%        |


Mechanical Dimensions

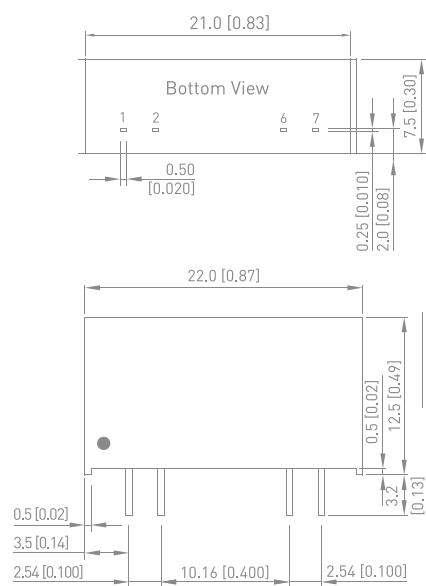

Pin Connections


| Pin | Function |
|-----|----------|
| 1   | +Vin     |
| 2   | -Vin     |
| 6   | -Vout    |
| 7   | +Vout    |

# MAEU02-HI Series | 2W



- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- Ultra-high I/O Isolation 5700VDC
- Wide Operating Temperature Range
- Short Circuit Protection
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number     | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|------------------|---------------------|----------------------|---------------------|------------|
| MAEU02-05S033HI  | 5<br>(4.95-5.05)    | 3.3                  | 500                 | 74%        |
| MAEU02-05S05HI   |                     | 5                    | 400                 | 80%        |
| MAEU02-05S09HI   |                     | 9                    | 222                 | 81%        |
| MAEU02-05S12HI   |                     | 12                   | 168                 | 82%        |
| MAEU02-05S15HI   |                     | 15                   | 132                 | 79%        |
| MAEU02-05D05HI   |                     | ±5                   | ±200                | 78%        |
| MAEU02-05D09HI   |                     | ±9                   | ±112                | 80%        |
| MAEU02-05D12HI   |                     | ±12                  | ±84                 | 80%        |
| MAEU02-05D15HI   |                     | ±15                  | ±66                 | 79%        |
| MAEU02-05A1509HI |                     | 15<br>-9             | 66<br>-110          | 80%        |
| MAEU02-12S033HI  | 12<br>(11.88-12.12) | 3.3                  | 500                 | 76%        |
| MAEU02-12S05HI   |                     | 5                    | 400                 | 79%        |
| MAEU02-12S09HI   |                     | 9                    | 222                 | 81%        |
| MAEU02-12S12HI   |                     | 12                   | 168                 | 83%        |
| MAEU02-12S15HI   |                     | 15                   | 132                 | 82%        |
| MAEU02-12D05HI   |                     | ±5                   | ±200                | 79%        |
| MAEU02-12D09HI   |                     | ±9                   | ±112                | 81%        |
| MAEU02-12D12HI   |                     | ±12                  | ±84                 | 82%        |
| MAEU02-12D15HI   |                     | ±15                  | ±66                 | 83%        |
| MAEU02-12A1509HI |                     | 15<br>-9             | 66<br>-110          | 81%        |
| MAEU02-15S033HI  | 15<br>(14.85-15.15) | 3.3                  | 500                 | 77%        |
| MAEU02-15S05HI   |                     | 5                    | 400                 | 79%        |
| MAEU02-15S09HI   |                     | 9                    | 222                 | 83%        |
| MAEU02-15S12HI   |                     | 12                   | 168                 | 83%        |
| MAEU02-15S15HI   |                     | 15                   | 132                 | 85%        |
| MAEU02-15D05HI   |                     | ±5                   | ±200                | 81%        |
| MAEU02-15D09HI   |                     | ±9                   | ±112                | 84%        |
| MAEU02-15D12HI   |                     | ±12                  | ±84                 | 82%        |
| MAEU02-15D15HI   |                     | ±15                  | ±66                 | 82%        |
| MAEU02-15A1509HI |                     | 15<br>-9             | 66<br>-110          | 83%        |
| MAEU02-24S033HI  | 24<br>(23.76-24.24) | 3.3                  | 500                 | 76%        |
| MAEU02-24S05HI   |                     | 5                    | 400                 | 77%        |
| MAEU02-24S09HI   |                     | 9                    | 222                 | 81%        |
| MAEU02-24S12HI   |                     | 12                   | 168                 | 82%        |
| MAEU02-24S15HI   |                     | 15                   | 132                 | 82%        |
| MAEU02-24D05HI   |                     | ±5                   | ±200                | 77%        |
| MAEU02-24D09HI   |                     | ±9                   | ±112                | 81%        |
| MAEU02-24D12HI   |                     | ±12                  | ±84                 | 81%        |
| MAEU02-24D15HI   |                     | ±15                  | ±66                 | 80%        |
| MAEU02-24A1509HI |                     | 15<br>-9             | 66<br>-110          | 81%        |
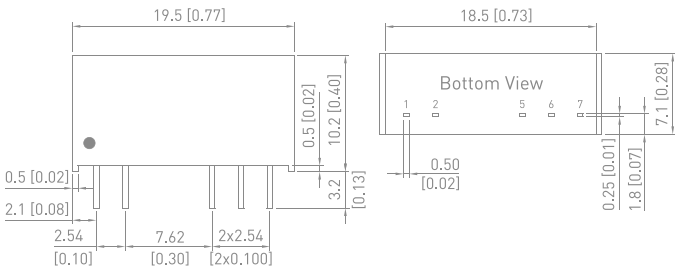
| Mechanical Dimensions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Pin Connections |        |        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------|--------|
|  <p>The mechanical drawing shows two views of a component. The top view is a rectangle with a width of 19.5 mm [0.77] and a height of 10.2 mm [0.40]. It has a central cutout with a width of 7.62 mm [0.30] and a height of 3.2 mm [0.13]. The bottom view is a rectangle with a width of 18.5 mm [0.73] and a height of 7.1 mm [0.28]. It shows seven pins numbered 1 through 7. Pin 1 is on the left, pin 2 is next to it, pin 5 is in the center, pin 6 is next to pin 5, and pin 7 is on the right. Dimensions for the pins are: pin 1 width 0.5 mm [0.02], pin 2 width 2.1 mm [0.08], pin 5 width 0.5 mm [0.02], pin 6 width 0.25 mm [0.01], pin 7 width 1.8 mm [0.07], and pin 7 height 7.1 mm [0.28].</p> | Pin             | Single | Dual   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1               | +Vin   | +Vin   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2               | -Vin   | -Vin   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 5               | -Vout  | -Vout  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 6               | No Pin | Common |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 7               | +Vout  | +Vout  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                 |        |        |


MSCEU01-HI Series | 1W



- Industrial Standard SMD Package
- Ultra-high I/O Isolation 8000VDC with Reinforced Insulation, rate for 480Vrms Working Voltage
- Wide Operating Temperature Range
- Short Circuit Protection
- UL/cUL/IEC/EN 62368-1 Safety Approval

| Model Number    | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|-----------------|---------------------|----------------------|---------------------|------------|
| MSCEU01-05S05HI | 5<br>(4.5 - 5.5)    | 5                    | 200                 | 76%        |
| MSCEU01-05S12HI |                     | 12                   | 84                  | 80%        |
| MSCEU01-05S15HI |                     | 15                   | 68                  | 83%        |
| MSCEU01-05D12HI |                     | ±12                  | ±42                 | 80%        |
| MSCEU01-05D15HI |                     | ±15                  | ±33                 | 84%        |
| MSCEU01-12S05HI | 12<br>(10.8 - 13.2) | 5                    | 200                 | 76%        |
| MSCEU01-12S12HI |                     | 12                   | 84                  | 79%        |
| MSCEU01-12S15HI |                     | 15                   | 68                  | 80%        |
| MSCEU01-12D12HI |                     | ±12                  | ±42                 | 79%        |
| MSCEU01-12D15HI |                     | ±15                  | ±33                 | 80%        |
| MSCEU01-24S05HI | 24<br>(21.6 - 26.4) | 5                    | 200                 | 76%        |
| MSCEU01-24S12HI |                     | 12                   | 84                  | 80%        |
| MSCEU01-24S15HI |                     | 15                   | 68                  | 80%        |
| MSCEU01-24D12HI |                     | ±12                  | ±42                 | 80%        |
| MSCEU01-24D15HI |                     | ±15                  | ±33                 | 80%        |

Mechanical Dimensions

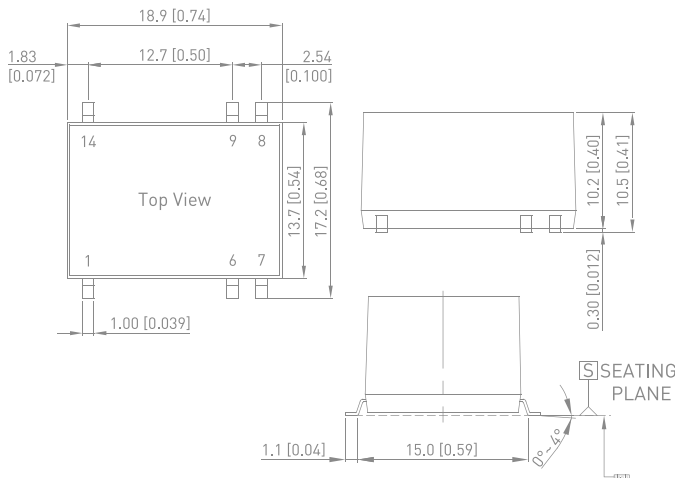

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 6   | NC     | Common |
| 7   | NC     | -Vout  |
| 8   | +Vout  | +Vout  |
| 9   | -Vout  | Common |
| 14  | +Vin   | +Vin   |


# MDEU02-HI Series | 2W



- Industrial Standard DIP-16 Package
- Unregulated Output Voltage
- Ultra-high I/O Isolation 8000VDC with Reinforced Insulation,rate for 300Vrms Working Voltage
- Wide Operating Temperature Range
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MDEU02-05S05HI | 5<br>(4.5 - 5.5)    | 5                    | 400                 | 65%        |
| MDEU02-05S12HI |                     | 12                   | 165                 | 65%        |
| MDEU02-05S15HI |                     | 15                   | 133                 | 66%        |
| MDEU02-05D12HI |                     | ±12                  | ±83                 | 72%        |
| MDEU02-05D15HI |                     | ±15                  | ±66                 | 73%        |
| MDEU02-12S05HI | 12<br>(10.8 - 13.2) | 5                    | 400                 | 65%        |
| MDEU02-12S12HI |                     | 12                   | 165                 | 65%        |
| MDEU02-12S15HI |                     | 15                   | 133                 | 66%        |
| MDEU02-12D12HI |                     | ±12                  | ±83                 | 74%        |
| MDEU02-12D15HI |                     | ±15                  | ±66                 | 75%        |
| MDEU02-24S05HI | 24<br>(21.6 - 26.4) | 5                    | 400                 | 65%        |
| MDEU02-24S12HI |                     | 12                   | 165                 | 65%        |
| MDEU02-24S15HI |                     | 15                   | 133                 | 66%        |
| MDEU02-24D12HI |                     | ±12                  | ±83                 | 74%        |
| MDEU02-24D15HI |                     | ±15                  | ±66                 | 75%        |

## Mechanical Dimensions

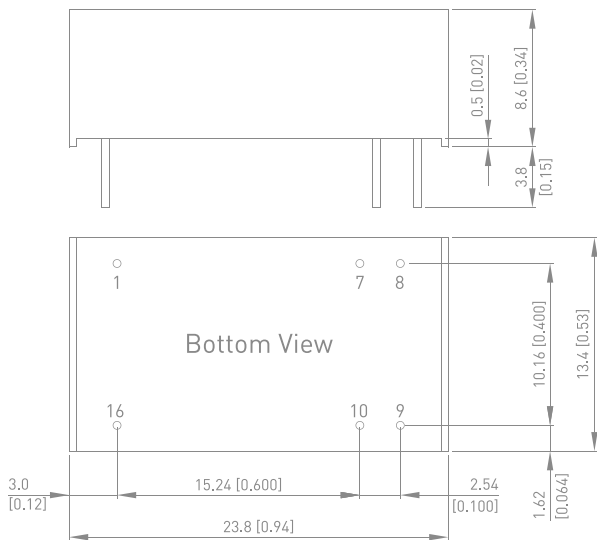

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC= No Connection



- ## Mechanical Dimensions



| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | +Vin   | +Vin   |
| 10  | No Pin | Common |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


# MIE03-HI Series | 3W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- Ultra-high I/O Isolation 9000VDC with Reinforced Insulation, rate for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-Voltage, Overload/Voltage and Short Circuit Protection
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MIE03-05S05HI  | 5<br>(4.5 - 9)      | 5                    | 700                 | 82%        |
| MIE03-05S058HI |                     | 5.8                  | 600                 | 82%        |
| MIE03-05S12HI  |                     | 12                   | 290                 | 83%        |
| MIE03-05S15HI  |                     | 15                   | 235                 | 84%        |
| MIE03-05S24HI  |                     | 24                   | 146                 | 83%        |
| MIE03-05D12HI  | ±12                 | ±12                  | ±145                | 84%        |
| MIE03-05D15HI  |                     | ±15                  | ±115                | 84%        |
| MIE03-12S05HI  | 12<br>(9 - 18)      | 5                    | 700                 | 82%        |
| MIE03-12S12HI  |                     | 12                   | 290                 | 86%        |
| MIE03-12S15HI  |                     | 15                   | 235                 | 87%        |
| MIE03-12S24HI  |                     | 24                   | 146                 | 86%        |
| MIE03-12D12HI  |                     | ±12                  | ±145                | 87%        |
| MIE03-12D15HI  | ±15                 | ±15                  | ±115                | 87%        |
| MIE03-24S05HI  |                     | 5                    | 700                 | 82%        |
| MIE03-24S12HI  | 24<br>(18 - 36)     | 12                   | 290                 | 85%        |
| MIE03-24S15HI  |                     | 15                   | 235                 | 87%        |
| MIE03-24S24HI  |                     | 24                   | 146                 | 86%        |
| MIE03-24D12HI  | ±12                 | ±12                  | ±145                | 87%        |
| MIE03-24D15HI  |                     | ±15                  | ±115                | 86%        |
| MIE03-48S05HI  | 48<br>(36 - 75)     | 5                    | 700                 | 82%        |
| MIE03-48S12HI  |                     | 12                   | 290                 | 85%        |
| MIE03-48S15HI  |                     | 15                   | 235                 | 85%        |
| MIE03-48S24HI  |                     | 24                   | 146                 | 83%        |
| MIE03-48D12HI  |                     | ±12                  | ±145                | 84%        |
| MIE03-48D15HI  | ±15                 | ±15                  | ±115                | 84%        |

## Mechanical Dimensions

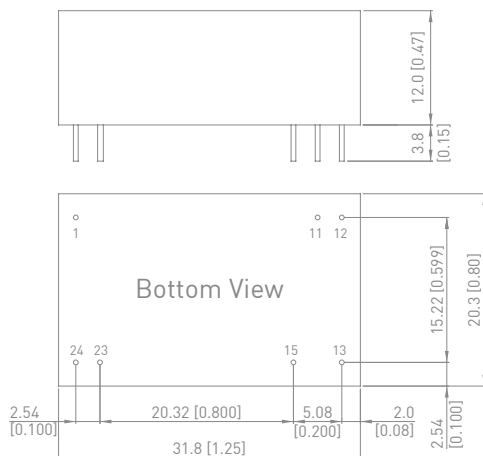

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


MIEI03-HI Series | 3W



- Industrial Standard DIP-24 Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- Ultra-high Isolation 8000VDC with Reinforced Insulation, rate for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- Overload and Short Circuit Protection
- Designed-in Conducted EMI meets EN 55032 Class A
- UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MIEI03-24S05HI | 24<br>( 9 ~ 40 )    | 5                    | 600                 | 77%        |
| MIEI03-24S12HI |                     | 12                   | 250                 | 82%        |
| MIEI03-24D12HI |                     | ±12                  | ±125                | 83%        |
| MIEI03-24D15HI |                     | ±15                  | ±100                | 83%        |
| MIEI03-48S05HI | 48<br>( 18 ~ 80 )   | 5                    | 600                 | 77%        |
| MIEI03-48S12HI |                     | 12                   | 250                 | 82%        |
| MIEI03-48D12HI |                     | ±12                  | ±125                | 83%        |
| MIEI03-48D15HI |                     | ±15                  | ±100                | 83%        |

Mechanical Dimensions

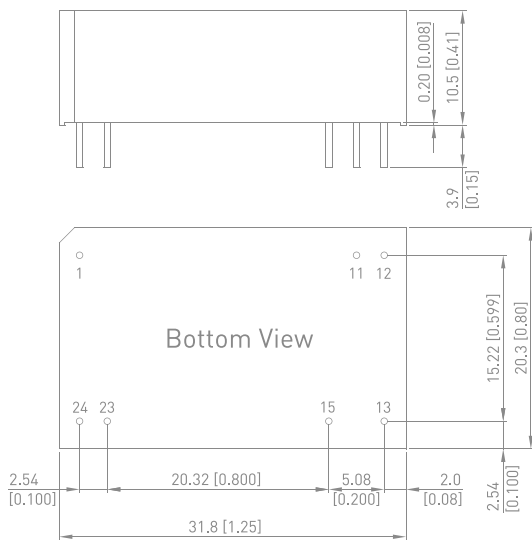

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


# MIE06-HI Series | 6W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- Ultra-high I/O Isolation 9000VDC with Reinforced Insulation, rate for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-Voltage, Overload/Voltage and Short Circuit Protection
- Conducted EMI EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MIE06-12S05HI | 12<br>(9 - 18)      | 5                    | 1,200               | 83%        |
| MIE06-12S12HI |                     | 12                   | 500                 | 86%        |
| MIE06-12S15HI |                     | 15                   | 400                 | 86%        |
| MIE06-12S24HI |                     | 24                   | 250                 | 86%        |
| MIE06-12D12HI |                     | ±12                  | ±250                | 87%        |
| MIE06-12D15HI |                     | ±15                  | ±200                | 87%        |
| MIE06-24S05HI | 24<br>(18 - 36)     | 5                    | 1,200               | 83%        |
| MIE06-24S12HI |                     | 12                   | 500                 | 86%        |
| MIE06-24S15HI |                     | 15                   | 400                 | 87%        |
| MIE06-24S24HI |                     | 24                   | 250                 | 85%        |
| MIE06-24D12HI |                     | ±12                  | ±250                | 86%        |
| MIE06-24D15HI |                     | ±15                  | ±200                | 87%        |
| MIE06-48S05HI | 48<br>(36 - 75)     | 5                    | 1,200               | 83%        |
| MIE06-48S12HI |                     | 12                   | 500                 | 86%        |
| MIE06-48S15HI |                     | 15                   | 400                 | 89%        |
| MIE06-48S24HI |                     | 24                   | 250                 | 86%        |
| MIE06-48D12HI |                     | ±12                  | ±250                | 87%        |
| MIE06-48D15HI |                     | ±15                  | ±200                | 88%        |

## Mechanical Dimensions

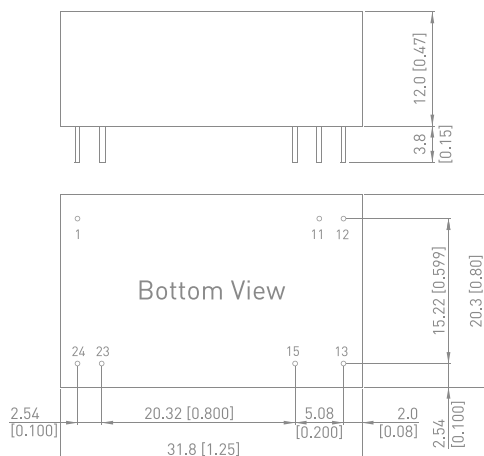

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


MIE10-HI Series | 10W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- Ultra-high I/O Isolation 9000VDC with reinforced Insulation, rate for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55032 Class A Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MIE10-12S033HI | 12<br>(9 - 18)      | 3.3                  | 2,700               | 81%        |
| MIE10-12S05HI  |                     | 5                    | 2,000               | 83%        |
| MIE10-12S051HI |                     | 5.1                  | 2,000               | 83%        |
| MIE10-12S12HI  |                     | 12                   | 833                 | 86%        |
| MIE10-12S15HI  |                     | 15                   | 666                 | 88%        |
| MIE10-12S24HI  |                     | 24                   | 416                 | 88%        |
| MIE10-12D12HI  |                     | ±12                  | ±416                | 88%        |
| MIE10-12D15HI  |                     | ±15                  | ±333                | 87%        |
| MIE10-24S033HI | 24<br>(18 - 36)     | 3.3                  | 2,700               | 81%        |
| MIE10-24S05HI  |                     | 5                    | 2,000               | 84%        |
| MIE10-24S051HI |                     | 5.1                  | 2,000               | 84%        |
| MIE10-24S12HI  |                     | 12                   | 833                 | 87%        |
| MIE10-24S15HI  |                     | 15                   | 666                 | 88%        |
| MIE10-24S24HI  |                     | 24                   | 416                 | 88%        |
| MIE10-24D12HI  |                     | ±12                  | ±416                | 88%        |
| MIE10-24D15HI  |                     | ±15                  | ±333                | 87%        |
| MIE10-48S033HI | 48<br>(36 - 75)     | 3.3                  | 2,700               | 81%        |
| MIE10-48S05HI  |                     | 5                    | 2,000               | 84%        |
| MIE10-48S051HI |                     | 5.1                  | 2,000               | 84%        |
| MIE10-48S12HI  |                     | 12                   | 833                 | 87%        |
| MIE10-48S15HI  |                     | 15                   | 666                 | 88%        |
| MIE10-48S24HI  |                     | 24                   | 416                 | 87%        |
| MIE10-48D12HI  |                     | ±12                  | ±416                | 87%        |
| MIE10-48D15HI  |                     | ±15                  | ±333                | 87%        |

Mechanical Dimensions

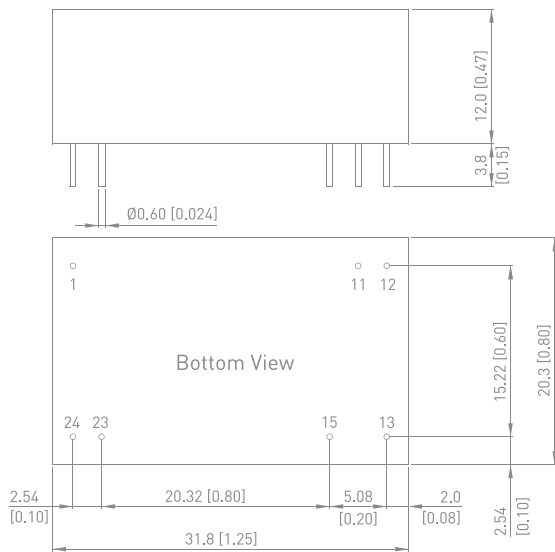

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


## MKE15-HI Series | 15W



- Industrial Standard 2"x1" Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- Ultra-high I/O Isolation 8000VDC with Reinforced Insulation, rated for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- EMI Emission EN55032 Class A Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MKE15-12S05HI  | 12<br>(9 - 18)      | 5                    | 3,000               | 85%        |
| MKE15-12S051HI |                     | 5.1                  | 3,000               | 85%        |
| MKE15-12S12HI  |                     | 12                   | 1,250               | 88%        |
| MKE15-12S15HI  |                     | 15                   | 1,000               | 88%        |
| MKE15-12S24HI  |                     | 24                   | 625                 | 88%        |
| MKE15-12D12HI  |                     | ±12                  | ±625                | 88%        |
| MKE15-12D15HI  |                     | ±15                  | ±500                | 89%        |
| MKE15-24S05HI  | 24<br>(18 - 36)     | 5                    | 3,000               | 87%        |
| MKE15-24S051HI |                     | 5.1                  | 3,000               | 87%        |
| MKE15-24S12HI  |                     | 12                   | 1,250               | 88%        |
| MKE15-24S15HI  |                     | 15                   | 1,000               | 89%        |
| MKE15-24S24HI  |                     | 24                   | 625                 | 90%        |
| MKE15-24D12HI  |                     | ±12                  | ±625                | 90%        |
| MKE15-24D15HI  |                     | ±15                  | ±500                | 89%        |
| MKE15-48S05HI  | 48<br>(36 - 75)     | 5                    | 3,000               | 87%        |
| MKE15-48S051HI |                     | 5.1                  | 3,000               | 87%        |
| MKE15-48S12HI  |                     | 12                   | 1,250               | 87%        |
| MKE15-48S15HI  |                     | 15                   | 1,000               | 90%        |
| MKE15-48S24HI  |                     | 24                   | 625                 | 89%        |
| MKE15-48D12HI  |                     | ±12                  | ±625                | 89%        |
| MKE15-48D15HI  |                     | ±15                  | ±500                | 88%        |

## Mechanical Dimensions

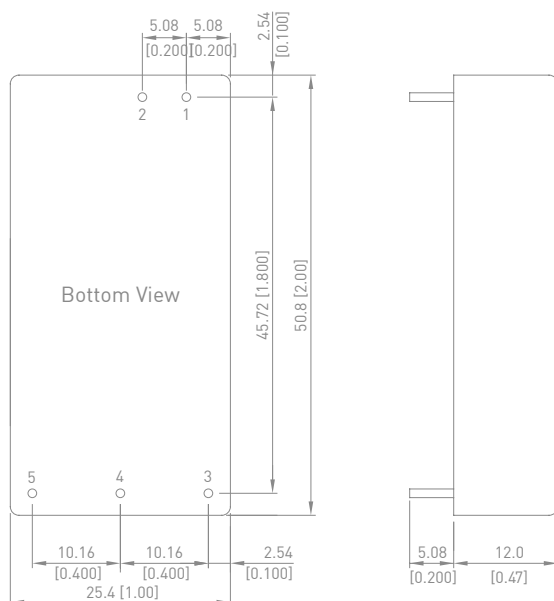


## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 3   | +Vout  | +Vout  |
| 4   | No Pin | Common |
| 5   | -Vout  | -Vout  |



- | Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MKE20-12S05HI  | 12<br>(9 - 18)      | 5                    | 4,000               | 85%        |
| MKE20-12S051HI |                     | 5.1                  | 4,000               | 85%        |
| MKE20-12S12HI  |                     | 12                   | 1,670               | 88%        |
| MKE20-12S15HI  |                     | 15                   | 1,333               | 88%        |
| MKE20-12S24HI  |                     | 24                   | 840                 | 89%        |
| MKE20-12D12HI  |                     | ±12                  | ±840                | 89%        |
| MKE20-12D15HI  |                     | ±15                  | ±670                | 89%        |
| MKE20-24S05HI  | 24<br>(18 - 36)     | 5                    | 4,000               | 87%        |
| MKE20-24S051HI |                     | 5.1                  | 4,000               | 87%        |
| MKE20-24S12HI  |                     | 12                   | 1,670               | 88%        |
| MKE20-24S15HI  |                     | 15                   | 1,333               | 89%        |
| MKE20-24S24HI  |                     | 24                   | 840                 | 90%        |
| MKE20-24D12HI  |                     | ±12                  | ±840                | 90%        |
| MKE20-24D15HI  |                     | ±15                  | ±670                | 90%        |
| MKE20-48S05HI  | 48<br>(36 - 75)     | 5                    | 4,000               | 87%        |
| MKE20-48S051HI |                     | 5.1                  | 4,000               | 87%        |
| MKE20-48S12HI  |                     | 12                   | 1,670               | 88%        |
| MKE20-48S15HI  |                     | 15                   | 1,333               | 90%        |
| MKE20-48S24HI  |                     | 24                   | 840                 | 89%        |
| MKE20-48D12HI  |                     | ±12                  | ±840                | 89%        |
| MKE20-48D15HI  |                     | ±15                  | ±670                | 90%        |

## Pin Connections

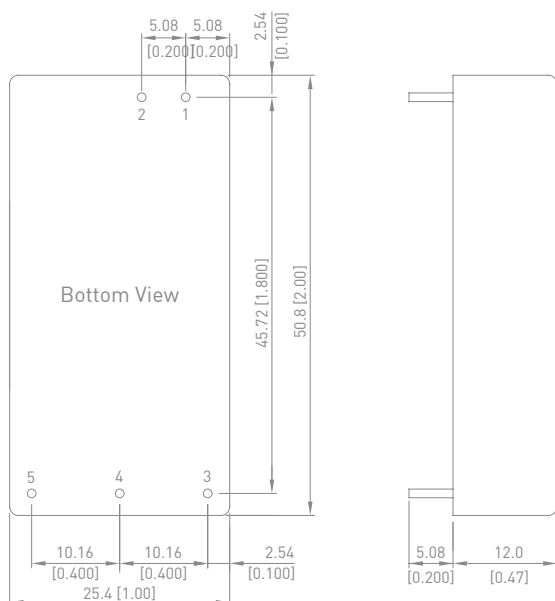

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 3   | +Vout  | +Vout  |
| 4   | No Pin | Common |
| 5   | -Vout  | -Vout  |




# MJA06C Series | 6W



- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- 80-160VDC Wide Input Voltage Range
- Fully Regulated Output Voltage
- High Efficiency up to 84%
- I/O Isolation 3000VAC with Reinforced Insulation, rated for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- No Min. Load Requirement
- Very Low No Load Power Consumption
- Under-voltage, Overload and Short Circuit Protection
- Remote On/Off Control
- EMI Emission EN 55032 Class A Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MJA06-110S05C  | 110<br>(80 - 160)   | 5                    | 1,200               | 79%        |
| MJA06-110S051C |                     | 5.1                  | 1,200               | 79%        |
| MJA06-110S12C  |                     | 12                   | 500                 | 83%        |
| MJA06-110S15C  |                     | 15                   | 400                 | 83%        |
| MJA06-110S24C  |                     | 24                   | 250                 | 84%        |
| MJA06-110S48C  |                     | 48                   | 125                 | 82%        |
| MJA06-110D12C  |                     | ±12                  | ±250                | 84%        |
| MJA06-110D15C  |                     | ±15                  | ±200                | 84%        |
| MJA06-110D24C  |                     | ±24                  | ±125                | 83%        |

## Mechanical Dimensions

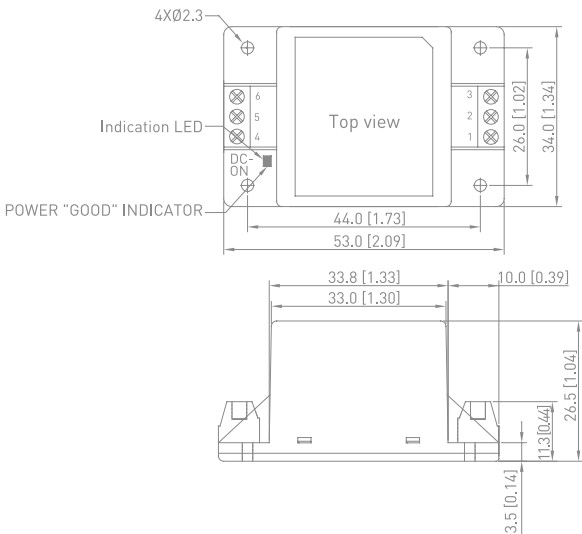

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | Remote On/Off | Remote On/Off |
| 2   | -Vin          | -Vin          |
| 3   | +Vin          | +Vin          |
| 4   | -Vout         | -Vout         |
| 5   | NC            | Common        |
| 6   | +Vout         | +Vout         |

NC= No Connection


## MKA10C Series | 10W



- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
  - 80-160VDC Wide Input Voltage Range
  - Fully Regulated Output Voltage
  - High Efficiency up to 85%
  - I/O Isolation 3000VAC with Reinforced Insulation, rated for 1000Vrms Working Voltage
  - Wide Operating Temperature Range
  - No Min. Load Requirement
  - Very Low No Load Power Consumption
  - Under-voltage, Overload and Short Circuit Protection
  - Remote On/Off Control
  - EMI Emission EN 55032 Class A Approved
  - EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
  - UL/cUL/IEC/EN 62368-1 Safety Approval & CE
- Marking

| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MKA10-110S05C  | 110<br>(80 - 160)   | 5                    | 2,000               | 83%        |
| MKA10-110S051C |                     | 5.1                  | 2,000               | 83%        |
| MKA10-110S12C  |                     | 12                   | 833                 | 85%        |
| MKA10-110S15C  |                     | 15                   | 666                 | 85%        |
| MKA10-110S24C  |                     | 24                   | 416                 | 85%        |
| MKA10-110S48C  |                     | 48                   | 208                 | 83%        |
| MKA10-110D12C  |                     | ±12                  | ±416                | 85%        |
| MKA10-110D15C  |                     | ±15                  | ±333                | 85%        |
| MKA10-110D24C  |                     | ±24                  | ±208                | 84%        |

## Mechanical Dimensions

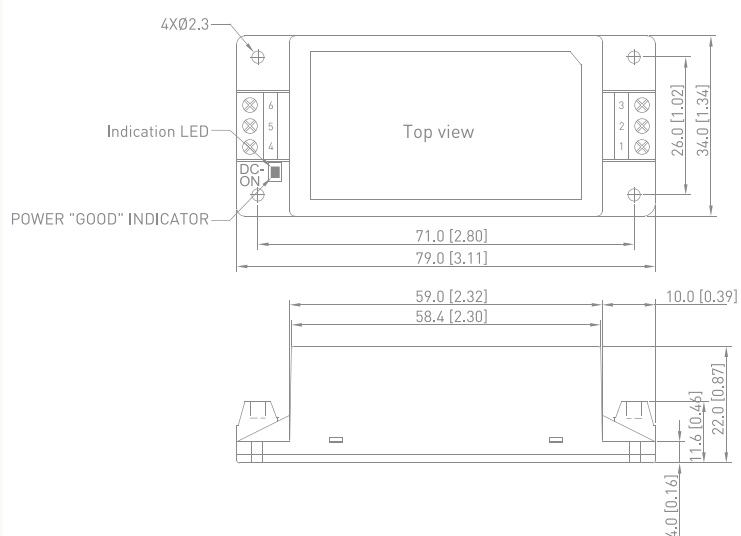

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | Remote On/Off | Remote On/Off |
| 2   | -Vin          | -Vin          |
| 3   | +Vin          | +Vin          |
| 4   | -Vout         | -Vout         |
| 5   | NC            | Common        |
| 6   | +Vout         | +Vout         |

NC= No Connection


# MOA20C Series | 20W



| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MOA20-110S05C  | 110<br>(80 - 160)   | 5                    | 4,000               | 87%        |
| MOA20-110S051C |                     | 5.1                  | 4,000               | 87%        |
| MOA20-110S12C  |                     | 12                   | 1,670               | 88%        |
| MOA20-110S15C  |                     | 15                   | 1,340               | 88%        |
| MOA20-110S24C  |                     | 24                   | 830                 | 88%        |
| MOA20-110S48C  |                     | 48                   | 420                 | 86%        |
| MOA20-110D12C  |                     | ±12                  | ±830                | 87%        |
| MOA20-110D15C  |                     | ±15                  | ±670                | 87%        |
| MOA20-110D24C  |                     | ±24                  | ±420                | 87%        |

- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- 80-160VDC Wide Input Voltage Range
- Fully Regulated Output Voltage
- High Efficiency up to 88%
- I/O Isolation 3000VAC with Reinforced Insulation, rated for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- No Min. Load Requirement
- Very Low No Load Power Consumption
- Under-voltage, Overload/Voltage and Short Circuit Protection
- Remote On/Off Control
- EMI Emission EN 55032 Class A Approved
- EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

## Mechanical Dimensions

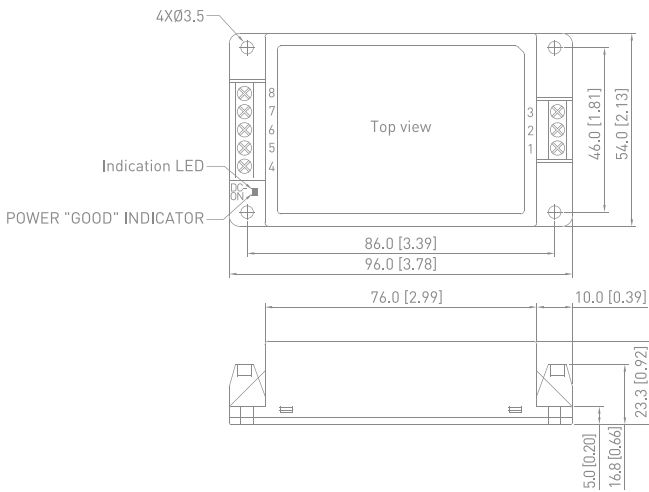

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | Remote On/Off | Remote On/Off |
| 2   | -Vin          | -Vin          |
| 3   | +Vin          | +Vin          |
| 4   | NC            | NC            |
| 5   | -Vout         | -Vout         |
| 6   | NC            | Common        |
| 7   | +Vout         | +Vout         |
| 8   | NC            | NC            |

NC= No Connection


MQA40C Series | 40W



| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MQA40-110S05C  | 110<br>(80 - 160)   | 5                    | 8,000               | 87%        |
| MQA40-110S051C |                     | 5.1                  | 8,000               | 87%        |
| MQA40-110S12C  |                     | 12                   | 3,330               | 89%        |
| MQA40-110S15C  |                     | 15                   | 2,670               | 89%        |
| MQA40-110S24C  |                     | 24                   | 1,670               | 89%        |
| MQA40-110S48C  |                     | 48                   | 840                 | 87%        |
| MQA40-110D12C  |                     | ±12                  | ±1670               | 89%        |
| MQA40-110D15C  |                     | ±15                  | ±1330               | 89%        |
| MQA40-110D24C  |                     | ±24                  | ±830                | 87%        |

- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- 80-160VDC Wide Input Voltage Range
- Fully Regulated Output Voltage
- High Efficiency up to 89%
- I/O Isolation 3000VAC with Reinforced Insulation, rated for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- No Min. Load Requirement
- Very Low No Load Power Consumption
- Under-voltage, Overload/Voltage and Short Circuit Protection
- Remote On/Off Control
- EMI Emission EN 55032 Class A Approved
- EMC Immunity EN61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

Mechanical Dimensions

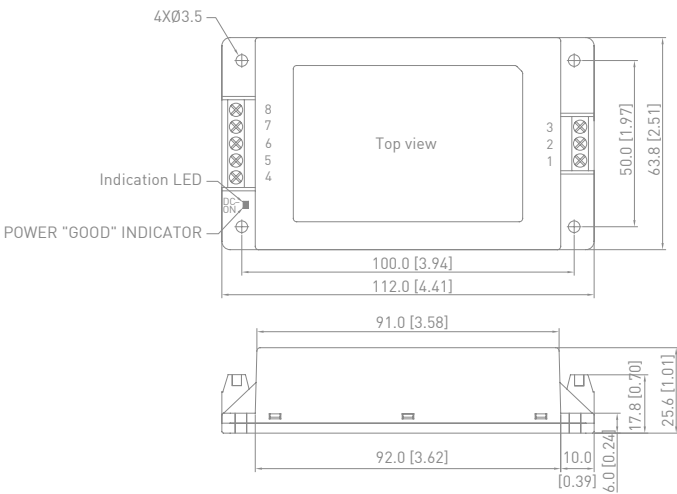

Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | Remote On/Off | Remote On/Off |
| 2   | -Vin          | -Vin          |
| 3   | +Vin          | +Vin          |
| 4   | +Vout         | +Vout         |
| 5   | NC            | NC            |
| 6   | -Vout         | Common        |
| 7   | NC            | NC            |
| 8   | NC            | -Vout         |

NC= No Connection


# MRA60C Series | 60W



| Model Number   | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|----------------|---------------------|----------------------|---------------------|------------|
| MRA60-110S05C  | 110<br>(80 - 160)   | 5                    | 12,000              | 88%        |
| MRA60-110S051C |                     | 5.1                  | 12,000              | 88%        |
| MRA60-110S12C  |                     | 12                   | 5,000               | 89%        |
| MRA60-110S15C  |                     | 15                   | 4,000               | 89%        |
| MRA60-110S24C  |                     | 24                   | 2,500               | 88%        |
| MRA60-110S48C  |                     | 48                   | 1,250               | 88%        |
| MRA60-110D12C  |                     | ±12                  | ±2500               | 88%        |
| MRA60-110D15C  |                     | ±15                  | ±2000               | 88%        |
| MRA60-110D24C  |                     | ±24                  | ±1250               | 88%        |

- Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- 80-160VDC Wide Input Voltage Range
- Fully Regulated Output Voltage
- High Efficiency up to 89%
- I/O Isolation 3000VAC with Reinforced Insulation, rated for 1000Vrms Working Voltage
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- Remote On/Off Control
- EMI Emission EN 55032 Class A Approved
- EMC Immunity EN61000-4-2,3,4,5,6,8 Approved
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

## Mechanical Dimensions

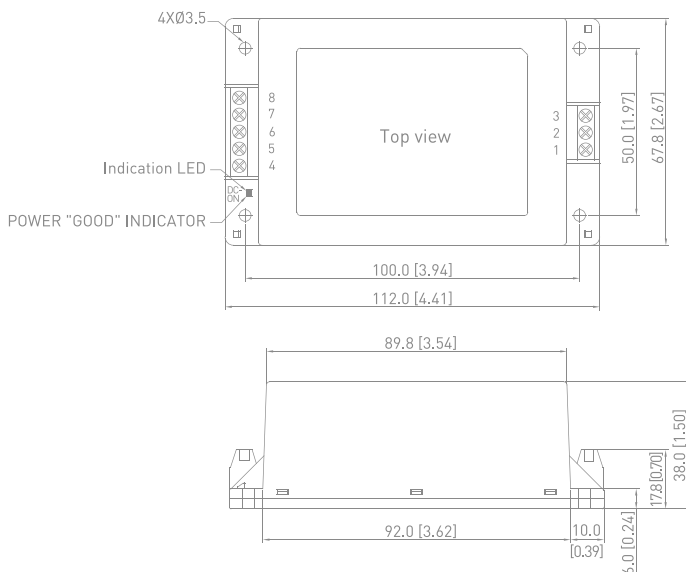

## Pin Connections

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | Remote On/Off | Remote On/Off |
| 2   | -Vin          | -Vin          |
| 3   | +Vin          | +Vin          |
| 4   | NC            | +Vout         |
| 5   | +Vout         | NC            |
| 6   | NC            | Common        |
| 7   | -Vout         | NC            |
| 8   | NC            | -Vout         |

NC= No Connection



# MEDICAL SAFETY POWER SOLUTIONS




IEC 60601-1

IEC 60601-1 APPROVED



2 X MOPP

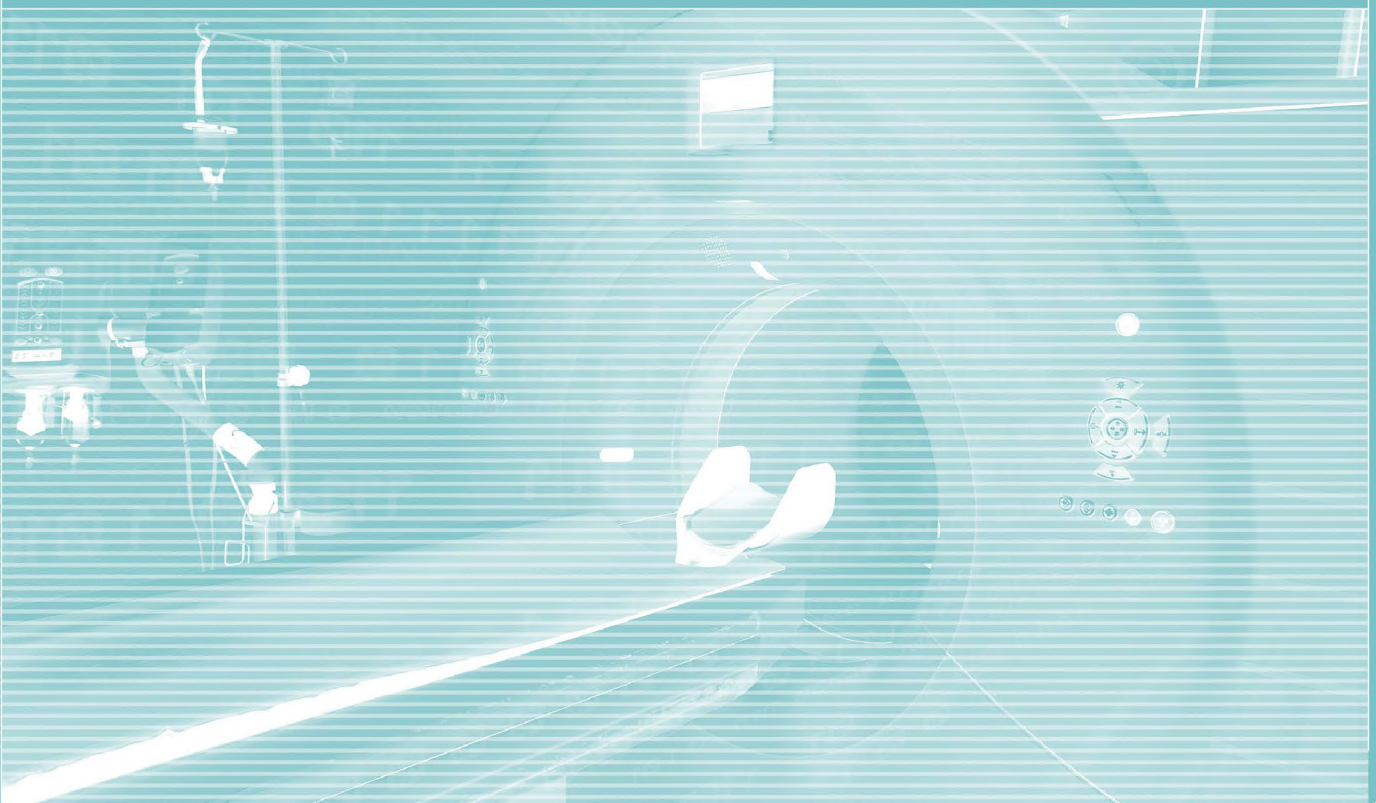


# MAU400 Series | 1W



- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- I/O Isolation 3000VAC with Reinforced Insulation, rated for 300Vrms Working Voltage
- Wide Operating Temperature Range
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 1xMOPP & 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MAU401       | 5<br>(4.5 - 5.5)    | 5                    | 200                 | 66%        |
| MAU402       |                     | 12                   | 80                  | 66%        |
| MAU403       |                     | 15                   | 65                  | 66%        |
| MAU404       |                     | ±5                   | ±100                | 66%        |
| MAU405       |                     | ±12                  | ±40                 | 72%        |
| MAU406       |                     | ±15                  | ±35                 | 73%        |
| MAU411       | 12<br>(10.8 - 13.2) | 5                    | 200                 | 66%        |
| MAU412       |                     | 12                   | 80                  | 66%        |
| MAU413       |                     | 15                   | 65                  | 66%        |
| MAU414       |                     | ±5                   | ±100                | 66%        |
| MAU415       |                     | ±12                  | ±40                 | 74%        |
| MAU416       |                     | ±15                  | ±35                 | 75%        |

## Mechanical Dimensions

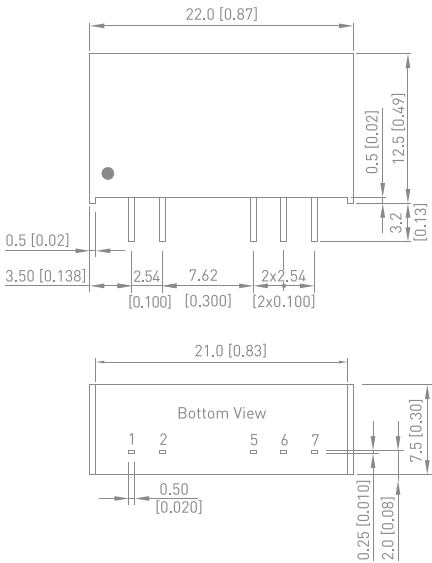

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 5   | -Vout  | -Vout  |
| 6   | No Pin | Common |
| 7   | +Vout  | +Vout  |


# MAU01M Series | 1W



- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- I/O Isolation 4000VAC with Reinforced Insulation, rated for 300Vrms Working Voltage
- Low I/O Leakage Current  $\leftarrow 2\mu\text{A}$
- Wide Operating Temperature Range
- Short Circuit Protection
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MAU01-05S05M | 5<br>(4.5 - 5.5)    | 5                    | 200                 | 79%        |
| MAU01-05S12M |                     | 12                   | 84                  | 80%        |
| MAU01-05S15M |                     | 15                   | 68                  | 81%        |
| MAU01-12S05M | 12<br>(10.8 - 13.2) | 5                    | 200                 | 79%        |
| MAU01-12S12M |                     | 12                   | 84                  | 81%        |
| MAU01-12S15M |                     | 15                   | 68                  | 79%        |
| MAU01-24S05M | 24<br>(21.6 - 26.4) | 5                    | 200                 | 76%        |
| MAU01-24S12M |                     | 12                   | 84                  | 79%        |
| MAU01-24S15M |                     | 15                   | 68                  | 79%        |

## Mechanical Dimensions

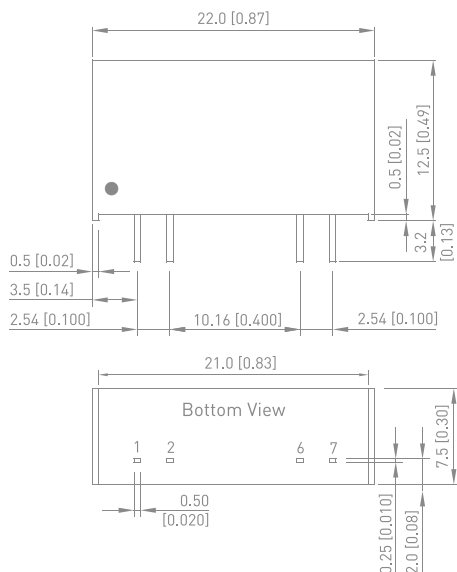

## Pin Connections

| Pin | Dual  |
|-----|-------|
| 1   | +Vin  |
| 2   | -Vin  |
| 6   | -Vout |
| 7   | +Vout |


MSCU01M Series | 1W



- Industrial Standard SMD Package
- Unregulated Output Voltage
- I/O Isolation 4000VAC with Reinforced Insulation, rated for 250Vrms Working Voltage
- Low I/O Leakage Current  $\leftarrow 2\mu\text{A}$
- Wide Operating Temperature Range
- Cleaning-washable Process Available (option)
- Qualified for Lead-free Reflow Solder Process According to IPC/JEDEC J-STD-020D.1
- Tape & Reel Package Available Short Circuit Protection
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MSCU01-05S05M | 5<br>(4.5 - 5.5)    | 5                    | 200                 | 76%        |
| MSCU01-05S12M |                     | 12                   | 84                  | 80%        |
| MSCU01-05S15M |                     | 15                   | 68                  | 83%        |
| MSCU01-05D12M |                     | $\pm 12$             | $\pm 42$            | 80%        |
| MSCU01-05D15M |                     | $\pm 15$             | $\pm 33$            | 84%        |
| MSCU01-12S05M | 12<br>(10.8 - 13.2) | 5                    | 200                 | 76%        |
| MSCU01-12S12M |                     | 12                   | 84                  | 79%        |
| MSCU01-12S15M |                     | 15                   | 68                  | 80%        |
| MSCU01-12D12M |                     | $\pm 12$             | $\pm 42$            | 79%        |
| MSCU01-12D15M |                     | $\pm 15$             | $\pm 33$            | 80%        |
| MSCU01-24S05M | 24<br>(21.6 - 26.4) | 5                    | 200                 | 76%        |
| MSCU01-24S12M |                     | 12                   | 84                  | 80%        |
| MSCU01-24S15M |                     | 15                   | 68                  | 80%        |
| MSCU01-24D12M |                     | $\pm 12$             | $\pm 42$            | 80%        |
| MSCU01-24D15M |                     | $\pm 15$             | $\pm 33$            | 80%        |

Mechanical Dimensions

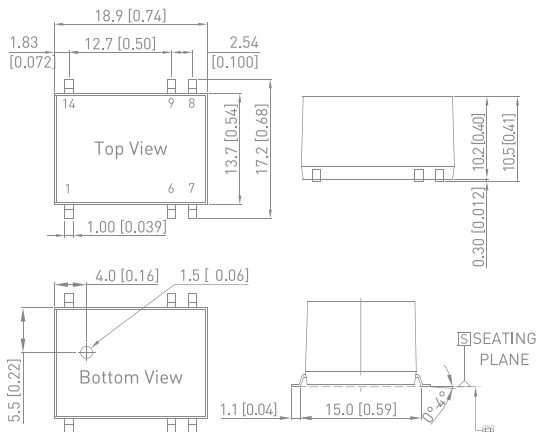

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 6   | NC     | Common |
| 7   | NC     | -Vout  |
| 8   | +Vout  | +Vout  |
| 9   | -Vout  | Common |
| 14  | +Vin   | +Vin   |

NC: No Connection


# MSHU100 Series | 2W



- Industrial Standard SMD Package
  - Unregulated Output Voltage
  - I/O Isolation 4000VAC with Reinforced Insulation, rated for 300Vrms Working Voltage
  - Low I/O Leakage Current  $\leftarrow 2\mu\text{A}$
  - Wide Operating Temperature Range
  - Cleaning-washable Process Available(option)
  - Qualified for Lead-free Reflow Solder Process
- According to IPC/JEDEC J-STD-020D.1
- Tape & Reel Package Available
  - Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
  - Medical Safety with 1xMOPP & 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved
  - UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MSHU102      | 5<br>(4.5 - 5.5)    | 5                    | 400                 | 66%        |
| MSHU104      |                     | 12                   | 165                 | 66%        |
| MSHU105      |                     | 15                   | 133                 | 66%        |
| MSHU108      |                     | $\pm 12$             | $\pm 83$            | 72%        |
| MSHU109      |                     | $\pm 15$             | $\pm 66$            | 73%        |
| MSHU112      | 12<br>(10.8 - 13.2) | 5                    | 400                 | 66%        |
| MSHU114      |                     | 12                   | 165                 | 66%        |
| MSHU115      |                     | 15                   | 133                 | 66%        |
| MSHU118      |                     | $\pm 12$             | $\pm 83$            | 74%        |
| MSHU119      |                     | $\pm 15$             | $\pm 66$            | 75%        |
| MSHU122      | 24<br>(21.6 - 26.4) | 5                    | 400                 | 66%        |
| MSHU124      |                     | 12                   | 165                 | 66%        |
| MSHU125      |                     | 15                   | 133                 | 66%        |
| MSHU128      |                     | $\pm 12$             | $\pm 83$            | 74%        |
| MSHU129      |                     | $\pm 15$             | $\pm 66$            | 75%        |

## Mechanical Dimensions

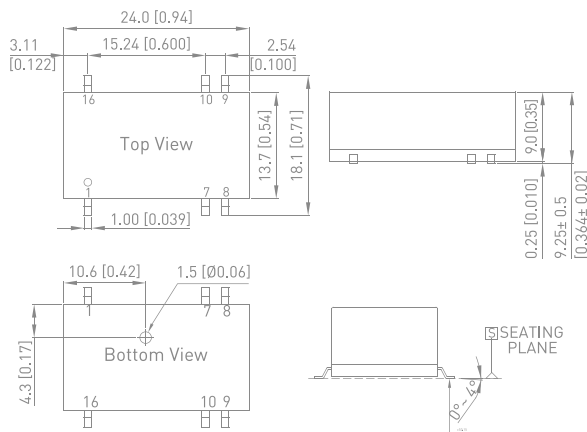

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC: No Connection


MDHU100 Series | 2W



- Industry Standard DIP-16 Package
- Unregulated Output Voltage
- I/O Isolation 4000VAC with Reinforced Insulation, rated or 300Vrms Working Voltage
- Low I/O Leakage Current  $\leftarrow 2\mu\text{A}$
- Wide Operating Temperature Range
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 1xMOPP & 2xMOOP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MDHU102      | 5<br>(4.5 - 5.5)    | 5                    | 400                 | 66%        |
| MDHU104      |                     | 12                   | 165                 | 66%        |
| MDHU105      |                     | 15                   | 133                 | 66%        |
| MDHU108      |                     | $\pm 12$             | $\pm 83$            | 72%        |
| MDHU109      |                     | $\pm 15$             | $\pm 66$            | 73%        |
| MDHU112      | 12<br>(10.8 - 13.2) | 5                    | 400                 | 66%        |
| MDHU114      |                     | 12                   | 165                 | 66%        |
| MDHU115      |                     | 15                   | 133                 | 66%        |
| MDHU118      |                     | $\pm 12$             | $\pm 83$            | 74%        |
| MDHU119      |                     | $\pm 15$             | $\pm 66$            | 75%        |
| MDHU122      | 24<br>(21.6 - 26.4) | 5                    | 400                 | 66%        |
| MDHU124      |                     | 12                   | 165                 | 66%        |
| MDHU125      |                     | 15                   | 133                 | 66%        |
| MDHU128      |                     | $\pm 12$             | $\pm 83$            | 74%        |
| MDHU129      |                     | $\pm 15$             | $\pm 66$            | 75%        |

Mechanical Dimensions

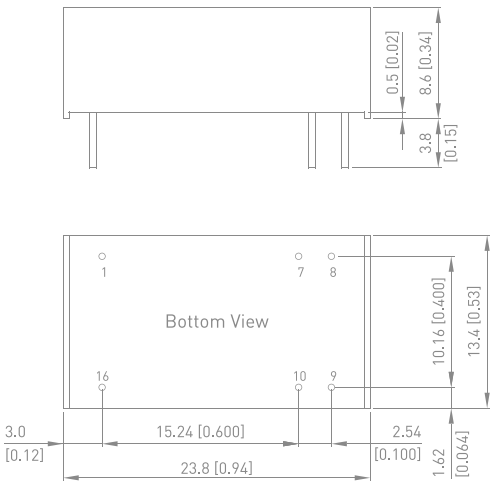

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 7   | NC     | NC     |
| 8   | NC     | Common |
| 9   | +Vout  | +Vout  |
| 10  | -Vout  | -Vout  |
| 16  | +Vin   | +Vin   |

NC: No Connection


# MIHW2000 Series | 3W



- Industrial Standard DIP-24 Package
- Ultra-Wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 4000VAC with Reinforced Insulation, rated for 1000Vrms Working Voltage
- Low I/O Leakage Current  $\leftarrow 2\mu\text{A}$
- Wide Operating Temperature Range
- Under-Voltage, Overload and Short Circuit Protection
- Conducted EMI EN 55011/22 Class A Approved
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 1xMOPP & 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved
- UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MIHW2022     | 24<br>(9 - 40)      | 5                    | 600                 | 78%        |
| MIHW2023     |                     | 12                   | 250                 | 83%        |
| MIHW2026     |                     | $\pm 12$             | $\pm 125$           | 83%        |
| MIHW2027     |                     | $\pm 15$             | $\pm 100$           | 83%        |
| MIHW2032     | 48<br>(18 - 80)     | 5                    | 600                 | 78%        |
| MIHW2033     |                     | 12                   | 250                 | 83%        |
| MIHW2036     |                     | $\pm 12$             | $\pm 125$           | 83%        |
| MIHW2037     |                     | $\pm 15$             | $\pm 100$           | 83%        |
| MIHW2042     | 110<br>(36 - 160)   | 5                    | 600                 | 78%        |
| MIHW2043     |                     | 12                   | 250                 | 83%        |
| MIHW2046     |                     | $\pm 12$             | $\pm 125$           | 83%        |
| MIHW2047     |                     | $\pm 15$             | $\pm 100$           | 83%        |

## Mechanical Dimensions

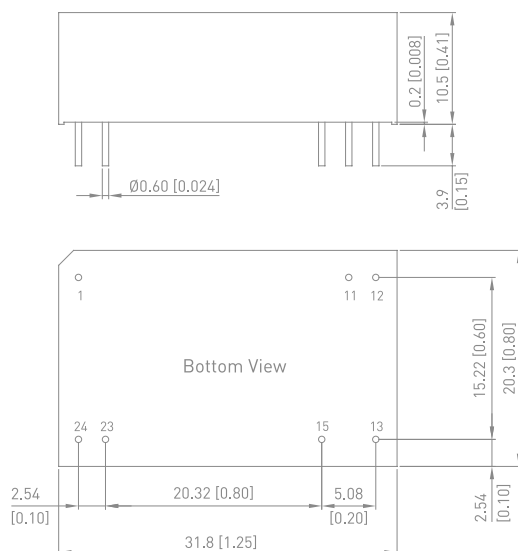

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


## MIW03M Series | 3.5W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 5000VAC with Reinforced Insulation, rated for 250Vrms Working Voltage
- Creepage & Clearance Distance meet 8mm
- Low I/O Leakage Current  $\leftarrow 2\mu\text{A}$
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-Voltage, Overload/Voltage and Short Circuit Protection
- Conducted EMI EN 55011 Class A Approved
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MIW03-05S05M  | 5<br>(4.5 - 9)      | 5                    | 700                 | 83%        |
| MIW03-05S058M |                     | 5.8                  | 600                 | 83%        |
| MIW03-05S12M  |                     | 12                   | 290                 | 84%        |
| MIW03-05S15M  |                     | 15                   | 235                 | 84%        |
| MIW03-05D12M  |                     | $\pm 12$             | $\pm 145$           | 84%        |
| MIW03-05D15M  |                     | $\pm 15$             | $\pm 115$           | 84%        |
| MIW03-12S05M  | 12<br>(9 - 18)      | 5                    | 700                 | 83%        |
| MIW03-12S12M  |                     | 12                   | 290                 | 87%        |
| MIW03-12S15M  |                     | 15                   | 235                 | 87%        |
| MIW03-12D12M  |                     | $\pm 12$             | $\pm 145$           | 87%        |
| MIW03-12D15M  |                     | $\pm 15$             | $\pm 115$           | 87%        |
| MIW03-24S05M  | 24<br>(18 - 36)     | 5                    | 700                 | 83%        |
| MIW03-24S12M  |                     | 12                   | 290                 | 86%        |
| MIW03-24S15M  |                     | 15                   | 235                 | 87%        |
| MIW03-24D12M  |                     | $\pm 12$             | $\pm 145$           | 87%        |
| MIW03-24D15M  |                     | $\pm 15$             | $\pm 115$           | 86%        |
| MIW03-48S05M  | 48<br>(36 - 75)     | 5                    | 700                 | 83%        |
| MIW03-48S12M  |                     | 12                   | 290                 | 86%        |
| MIW03-48S15M  |                     | 15                   | 235                 | 85%        |
| MIW03-48D12M  |                     | $\pm 12$             | $\pm 145$           | 84%        |
| MIW03-48D15M  |                     | $\pm 15$             | $\pm 115$           | 84%        |

## Mechanical Dimensions

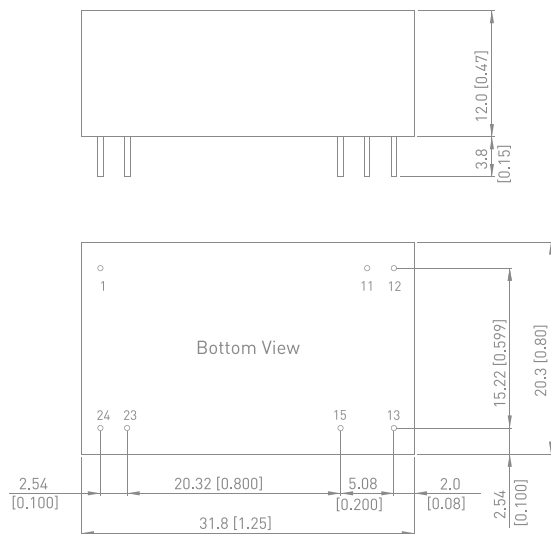

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


# MIW06M Series | 6W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 5000VAC with Reinforced Insulation, rated for 250Vrms Working Voltage
- Creepage & Clearance Distance meet 8mm
- Low I/O Leakage Current  $\leq 2\mu A$
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-Voltage, Overload/Voltage and Short Circuit Protection
- Conducted EMI EN 55011 Class A Approved
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking

| Model Number | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|---------------------|----------------------|---------------------|------------|
| MIW06-12S05M | 12<br>(9 - 18)      | 5                    | 1200                | 84%        |
| MIW06-12S12M |                     | 12                   | 500                 | 87%        |
| MIW06-12S15M |                     | 15                   | 400                 | 86%        |
| MIW06-12D12M |                     | $\pm 12$             | $\pm 250$           | 87%        |
| MIW06-12D15M |                     | $\pm 15$             | $\pm 200$           | 87%        |
| MIW06-24S05M | 24<br>(18 - 36)     | 5                    | 1200                | 84%        |
| MIW06-24S12M |                     | 12                   | 500                 | 87%        |
| MIW06-24S15M |                     | 15                   | 400                 | 87%        |
| MIW06-24D12M |                     | $\pm 12$             | $\pm 250$           | 86%        |
| MIW06-24D15M |                     | $\pm 15$             | $\pm 200$           | 87%        |
| MIW06-48S05M | 48<br>(36 - 75)     | 5                    | 1200                | 84%        |
| MIW06-48S12M |                     | 12                   | 500                 | 87%        |
| MIW06-48S15M |                     | 15                   | 400                 | 89%        |
| MIW06-48D12M |                     | $\pm 12$             | $\pm 250$           | 87%        |
| MIW06-48D15M |                     | $\pm 15$             | $\pm 200$           | 88%        |

## Mechanical Dimensions

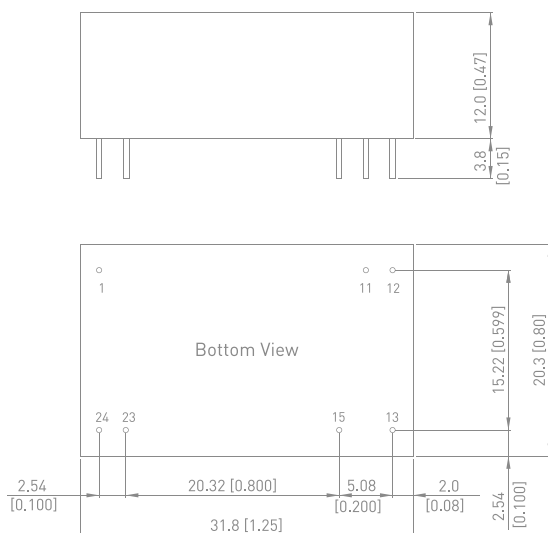

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


## MIW10M Series | 10W



- Industrial Standard DIP-24 Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 5000VAC with Reinforced Insulation, rated for 250Vrms Working Voltage
- Creepage & Clearance Distance meet 8mm
- Low I/O Leakage Current  $\leftarrow 2\mu\text{A}$
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-Voltage, Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55011 Class A Approved
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MIW10-12S033M | 12<br>(9 - 18)      | 3.3                  | 2700                | 81%        |
| MIW10-12S05M  |                     | 5                    | 2000                | 84%        |
| MIW10-12S051M |                     | 5.1                  | 2000                | 84%        |
| MIW10-12S12M  |                     | 12                   | 833                 | 87%        |
| MIW10-12S15M  |                     | 15                   | 666                 | 88%        |
| MIW10-12S24M  |                     | 24                   | 416                 | 88%        |
| MIW10-12D12M  |                     | $\pm 12$             | $\pm 416$           | 88%        |
| MIW10-12D15M  |                     | $\pm 15$             | $\pm 333$           | 87%        |
| MIW10-24S033M | 24<br>(18 - 36)     | 3.3                  | 2700                | 81%        |
| MIW10-24S05M  |                     | 5                    | 2000                | 85%        |
| MIW10-24S051M |                     | 5.1                  | 2000                | 85%        |
| MIW10-24S12M  |                     | 12                   | 833                 | 88%        |
| MIW10-24S15M  |                     | 15                   | 666                 | 88%        |
| MIW10-24S24M  |                     | 24                   | 416                 | 88%        |
| MIW10-24D12M  |                     | $\pm 12$             | $\pm 416$           | 88%        |
| MIW10-24D15M  |                     | $\pm 15$             | $\pm 333$           | 87%        |
| MIW10-48S033M | 48<br>(36 - 75)     | 3.3                  | 2700                | 81%        |
| MIW10-48S05M  |                     | 5                    | 2000                | 85%        |
| MIW10-48S051M |                     | 5.1                  | 2000                | 85%        |
| MIW10-48S12M  |                     | 12                   | 833                 | 88%        |
| MIW10-48S15M  |                     | 15                   | 666                 | 88%        |
| MIW10-48S24M  |                     | 24                   | 416                 | 87%        |
| MIW10-48D12M  |                     | $\pm 12$             | $\pm 416$           | 87%        |
| MIW10-48D15M  |                     | $\pm 15$             | $\pm 333$           | 87%        |

## Mechanical Dimensions

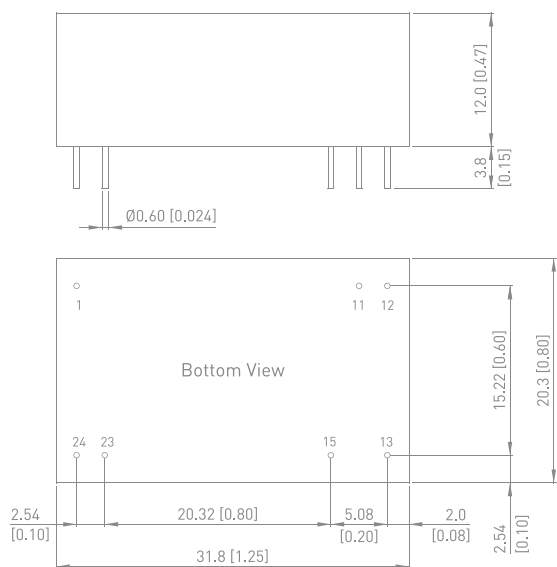

## Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 11  | No Pin | Common |
| 12  | -Vout  | No Pin |
| 13  | +Vout  | -Vout  |
| 15  | No Pin | +Vout  |
| 23  | -Vin   | -Vin   |
| 24  | -Vin   | -Vin   |


## MKW15M Series | 15W



- Industrial Standard 2" X 1" Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 4200VAC with Reinforced Insulation, rated for 300Vrms Working Voltage
- Low I/O Leakage Current  $\leftarrow 5\mu\text{A}$
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55011 Class A Approved
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MKW15-12S05M  | 12<br>(9 - 18)      | 5                    | 3000                | 86%        |
| MKW15-12S051M |                     | 5.1                  | 3000                | 86%        |
| MKW15-12S12M  |                     | 12                   | 1250                | 89%        |
| MKW15-12S15M  |                     | 15                   | 1000                | 88%        |
| MKW15-12S24M  |                     | 24                   | 625                 | 88%        |
| MKW15-12D12M  |                     | $\pm 12$             | $\pm 625$           | 88%        |
| MKW15-12D15M  |                     | $\pm 15$             | $\pm 500$           | 89%        |
| MKW15-24S05M  | 24<br>(18 - 36)     | 5                    | 3000                | 88%        |
| MKW15-24S051M |                     | 5.1                  | 3000                | 88%        |
| MKW15-24S12M  |                     | 12                   | 1250                | 89%        |
| MKW15-24S15M  |                     | 15                   | 1000                | 89%        |
| MKW15-24S24M  |                     | 24                   | 625                 | 90%        |
| MKW15-24D12M  |                     | $\pm 12$             | $\pm 625$           | 90%        |
| MKW15-24D15M  |                     | $\pm 15$             | $\pm 500$           | 89%        |
| MKW15-48S05M  | 48<br>(36 - 75)     | 5                    | 3000                | 88%        |
| MKW15-48S051M |                     | 5.1                  | 3000                | 88%        |
| MKW15-48S12M  |                     | 12                   | 1250                | 88%        |
| MKW15-48S15M  |                     | 15                   | 1000                | 90%        |
| MKW15-48S24M  |                     | 24                   | 625                 | 89%        |
| MKW15-48D12M  |                     | $\pm 12$             | $\pm 625$           | 89%        |
| MKW15-48D15M  |                     | $\pm 15$             | $\pm 500$           | 88%        |

### Mechanical Dimensions

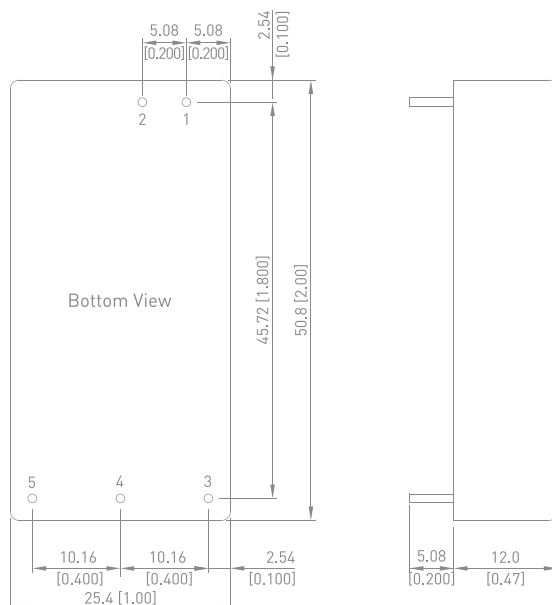

### Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 3   | +Vout  | +Vout  |
| 4   | No Pin | Common |
| 5   | -Vout  | -Vout  |


MKW20M Series | 20W



- Industrial Standard 2" X 1" Package
- Wide 2:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 4200VAC with Reinforced Insulation, rated for 300Vrms Working Voltage
- Low I/O Leakage Current  $\leftarrow 5\mu\text{A}$
- Wide Operating Temperature Range
- No Min. Load Requirement
- Under-voltage, Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55011 Class A Approved
- Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking

| Model Number  | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|---------------|---------------------|----------------------|---------------------|------------|
| MKW20-12S05M  | 12<br>(9 - 18)      | 5                    | 4000                | 86%        |
| MKW20-12S051M |                     | 5.1                  | 4000                | 86%        |
| MKW20-12S12M  |                     | 12                   | 1670                | 89%        |
| MKW20-12S15M  |                     | 15                   | 1333                | 88%        |
| MKW20-12S24M  |                     | 24                   | 840                 | 89%        |
| MKW20-12D12M  |                     | $\pm 12$             | $\pm 840$           | 89%        |
| MKW20-12D15M  |                     | $\pm 15$             | $\pm 670$           | 89%        |
| MKW20-24S05M  | 24<br>(18 - 36)     | 5                    | 4000                | 88%        |
| MKW20-24S051M |                     | 5.1                  | 4000                | 88%        |
| MKW20-24S12M  |                     | 12                   | 1670                | 89%        |
| MKW20-24S15M  |                     | 15                   | 1333                | 89%        |
| MKW20-24S24M  |                     | 24                   | 840                 | 90%        |
| MKW20-24D12M  |                     | $\pm 12$             | $\pm 840$           | 90%        |
| MKW20-24D15M  |                     | $\pm 15$             | $\pm 670$           | 90%        |
| MKW20-48S05M  | 48<br>(36 - 75)     | 5                    | 4000                | 88%        |
| MKW20-48S051M |                     | 5.1                  | 4000                | 88%        |
| MKW20-48S12M  |                     | 12                   | 1670                | 89%        |
| MKW20-48S15M  |                     | 15                   | 1333                | 90%        |
| MKW20-48S24M  |                     | 24                   | 840                 | 89%        |
| MKW20-48D12M  |                     | $\pm 12$             | $\pm 840$           | 89%        |
| MKW20-48D15M  |                     | $\pm 15$             | $\pm 670$           | 90%        |

Mechanical Dimensions

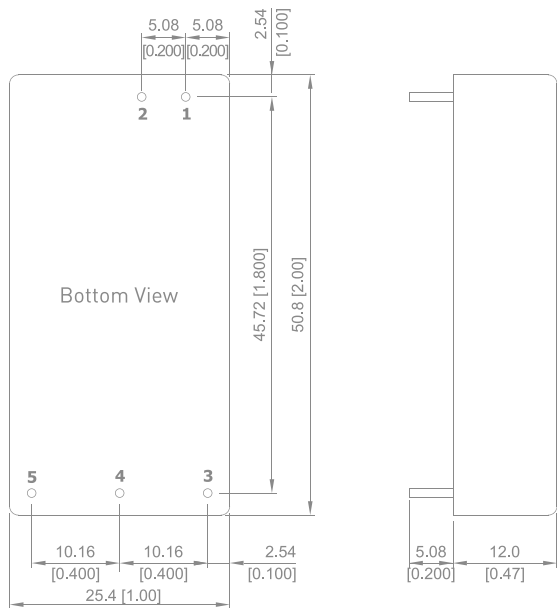

Pin Connections

| Pin | Single | Dual   |
|-----|--------|--------|
| 1   | +Vin   | +Vin   |
| 2   | -Vin   | -Vin   |
| 3   | +Vout  | +Vout  |
| 4   | No Pin | Common |
| 5   | -Vout  | -Vout  |

## AJM-24 Series | 24W




| Model Number | Input Voltage           | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|-------------------------|----------------------|---------------------|------------|
| AJM-24S05    | 85-264VAC<br>120-370VDC | 5                    | 3,000               | 77%        |
| AJM-24S09    |                         | 9                    | 2,666               | 82%        |
| AJM-24S12    |                         | 12                   | 2,000               | 83%        |
| AJM-24S15    |                         | 15                   | 1,600               | 82%        |
| AJM-24S24    |                         | 24                   | 1,000               | 85%        |
| AJM-24D12    |                         | ±12                  | ±1000               | 84%        |
| AJM-24D15    |                         | ±15                  | ±800                | 84%        |


- Fully Encapsulated Plastic Case for PCB, Chassis and DIN-Rail Mounting Version
- Universal Input 85-264VAC, 47-440Hz
- I/O Isolation 4000VAC with Reinforced Insulation
- Wide Operating Temperature Range
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55011/32 Class B Approved
- EMS Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- Medical EMC Standard with 4th Edition of EMI EN 55011 & EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved
- UL508 Safety Approval Specifically for Industrial Application
- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

### Mechanical Dimensions

#### PCB

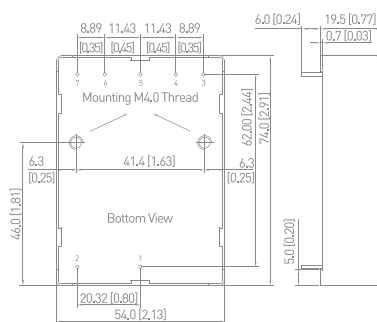

#### Chassis

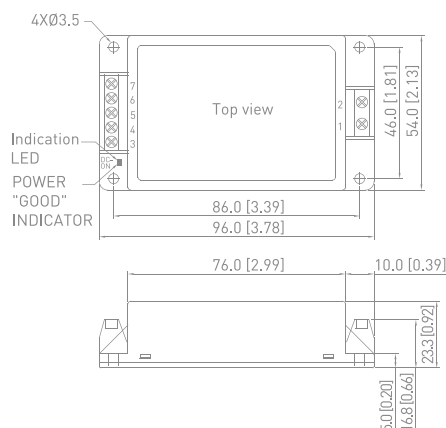

### Pin Connections (PCB&Chassis)


| Pin | Single     | Dual       |
|-----|------------|------------|
| 1   | AC Netural | AC Netural |
| 2   | AC Line    | AC Line    |
| 3   | No Pin     | No Pin     |
| 4   | -Vout      | -Vout      |
| 5   | No Pin     | Common     |
| 6   | +Vout      | +Vout      |
| 7   | No Pin     | No Pin     |



- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

| Model Number | Input Voltage           | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|-------------------------|----------------------|---------------------|------------|
| APM-40S05    | 85-264VAC<br>120-370VDC | 5                    | 8,000               | 81%        |
| APM-40S12    |                         | 12                   | 3,330               | 84%        |
| APM-40S15    |                         | 15                   | 2,660               | 85%        |
| APM-40S24    |                         | 24                   | 1,660               | 84%        |
| APM-40D12    |                         | ±12                  | ±1660               | 84%        |
| APM-40D15    |                         | ±15                  | ±1330               | 85%        |

### Pin Connections (PCB&Chassis)

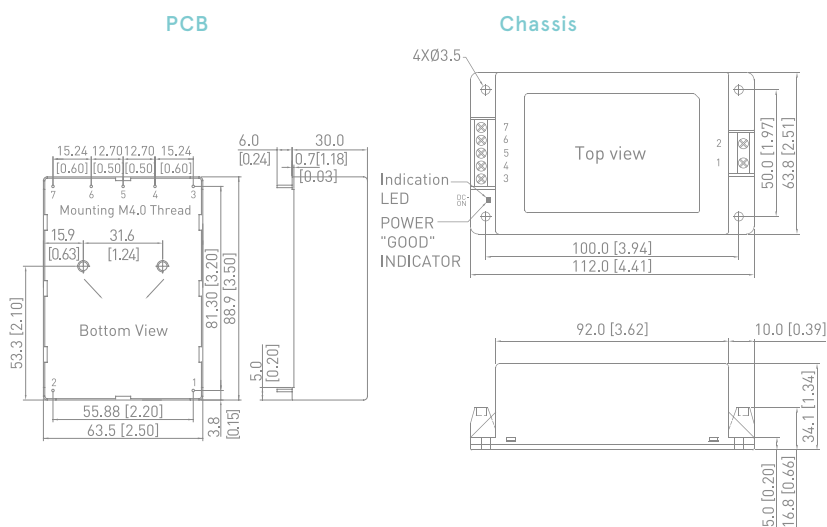

| Pin | PCB        | Chassis    |
|-----|------------|------------|
| 1   | AC Netural | AC Netural |
| 2   | AC Line    | AC Line    |
| 3   | +Vout      | +Vout      |
| 4   | No Pin     | No Pin     |
| 5   | -Vout      | Common     |
| 6   | No Pin     | No Pin     |
| 7   | NC         | -Vout      |

NC: No Connection

# AYM-60 Series | 60W



| Model Number | Input Voltage           | Output Voltage (VDC) | Output Current (mA) | Efficiency |
|--------------|-------------------------|----------------------|---------------------|------------|
| AYM-60S051   | 85-264VAC<br>120-370VDC | 5.1                  | 10,000              | 84%        |
| AYM-60S12    |                         | 12                   | 5,000               | 87%        |
| AYM-60S15    |                         | 15                   | 4,000               | 87%        |
| AYM-60S24    |                         | 24                   | 2,500               | 87%        |
| AYM-60S48    |                         | 48                   | 1,250               | 88%        |



- Fully Encapsulated Plastic Case for PCB, Chassis and DIN-Rail Mounting Version
- Universal Input 85-264VAC, 47-440Hz
- I/O Isolation 4000VAC with Reinforced Insulation
- Wide Operating Temperature Range
- Overload/Voltage and Short Circuit Protection
- EMI Emission EN 55011/32 Class B Approved
- EMS Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- Medical EMC Standard with 4th Edition of EMI EN 55011 & EMS EN 60601-1-2 Approved
- Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved
- UL508 Safety Approval Specifically for Industrial Application


- UL/cUL/IEC/EN 62368-1, UL/cUL 60950-1 Safety Approval & CE Marking

## Mechanical Dimensions

## Pin Connections

### PCB

### Chassis

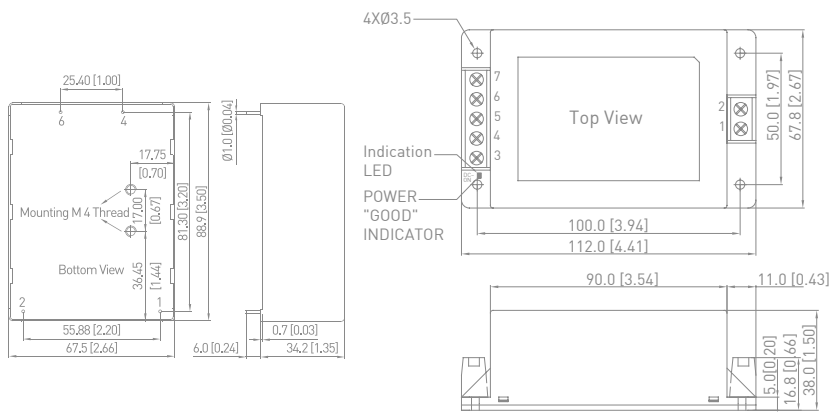

| Pin | Single     | Dual       |
|-----|------------|------------|
| 1   | AC Netural | AC Netural |
| 2   | AC Line    | AC Line    |
| 3   | -          | NC         |
| 4   | +Vout      | +Vout      |
| 5   | -          | NC         |
| 6   | -Vout      | -Vout      |
| 7   | -          | NC         |





**POWER FOR  
A BETTER FUTURE**

FOR MORE INFO, PLEASE GO TO  [www.minmaxpower.com](http://www.minmaxpower.com)





ADDRESS

No.77,Sec.1,Zhonghua W.Rd.,  
South Dist.,Tainan City 702,Taiwan

MAIL

[sales@minmax.com.tw](mailto:sales@minmax.com.tw)

TELEPHONE

**(+886) 6-2923150**

FAX

**(+886) 6-2923149**

